


NUMBER  
305183

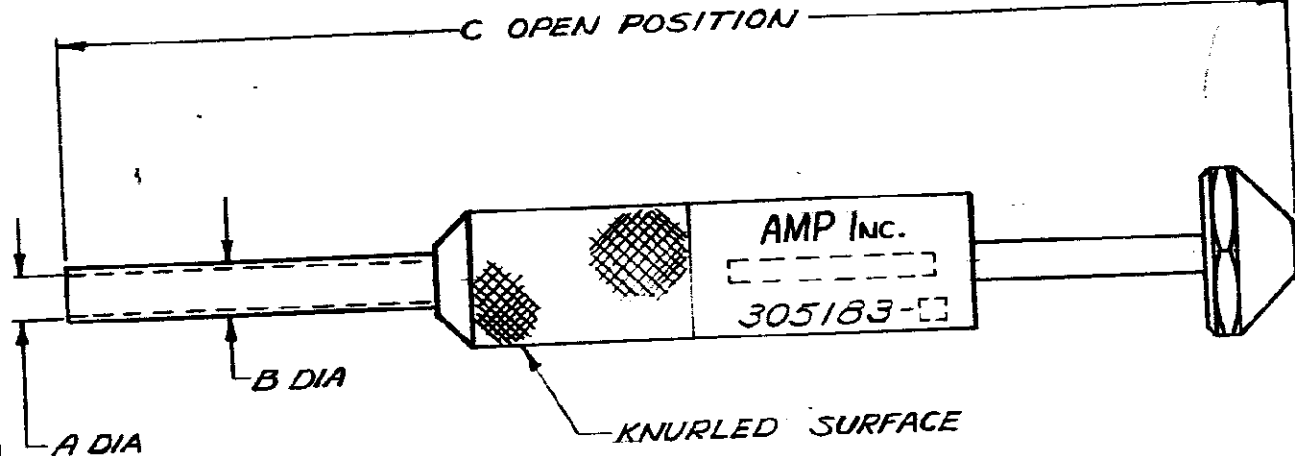

1-305183-3	A.R.L. POWER CONN.	.227	.243	4 <sup>1</sup> / <sub>16</sub>
1-305183-2	M-N-LOK SOCKET	.111	.160	3 <sup>15</sup> / <sub>16</sub>
1-305183-1	M-N-LOK PIN	.087	.119	3 <sup>15</sup> / <sub>16</sub>
1-305183-0	NASA PATCH TIP	.113	.154	3 <sup>15</sup> / <sub>16</sub>
305183-7	8	.256	.284	4 <sup>1</sup> / <sub>8</sub>
305183-6	10	.227	.251	4 <sup>1</sup> / <sub>16</sub>
305183-5	12	.189	.206	4
305183-4	14	.162	.179	4
305183-3	16-20	.137	.155	3 <sup>15</sup> / <sub>16</sub>
305183-2	20	.103	.119	3 <sup>15</sup> / <sub>16</sub>
305183	16-20	.115	.129	3 <sup>15</sup> / <sub>16</sub>
PART NO.	SIZE	A	E	C

DIMENSIONS IN INCHES. DO NOT SCALE PRINT.

SUPERSEDED  
NOT the LATEST  
VISION

**CUSTOMER COPY  
REFERENCE ONLY**

**TE** TE Connectivity

MATERIAL AND FINISH  
STEEL & ALUMINUM  
BLACK OXIDE

CLASS #

WIRE RANGE INSULATION TYPE #

TOLERANCE EXCEPT AS NOTED ± 0.15

SCALE #

LOC NO

NO 305183

REV G2

G2	REVISED PER ECO-11-005294	RK	HMR	05APR 11
TR	REVISION RECORD	DR	CHK	DATE
DR	DE	APP		
36	6/15/64			

NAME		TOOL - EXTRACTION	
------	--	-------------------	--