

**EKM-2051-2D1-5S/U-LK-E3**  
**Art.-Nr.: CS0605-000 (JOR-89807)**






**Fuse box for lighting application EKM 2051**  
**according to DIN 43628 / VDE 0660 T. 505**

explanation SK (for installation in lighting columns)

- protection class II
  - ingress protection IP 54
  - minimum diameter 100 mm
  - door opening minimum 85 x 400 mm
  - l x w x h: 337 x 82 x 82 mm
  - transparent cover with screw
  - protection cover
  - compact- terminal block comprising:
    - 2 fuse bases 16 A / D01-E 14,
    - 2 fuses 6 A / E 14
    - 2 screw caps E 14
    - 5 sliding terminals
  - rail connection (brass rails, nickel-plated)
  - fully insulated PE- and N- output terminals
  - entry terminals for 2 cables to 4 x 25 mm<sup>2</sup> or 3 cables to 5 x 16 mm<sup>2</sup>
  - type of mains: (N), L1, L2, <L3>, PE(N), for all net configurations
  - cable break out area (60 mm)
  - 2 mounting rails TS 35 for application of installation devices
  - 2 pc 2- conductors- light terminals with connecting cables
  - pre- mounting earthing cable, 10 mm<sup>2</sup>, green / yellow, 400 mm long, with ring cable lug for screw M 8
  - 2 pole clamping screws M 6 x 12
  - cable entry: cable clamp for 1 cable to 3 cables  $\varnothing$  19-22 mm
  - output: 2 cable glands, cable  $\varnothing$  8-14 mm
- Two additional luminaire cables can be routed towards the bottom of the box.

Circuit diagram:

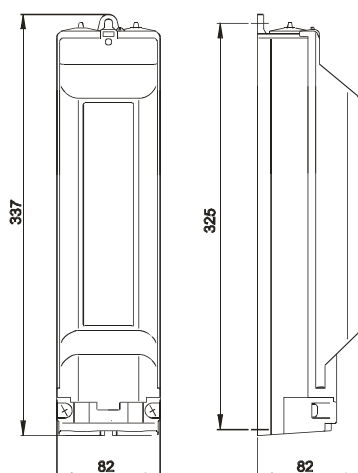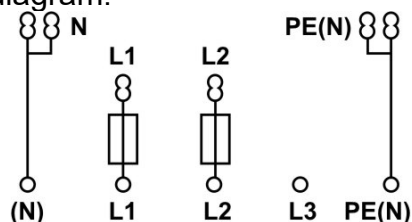

Cable entry

