

# GaAs SP6T Switch, Absorptive, Single Supply DC - 4.0 GHz

**SW90-0004A**  
**V7**

## Features

- Operates DC - 4 GHz on Single Supply
- ASIC TTL / CMOS Driver
- Leadless 4 x 7 mm Chip Scale Plastic Package
- Low DC Power Consumption
- 50 Ohm Nominal Impedance
- Test Boards are Available
- Tape and Reel are Available

## Description

M/A-COM's SW90-0004A is a SP6T absorptive pHEMT switch with integral TTL driver. This device is in an MLP plastic surface mount package. This switch offers excellent broadband performance and repeatability from DC to 4 GHz, while maintaining low DC power dissipation. The SW90-0004A is ideally suited for wireless infrastructure applications.

## Ordering Information

| Part Number   | Package                     |
|---------------|-----------------------------|
| SW90-0004A    | Bulk Packaging              |
| SW90-0004ATR  | 1000 piece reel             |
| SW90-0004A-TB | Units Mounted on Test Board |


Note: Reference Application Note M513 for reel size information.

## Absolute Maximum Ratings <sup>1,2</sup>

| Parameter  | Absolute Maximum                        |
|--|---|
| Max. Input Power<br>0.05 GHz<br>0.5 - 4.0 GHz                    | +27 dBm<br>+34 dBm                      |
| Bias Voltages<br>V <sub>CC</sub><br>Control Voltage <sup>3</sup> | +5.5V<br>-0.5V to V <sub>CC</sub> +0.5V |
| Operating Temperature  | -40°C to +85°C                          |
| Storage Temperature  | -65°C to +125°C                         |

1. Operation of this device above any one of these parameters may cause permanent damage.
2. When the RF input is applied to the terminated port, the absolute maximum power is +30 dBm.
3. Standard CMOS TTL interface, latch-up will occur if logic signal is applied prior to power supply.

## Functional Schematic

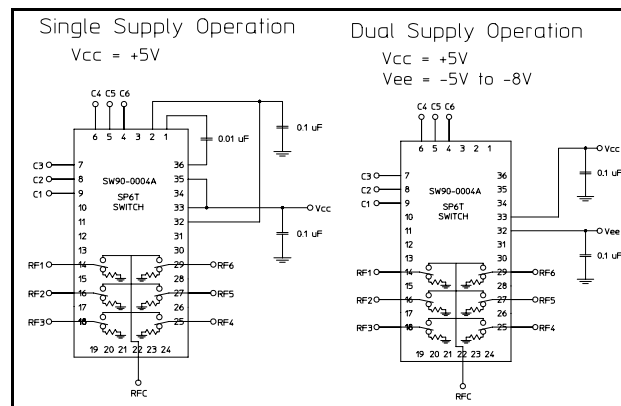

## Pin Configuration <sup>4,5,6</sup>

| Pin No. | Function        | Pin No. | Function        |
|---------|-----------------|---------|-----------------|
| 1       | CP2             | 19      | GND             |
| 2       | V <sub>EE</sub> | 20      | NC              |
| 3       | NC              | 21      | GND             |
| 4       | C6              | 22      | RFC             |
| 5       | C5              | 23      | GND             |
| 6       | C4              | 24      | GND             |
| 7       | C3              | 25      | RF4             |
| 8       | C2              | 26      | GND             |
| 9       | C1              | 27      | RF5             |
| 10      | NC              | 28      | GND             |
| 11      | GND             | 29      | RF6             |
| 12      | NC              | 30      | GND             |
| 13      | GND             | 31      | NC              |
| 14      | RF1             | 32      | V <sub>EE</sub> |
| 15      | GND             | 33      | V <sub>CC</sub> |
| 16      | RF2             | 34      | NC              |
| 17      | GND             | 35      | V <sub>CC</sub> |
| 18      | RF3             | 36      | CP1             |

4. NC = No Connection
5. For single supply operation V<sub>EE</sub> is internally generated and must remain isolated from external power supplies. Generated noise is typical of switching DC-DC Converters.
6. Connections and external components shown in functional schematic are required. 0.1μF Capacitors need to be located near pins 32 & 33.

**GaAs SP6T Switch, Absorptive, Single Supply  
 DC - 4.0 GHz**
**SW90-0004A  
 V7**
**Electrical Specifications:  $T_A = 25^\circ\text{C}$** 

| Parameter                        | Test Conditions  | Frequency     | Units              | Min. | Typ. | Max.  |
|----------------------------------|--|---------------|--------------------|------|------|-------|
| Insertion Loss                   | RFC-RF1, 2, 3, 4, 5, 6   | DC - 3.0 GHz  | dB                 | —    | —    | 2.1   |
|                                  |  | 3.0 - 4.0 GHz | dB                 | —    | —    | 2.4   |
| Isolation                        | —  | DC - 4.0 GHz  | dB                 | 25   | —    | —     |
| VSWR                             | On (RFC, RF1-RF6)<br>Logic per Truth Table                       | DC - 4.0 GHz  | Ratio              | —    | —    | 2.0:1 |
|                                  | Off (RF1-RF6)<br>Logic per Truth Table                           | DC - 4.0 GHz  | Ratio              | —    | —    | 2.0:1 |
| 1 dB Compression                 | —  | 50 MHz        | dBm                | —    | 15   | —     |
|                                  | —  | 0.5 - 4.0 GHz | dBm                | —    | 27   | —     |
| Input $IP_3$                     | Two-tone inputs up to +5 dBm                                     | 50 MHz        | dBm                | —    | 30   | —     |
|                                  |  | 0.5-4.0 GHz   | dBm                | —    | 40   | —     |
| Switching Speed                  | Ton (50% Control to 10% RF)                                      |               | nS                 | —    | 20   | —     |
|                                  | Toff (50% Control to 90% RF)                                     |               | nS                 | —    | 15   | —     |
|                                  | Trise (10% to 90% RF)  |               | nS                 | —    | 5    | —     |
|                                  | Tfall (90% to 10% RF)  |               | nS                 | —    | 2    | —     |
| Vcc                              | —  | —             | V                  | 4.5  | 5.0  | 5.5   |
| Logic "0"                        | Sink Current is 20 $\mu\text{A}$ max.                            | —             | V                  | 0.0  | —    | 0.8   |
| Logic "1"                        | Source Current is 20 $\mu\text{A}$ max.                          | —             | V                  | 2.0  | —    | 5.0   |
| Icc <sup>7</sup>                 | Vcc min to max, Logic "0" or "1"                                 | —             | mA                 | —    | 5    | 8     |
| Turn-on Current <sup>8</sup>     | For guaranteed start-up  | —             | mA                 | —    | —    | 125   |
| Switching Noise                  | Generated from<br>DC-DC Converter with<br>recommended capacitors | 3.5 MHz       | dBm                | —    | -93  | —     |
| Thermal Resistance $\theta_{jc}$ | —  | —             | $^\circ\text{C/W}$ | —    | 15   | —     |

7. During turn-on, the device requires an initial start up current (Icc) specified as "Turn-on Current". Once operational, Icc will drop to the specified levels. This is not applicable to dual supply operation.

8. The DC-DC converter is guaranteed to start in 100  $\mu\text{s}$  as long as the power supplies have the maximum turn-on current available for start-up.

**Truth Table**


| Control Inputs                  |    |    |    |    |    | Condition of Switch       |     |     |     |     |     |
|---------------------------------|----|----|----|----|----|---------------------------|-----|-----|-----|-----|-----|
| "0" is TTL Low, "1" is TTL High |    |    |    |    |    | RF Common to Each RF Port |     |     |     |     |     |
| C1                              | C2 | C3 | C4 | C5 | C6 | RF1                       | RF2 | RF3 | RF4 | RF5 | RF6 |
| 1                               | 0  | 0  | 0  | 0  | 0  | On                        | Off | Off | Off | Off | Off |
| 0                               | 1  | 0  | 0  | 0  | 0  | Off                       | On  | Off | Off | Off | Off |
| 0                               | 0  | 1  | 0  | 0  | 0  | Off                       | Off | On  | Off | Off | Off |
| 0                               | 0  | 0  | 1  | 0  | 0  | Off                       | Off | Off | On  | Off | Off |
| 0                               | 0  | 0  | 0  | 1  | 0  | Off                       | Off | Off | Off | On  | Off |
| 0                               | 0  | 0  | 0  | 0  | 1  | Off                       | Off | Off | Off | Off | On  |

# GaAs SP6T Switch, Absorptive, Single Supply DC - 4.0 GHz


SW90-0004A  
V7

## Typical Performance Curves


*Insertion Loss vs. Frequency*

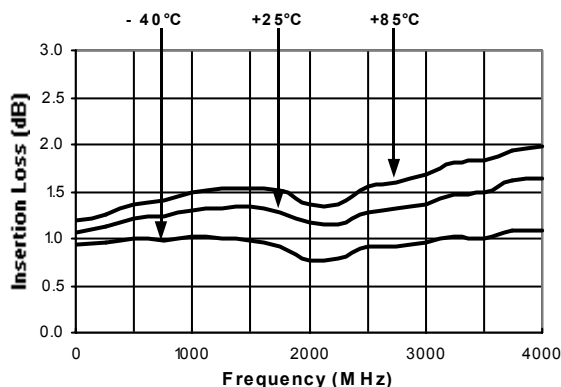


*Isolation (dB) vs. Frequency*

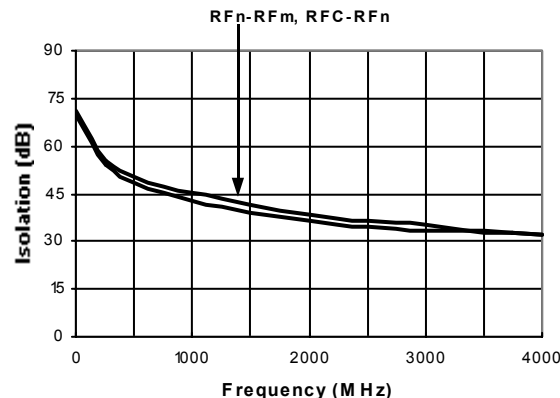


*On VSWR vs. Frequency*

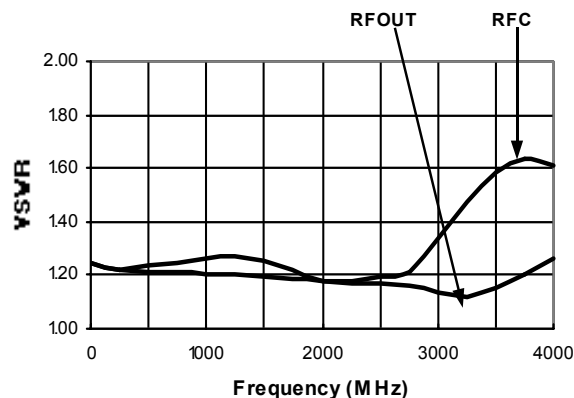

*VSWR (Terminations) vs. Frequency*

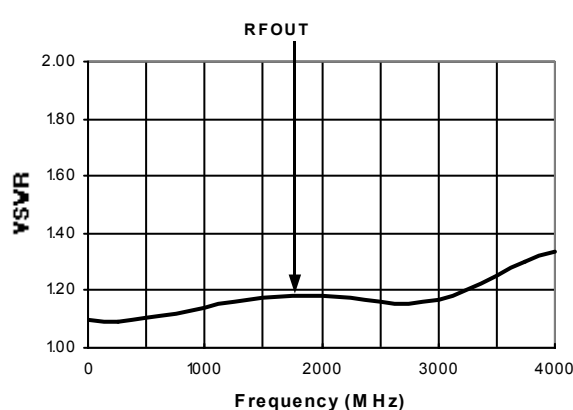

*IP3 Results <sup>10</sup>*

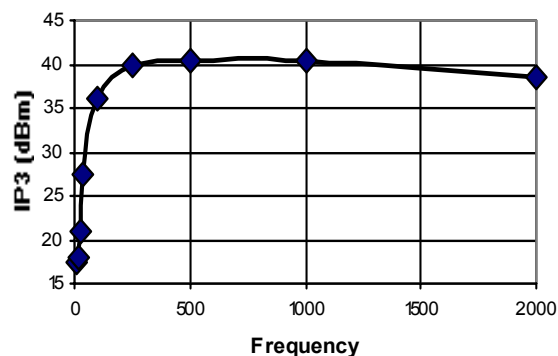


10. All testing done with the second tone 5 MHz above the frequency on the plot, except for the 10 MHz point, where the second tone is at 11 MHz. Both tones are +5 dBm.

# GaAs SP6T Switch, Absorptive, Single Supply DC - 4.0 GHz

SW90-0004A  
V7

## Recommended PCB Layout <sup>9</sup>

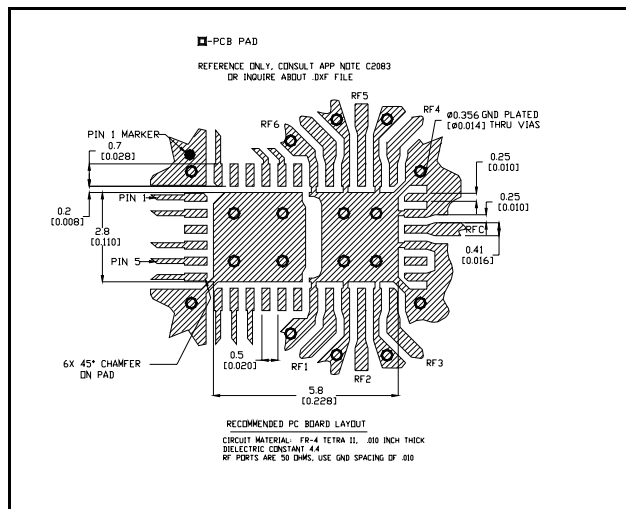

9. Application Note C2083 is available on line at [www.macom.com](http://www.macom.com).

## CSP-2

