



## Features

- $\pm 10.5$  V Amplified Voltage Output
- Unipolar or Bipolar Power Supply / Output
- Zero and Gain Adjust Potentiometer
- Connector and / or Sealed Cable Output

## Applications

- Suited for Wheatstone Bridge Sensors
- For on board sensor installation
- Laboratory and Research

## XAM

- In-line Voltage Amplifier
- Small dimensions
- Cable Gland or Connector Output

## DESCRIPTION

TE Connectivity offers comprehensive measurement solutions including electronic signal conditioning and display units.

The XAM is a miniature in-line amplifier that adapts to most Wheatstone bridge-based sensors (fitted with semiconductor or metal gauges).

The power supply is unipolar on the XAM-MV, which accepts 10 to 30 V unregulated voltage with outputs up to 10.5 V. The bipolar version XAM-BV requires  $\pm 12$  to  $\pm 18$  V regulated and stabilized supply with a maximum signal output of  $\pm 10.5$  V. The zero can be adjusted within 20% of the dynamic range by a potentiometer, externally accessible. The gain is usually a factory set, but a gain set potentiometer allows individual fine adjustments.

When used with metal gauge fitted sensors (or semiconductor gauges in a half-bridge configuration) a shunt calibration resistance can be built into the amplifier to be easily set by the end-user. The standard version is supplied with a miniature connector on the sensor's side of the amplifier to facilitate installation. With its rugged and compact housing, the XAM is designed for on-board applications.

**PERFORMANCE SPECIFICATIONS**

All values are typical at temperature 20 ±1°C

**General Characteristics**

Dimensions	Diameter 15mm [.59 in]
Material	Aluminum Alloy
Connections	Miniature connector and cable gland
Weight w/o cable	< 30 g [.066 lb]
Operating Temperature	-10° C to 70° C [14 to 158° F]
Storage Temperature	-20° C to 80° C [-4 to 176° F]
Wiring	Shielded cable to power supply (version CP) or sensor (version PC) Standard length 2 m (6.5 ft)

**Amplifier Performance**

Gain G	10 to 1000 ±5 %
Gain Adjust Potentiometer	± 20 %
Frequency Response (-3dB)	20kHz@G=10, 4kHz @ G=100, 400Hz @ G=1000



**Electrical characteristics-MV (unipolar)**

Power Required (Vin)	10 to 30 Vdc	15 to 30 Vdc
Output Signal (Vout)	0.5 V to 5.5 V max	0.5 V to 10.5 V max
Sensor Supply Voltage (Function of Vin)	5 V max. Vin=10Vmin	10 V max. Vin=15 V min
Exit Voltage Drift	100 ppm /° C	
Zero Offset Minimum	0.5V	
Zero Adjust	To 20% of Vout	
Gain Adjust	± 5 % of nominal gain	
Input Impedance	1GΩ	
Output Impedance	10Ω	
Output Current	5 mA max	
Current Consumption	Depending on connected sensor	
Common Mode Ratio Rejection	> 95dB min	
Input Protection	Reverse polarity protected	
Average Input Offset Drift	5μ V /° C	

**Electrical Characteristics- BV (Bipolar)**

Power Required (Vin)	±12 to ±18 V	± 15 to ± 18 V
	Regulated and stabilized	regulated and stabilized
Output Signal (Vout)	±7.5 V max	±10.5 V max
Sensor Supply Voltage (function of Vin)	7 V max Vin=± 12 V min	10 V max. Vin=± 15 V min
Exit Voltage Drift	100 ppm /° C	
Zero Offset	0 V	
Zero Adjust	To 20% of Vout	
Gain Adjust	± 5 % of nominal gain	
Input Impedance	1 GΩ	
Output Impedance	10 Ω	
Output Current	5 mA max	
Current Consumption	Depending on connected sensor	
Common Mode Ratio Rejection	>95 dB min	
Input Protection	Reverse Polarity Protected	
Average Input Offset Drift	5 μV/° C	


**DIMENSIONS & WIRING SCHEMATIC (IN METRIC AND IMPERIAL)**

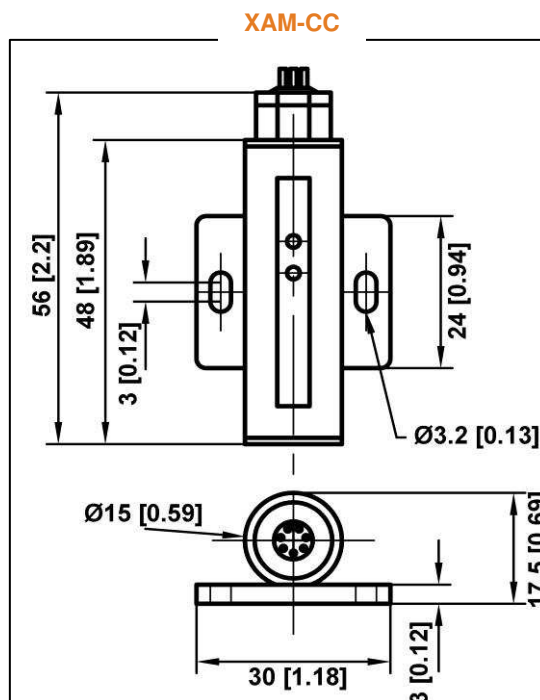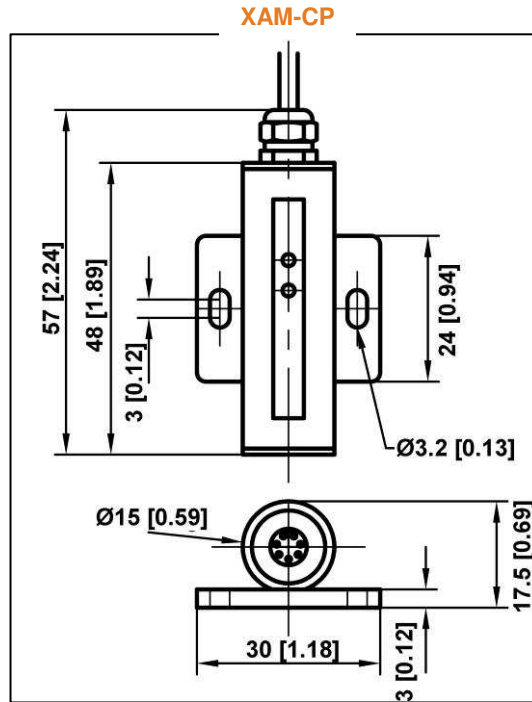

## XAM

### In-line Voltage Amplifier

## Ordering Information

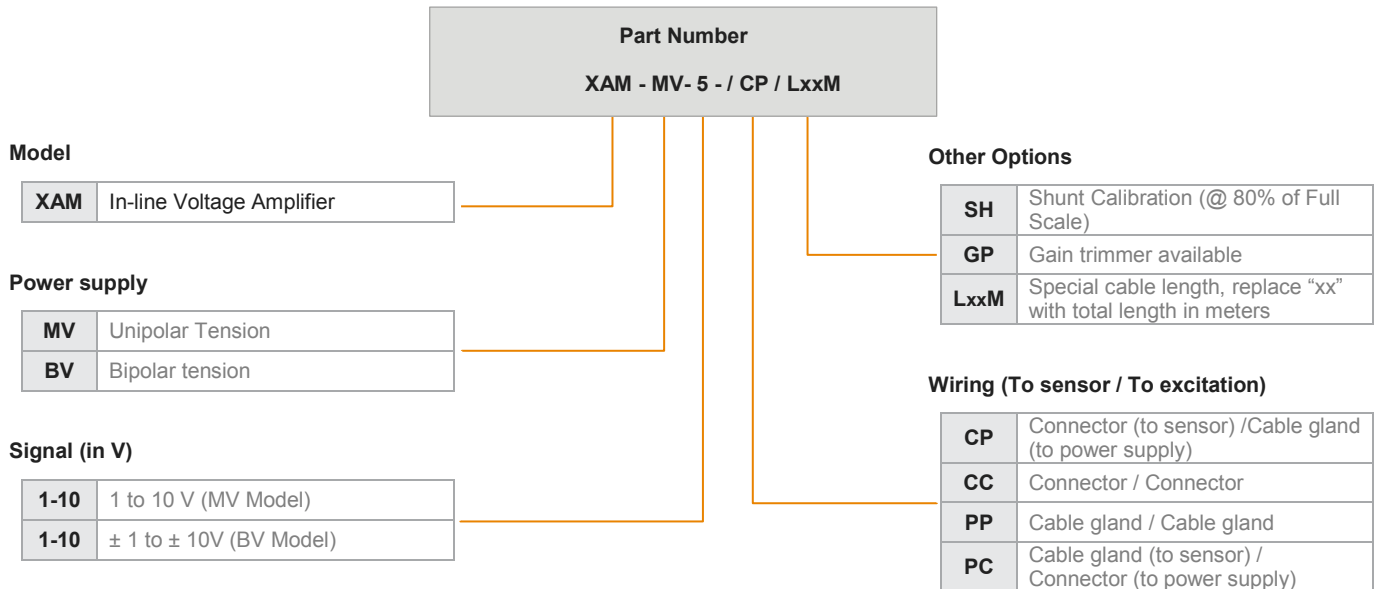

## te.com

TE Connectivity, TE, TE Connectivity (logo) and Every Connection Counts are trademarks. All other logos, products and/or company names referred to herein might be trademarks of their respective owners

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

© 2019 TE Connectivity Corporation. All Rights Reserved.

Version # 04/2020

