



The product described in this document has not been fully tested to ensure conformance to the requirements outlined below. Therefore, TE Connectivity (TE) makes no representation or warranty, express or implied, that the product will comply with these requirements. Further, TE may change these requirements based on the results of additional testing and evaluation. Contact TE Engineering for further details.

040III Series

1. SCOPE

1.1. Content

This specification covers the requirements for product performance, test methods and quality assurance provisions of 040III Series

1.2. Qualification

When tests are performed on the subject product line, procedures specified in Figure 1 shall be used. All inspections shall be performed using the applicable inspection plan and product drawing.

1.3. Qualification Test Results

Successful qualification testing on the subject product line has not been completed. The Qualification Test Report number will be issued upon successful qualification testing.

2. APPLICABLE DOCUMENTS AND FORMS

The following documents and forms constitute a part of this specification to the extent specified herein. Unless otherwise indicated, the latest edition of the document applies.

2.1. TE Documents

- 936497 : Customer Drawing (040 III CAP ASSY 16P)
- 936471 : Customer Drawing (040 III PLUG ASSY 16P)
- 936500 : Customer Drawing (040 III CAP ASSY 20P)
- 936473 : Customer Drawing (040 III PLUG ASSY 20P)
- 936475 : Customer Drawing (040 III PLUG ASSY 24P)
- 936503 : Customer Drawing (040 III PLUG ASSY 24P)

3. REQUIREMENTS

3.1. Design and Construction

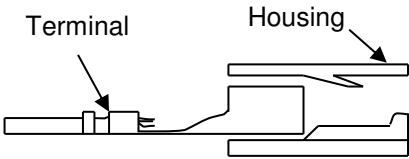
Product shall be of the design, construction, materials and physical dimensions specified on the applicable product drawing.

3.2. Ratings

| Voltage | Temperature | Humidity |
|---------|-------------|----------|
| 12V DC | 25±5°C | 65±20% |

3.3. Test Requirements and Procedures Summary

Unless otherwise specified, all tests shall be performed at ambient environmental conditions.

| TEST DESCRIPTION | REQUIREMENT | PROCEDURE |
|--|--|---|
| Appearance | No crack, damage, distortion are permitted | Using sense of sight and touch. |
| CONN engage and disengage force | 16P, 20P 15kgf or less 24P 18kgf or less | Measure force by inserting and disengaging the connector with terminal assembled at constant 50 mm/min speed. However, remove lock part when measuring disengage force. |
| Reverse insertion between housings | It shall not be incorrectly inserted by applying force of 20kgf. | <ol style="list-style-type: none"> 1) Insert terminal to housing 2) Fix housing of female connector to moving part of measuring instrument in reverse insertion direction. (Reverse insertion: 180 degree rotation on the locking part) 3) Set a measuring instrument to stop at force of 20kgf and insert that. At this moment, monitor resistance of one terminal matched to identify current carrying between terminals. 4) Check the insertion by housing modification of male connector after connector insertion. |
| Reverse insertion between terminal and housing | 5kgf or more | Crimp cable of maximum size on terminal and then insert it into housing by end of insulation barrel in the reserve direction. |
| Engage force between terminal and housing | Max 1.5kgf or less | <p>As shown in the following figure 4-1, measure the weight while inserting terminal into fixed housing at 100mm/min speed.</p>  <p style="text-align: right;"><Figure 4-1></p> |
| CONN Clip panel engage and retention force | Engage: Max 12kgf or less Retention: Min 15kgf or more | <ol style="list-style-type: none"> 1. Insert clip into the fixed plate that can be furnished with clip at 100mm/min and measure the force at that time. 2. Pull clip at 100mm.min and measure the force when destroyed or disengaged |
| Strength of HSG lock | Min 8kgf or more | Combine housing on ly, fix the one side of housing in completely locked condition, and extend the other side in axial direction and 30 angle direction at a constant speed of 50mm/min. Then measure weight when lock structure is disengaged or destroyed. |
| HSG lock releasing force | Max 6kgf | Apply force (F) to lock releasing part, and measure weight on the point of A=0. However, cut connector and then perform |

| | | test at the section in order to secure visibility. | | | | | | | | | | | | |
|---|-------------------------|---|----------------------|--------------|-----------------------|----------|----------------|---------------|-------|-------------|---------------|------|-----|----------------------|
| | | <p><Figure 5-2></p> | | | | | | | | | | | | |
| Terminal retention force | Min 8kgf | Fix the housing after inserting crimped terminals. Extend one line of cable in axial direction at a speed of 50mm/min at a position 50~100mm away from crimped part, and measure weight when terminal is disengaged from the housing. | | | | | | | | | | | | |
| Terminal engage and disengage force (kgf) | Engage | 0.2~0.8kgf | | | | | | | | | | | | |
| | Disengage | 0.15~0.8kgf | | | | | | | | | | | | |
| | | | | | | | | | | | | | | |
| Crimp strength (kgf) | 0.5SQ: Min 9kgf or more | Fix the crimped terminal, and draw the cable at a position 50~100 mm away from crimped part in axial direction at 100 mm/min speed. Then measure the weight when cable is cut or disengaged from the crimped part | | | | | | | | | | | | |
| Voltage Drop | Max 5mV/A | <p>Measure the circuit voltage drop (V) by sending voltage and current described in the table 5-1 with terminal combined on the connector. Then calculate a voltage drop (VD) in terminal by subtracting cable resistance (L) from the circuit voltage drop (V).</p> <p>1) HARNESS versus UNIT: $VD = V(L3+L4)$</p> <table border="1"> <thead> <tr> <th>Application</th> <th>Open voltage</th> <th>Short circuit current</th> <th>Division</th> </tr> </thead> <tbody> <tr> <td>Signal circuit</td> <td>20 ± 5 mV</td> <td>10 mA</td> <td>ECU, Sensor</td> </tr> <tr> <td>Power circuit</td> <td>13 V</td> <td>1 A</td> <td>Other than the above</td> </tr> </tbody> </table> <p><Table5-1></p> | Application | Open voltage | Short circuit current | Division | Signal circuit | 20 ± 5 mV | 10 mA | ECU, Sensor | Power circuit | 13 V | 1 A | Other than the above |
| Application | Open voltage | Short circuit current | Division | | | | | | | | | | | |
| Signal circuit | 20 ± 5 mV | 10 mA | ECU, Sensor | | | | | | | | | | | |
| Power circuit | 13 V | 1 A | Other than the above | | | | | | | | | | | |
| Insulation resistance | Min 100 MΩ | <p>Measure resistance between neighbor terminals (figure 5-6), and between terminal and housing surface (figure 5-7) with DC 500V insulation resistance gauge with connector combined.</p> <p><Figure 5-6: Between neighboring terminals> <Figure 5-7: Between neighboring terminal and housing surface></p> | | | | | | | | | | | | |
| Leakage current | 10 μA or less | Measure it by applying DC 14V between neighboring terminals (figure 5-6). | | | | | | | | | | | | |

| | | | | | | | | | | | |
|--|---------------------------------|--|---|--|---|---------------------------------|-----------------|--------------------------|------------------------------------|--------------------------|--------------------------------|
| | | | | <p><Figure 5-6: Between neighboring terminals></p> | | | | | | | |
| High voltage test | No allowed insulation breakdown | | | Measured by applying test potential of 1000 V AC between the adjacent contact between the contact and housing. | | | | | | | |
| Temperature rise | Max 30 °C | | | Apply basic current ($I = I_0 * K$) of clause to the connector with electrodes in series in the room free from wind (normal temperature). And measure a temperature of crimped part after reaching saturation temperature. Then calculate a temperature of crimped part by subtracting ambient temperature from the temperature. | | | | | | | |
| Twisting Test - Connector Engage and Disengage Endurance Test | Appearance | No crack, damage, distortion are permitted | | Apply 8kgf force on the end part of combined connector 10 times each in the (front, rear, left, right) directions perpendicular to axial direction. | | | | | | | |
| | Voltage Drop | Max 10mV/A | | Make combine connectors engage and disengage at 100mm/min. Perform it 50 times. (Do not use locking device) | | | | | | | |
| Overcurrent cycle test | Appearance | No crack, damage distortion are permitted | | Engage and disengage connector with terminal assembled 10 times with hands, and apply the following current 1000 cycles for the connector with electrodes in series at 60 °C of ambient temperature. | | | | | | | |
| | Voltage Drop | Max 10mV/A | Condition A | | <table border="1"> <tr> <td>Current application condition A</td> <td>Applied current</td> <td>2 times of basic current</td> </tr> <tr> <td></td> <td>Current application time</td> <td>1 minute - ON, 9 minutes - OFF</td> </tr> </table> | Current application condition A | Applied current | 2 times of basic current | | Current application time | 1 minute - ON, 9 minutes - OFF |
| | | | Current application condition A | | Applied current | 2 times of basic current | | | | | |
| | | Current application time | 1 minute - ON, 9 minutes - OFF | | | | | | | | |
| | | Condition B | <table border="1"> <tr> <td>Current application condition B</td> <td>Applied current</td> <td>5 times of basic current</td> </tr> <tr> <td></td> <td>Current application time</td> <td>10 seconds - ON, 590 seconds - OFF</td> </tr> </table> | Current application condition B | Applied current | 5 times of basic current | | Current application time | 10 seconds - ON, 590 seconds - OFF | | |
| Current application condition B | Applied current | 5 times of basic current | | | | | | | | | |
| | Current application time | 10 seconds - ON, 590 seconds - OFF | | | | | | | | | |
| Temp rise | Max 40°C | Condition A | | | | | | | | | |
| | | Condition b | | | | | | | | | |
| Cold temperature test | Appearance | No crack, damage, distortion are permitted | | Engage and disengage connector with terminal assembled 10 times with hands, and leave it in temperature chamber of -40°C for 120 hours. Make connector engaged and disengaged 5 times immediately, and drop it onto the concrete surface from 1m height 3 times in the direction of figure 6-1. (Voltage drop & Temperature rise test perform at normal temperature) : | | | | | | | |
| | Voltage Drop | Max 10mV/A | | | | | | | | | |
| | Insulation Resistance | Min 10kΩ | Between terminals | | | | | | | | |
| | | | housing surface | | | | | | | | |
| Current Leakage | Max 1mA | | | <p><Figure 6-1></p> | | | | | | | |

| | | | | | | | | |
|-------------------------------------|----------------------------|--|--------------------------------------|---|------------------|----------------------|------|----------------------------|
| Cold and hot temperature shock test | Appearance | No crack, damage, distortion are permitted | | Engage and disengage Connector with terminal assembled 10 times with hands, this repeats 200 CYCLE by below test condition. (Non-Sealed : 80°C) | | | | |
| | Voltage Drop | Max 10mV/A | | | | | | |
| High temperature test | Appearance | No crack, damage, distortion are permitted | | Engage and disengage connector with terminal assembled 10 times with hands, and leave it in combined state at the temperature chamber of the table 6-1 for 300 hours. Then pick it out and leave it until it returns to normal temperature. <table border="1"> <tr> <td>High Temperature</td> <td>Connector Using Part</td> </tr> <tr> <td>80°C</td> <td>Non - Waterproof Connector</td> </tr> </table> | High Temperature | Connector Using Part | 80°C | Non - Waterproof Connector |
| | High Temperature | Connector Using Part | | | | | | |
| 80°C | Non - Waterproof Connector | | | | | | | |
| Temperature Humidity Test | Appearance | No crack, damage, distortion are permitted | | Engage and disengage connector with terminal assembled 10 times with hands, and leave it at 25°C ambient temperature and 65% relative humidity for 25 hours. And perform 5 cycles of the method specified in figure 6-3. Then pick connector out of chamber and dry it for 2 hours or more. | | | | |
| | Voltage Drop | Max 10mV/A | | | | | | |
| | Insulation Resistance | Min 10kΩ | Between terminals housing surface | | | | | |
| | Current Leakage | Max 1mA | | | | | | |
| Dust Test | Appearance | No crack, damage, distortion are permitted | | Engage and disengage connector with terminal assembled 10 times with hands, and diffuse 1.5kg Portland cement(JIS R5210) with fan (or others) for 10 seconds per 15 minutes while maintaining 150mm distance from wall in the closed container of 900~1200mm length, width and height, with connector combined. After 1 hour, measure it. | | | | |
| | Voltage Drop | Max 10mV/A | | | | | | |
| Oil and liquid test | Appearance | No crack, damage, distortion are permitted | | Engage and disengage connector with terminal assembled 10 times with hands, and perform test each sample with connector combined. A. Immerge connector in combined state for 2 hours in mixed oil of 50± 2°C ENG oil (SAE10W) or equivalent oil and B. Immerge connector in combined state for 1 hour in car gasoline (JIS K2202) at normal temperature, and then pick it out. C. Immerge connector in combined state for 1 hour in brake liquid (pure product) at normal temperature, and then pick it out. D. Immerge connector in combined state for 1 hour in 100% washer liquid (pure product) at normal temperature, and then pick it out. E. Immerge connector in combined state for 1 hour in 50% LLC (Long life coolant) at normal temperature, and then pick it out. | | | | |
| | Voltage Drop | Max 10mV/A | | | | | | |

| Ozone Test | Appearance | No crack, damage, distortion are permitted | Engage and disengage Connector with terminal assembled 10 times with hands, and samples keep at 40°C and 50±5pphm Ozone for 100hour. Then pick connector out of chamber and dry it for 2hours or more. | | | | | | | | | | | | | | | | |
|------------------------------------|---|--|--|----------|-----------|------------------------------|-----------------------------|-----------------|---|---------------------------|---|------------------------|------|-----------|--|----------------|---------------------------|----------------------------|-------------------|
| | Voltage Drop | Max 10mV/A | | | | | | | | | | | | | | | | | |
| Sulfur (SO ₂) gas test | Appearance | No crack, damage, distortion are permitted | Engage and disengage connector with terminal assembled 10 times with hands, and expose it in combined state to sulfur gas of 40±3°C, density 10ppm, humidity 90~95%, for 24 hours. Then pick connector out of chamber and dry it for 2 hours or more. | | | | | | | | | | | | | | | | |
| | Voltage Drop | Max 10mV/A | | | | | | | | | | | | | | | | | |
| Complex environment endurance test | Appearance | No crack, damage, distortion are permitted | Engage and disengage connector with terminal assembled 10 times with hands, and leave it in combined state in the temperature chamber of 120°C or 80°C (follows table 7) for 48 hours. And then perform the following vibration test. Then measure instant short circuit according to the method of clause 4.16 for 4 hours for X, Y, Z each. 1) Sin Wave Test | | | | | | | | | | | | | | | | |
| | Crimp Tensile Strength | 0.5SQ Min 9kgf 2.0SQ Min 20kgf | | | | | | | | | | | | | | | | | |
| | Voltage Drop | Max 10mV/A | | | | | | | | | | | | | | | | | |
| | Temperature Rise | Max 40°C | | | | | | | | | | | | | | | | | |
| | Instant short circuit | Max 10 μ S | | | | | | | | | | | | | | | | | |
| | | <table border="1"> <thead> <tr> <th>Division</th> <th>Condition</th> </tr> </thead> <tbody> <tr> <td>Ambient temperature/humidity</td> <td>Refer to figure 4-8, 90~95%</td> </tr> <tr> <td>Applied current</td> <td>Basic current (Connector electrodes in series.)</td> </tr> <tr> <td>Current application cycle</td> <td>120 CYCLE (45 minutes-ON, 15 minutes-OFF)</td> </tr> <tr> <td>Vibration acceleration</td> <td>4.4G</td> </tr> <tr> <td>Frequency</td> <td>20Hz ~ 200Hz (sweep time: 3 minutes or less)</td> </tr> <tr> <td>Vibration time</td> <td>40 hours for X, Y, Z each</td> </tr> <tr> <td>Connector attaching method</td> <td>Test mode A, B, C</td> </tr> </tbody> </table> | | Division | Condition | Ambient temperature/humidity | Refer to figure 4-8, 90~95% | Applied current | Basic current (Connector electrodes in series.) | Current application cycle | 120 CYCLE (45 minutes-ON, 15 minutes-OFF) | Vibration acceleration | 4.4G | Frequency | 20Hz ~ 200Hz (sweep time: 3 minutes or less) | Vibration time | 40 hours for X, Y, Z each | Connector attaching method | Test mode A, B, C |
| Division | Condition | | | | | | | | | | | | | | | | | | |
| Ambient temperature/humidity | Refer to figure 4-8, 90~95% | | | | | | | | | | | | | | | | | | |
| Applied current | Basic current (Connector electrodes in series.) | | | | | | | | | | | | | | | | | | |
| Current application cycle | 120 CYCLE (45 minutes-ON, 15 minutes-OFF) | | | | | | | | | | | | | | | | | | |
| Vibration acceleration | 4.4G | | | | | | | | | | | | | | | | | | |
| Frequency | 20Hz ~ 200Hz (sweep time: 3 minutes or less) | | | | | | | | | | | | | | | | | | |
| Vibration time | 40 hours for X, Y, Z each | | | | | | | | | | | | | | | | | | |
| Connector attaching method | Test mode A, B, C | | | | | | | | | | | | | | | | | | |

3.4. Applied Part No List

| TE Part no | Description |
|------------------------|---|
| 936497-1/2/3/4/5/6/7/8 | 16POS CAP HOUSING ASS'Y 040 III MLC CONN |
| 936471-1/2/3/4/5/6/7/8 | 16POS PLUG HOUSING ASS'Y 040 III MLC CONN |
| 936500-1/2/3/4/5/6/7/8 | 20POS CAP HOUSING ASS'Y 040 III MLC CONN |
| 936473-1/2/3/4/5/6/7/8 | 20POS PLUG HOUSING ASS'Y 040 III MLC CONN |
| 936475-1/2/3/4/5/6/7/8 | 24POS PLUG HOUSING ASS'Y 040 III MLC CONN |
| 936503-1/2/3/4/5/6/7/8 | 24POS CAP HOUSING ASS'Y 040 III MLC CONN |