

**CONNECTOR PRODUCTS
 DIVISION**

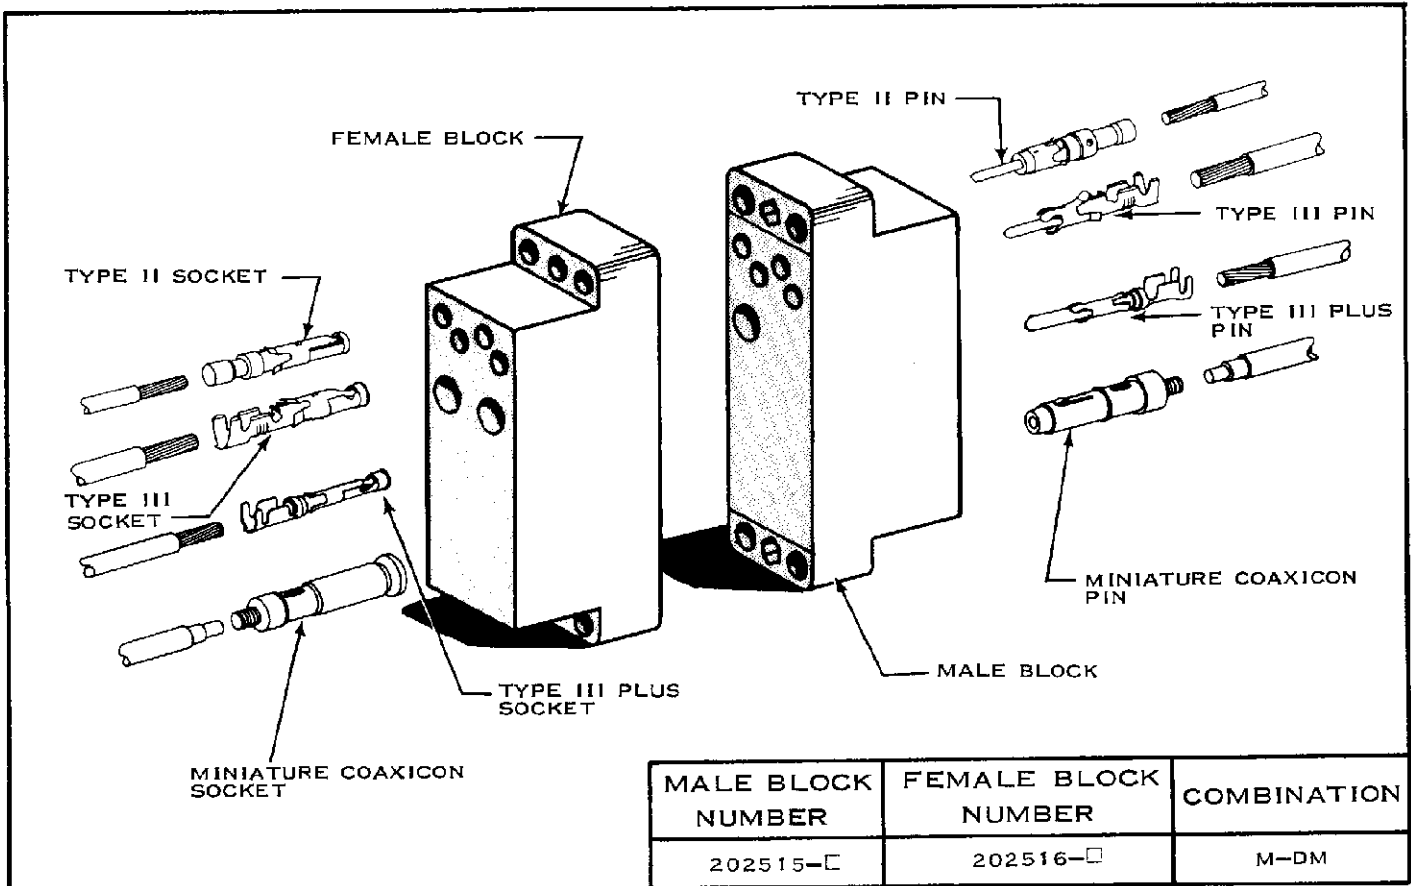


Fig. 1

1. These instructions cover the A-MP 42 Position Series "M" Connectors shown in Figure 1. Read them carefully before assembling the Connector.

2. CONTACT SELECTION

- (a) Select proper A-MP Miniature COAXICON* Contacts for use in these Connectors from AMP Instruction Sheet No. 1770.
- (b) Select A-MP Type II, III or III Plus Contacts for use in these Connectors from AMP Instruction Sheet No. 1379.

3. CONTACT CRIMPING

- (a) Crimp A-MP Miniature COAXICON Contacts according to AMP Instruction Sheet No. 1770.

- (b) Crimp A-MP Type II, III and III Plus Contacts using the Tools and instructions referenced on AMP Instruction Sheet No. 1379.

4. CONTACT INSERTION

- (a) Push Contact all the way into Connector Block. See Figure 1.
- (b) Pull back lightly on Wire to make sure Contact is properly inserted.

NOTE: When inserting Contacts crimped to small, flexible Wire, use AMP Insertion Tool No. 91002.

© Copyright 1964 by AMP Incorporated. All international rights reserved. A-MP® U. S. A. and foreign. A-MP® products covered by U. S. and foreign patents and/or patents pending.

*Trademark of AMP Incorporated

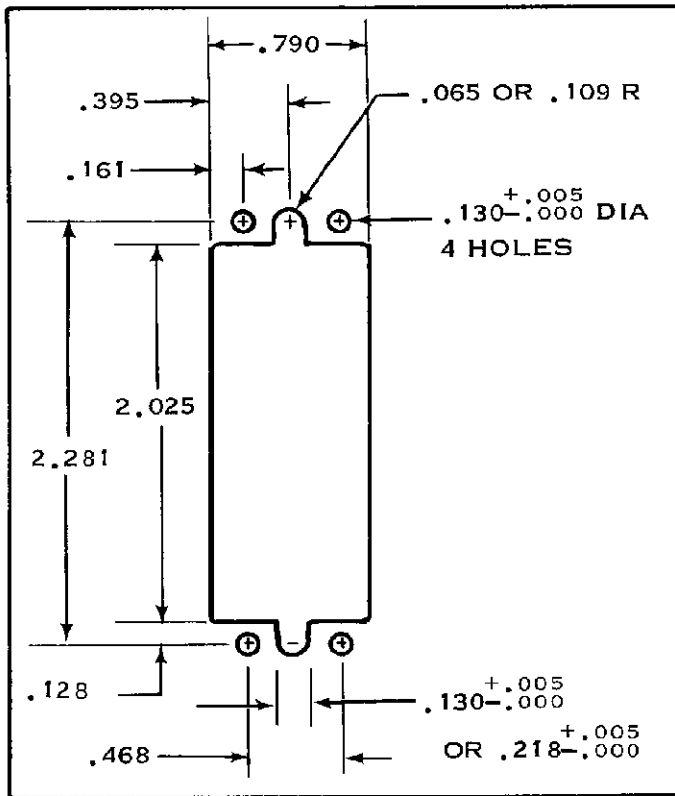


Fig. 2

5. CONTACT EXTRACTION

- Extract A-MP Miniature COAXICON Contacts according to AMP Instruction Sheet No. 1770.
- Remove A-MP Type II, III and III Plus Contacts using A-MP Extraction Tool No. 305183. See AMP Instruction Sheet No. 1216.

6. PANEL MOUNTING

- Make a cutout in the Panel using the Panel Cutout Dimensions in Figure 2.
- Mount the Connector Block to the Panel using A-MP Series "M" Guide Pins and Sockets (see AMP Instruction Sheets No. 7054 or 7055) or 4-40 Screws.

NOTE: The AMP Instruction Sheets referenced above are packaged with A-MP Tools, Connectors and Accessories.