
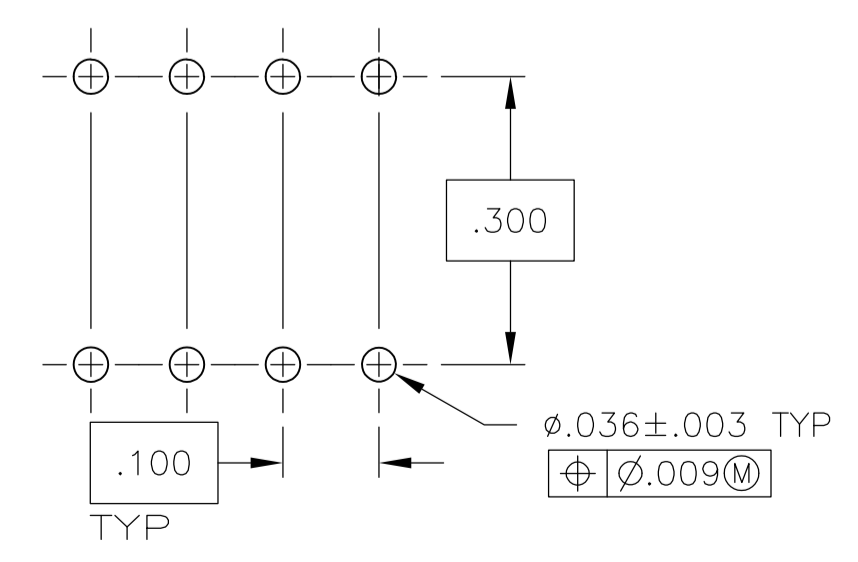
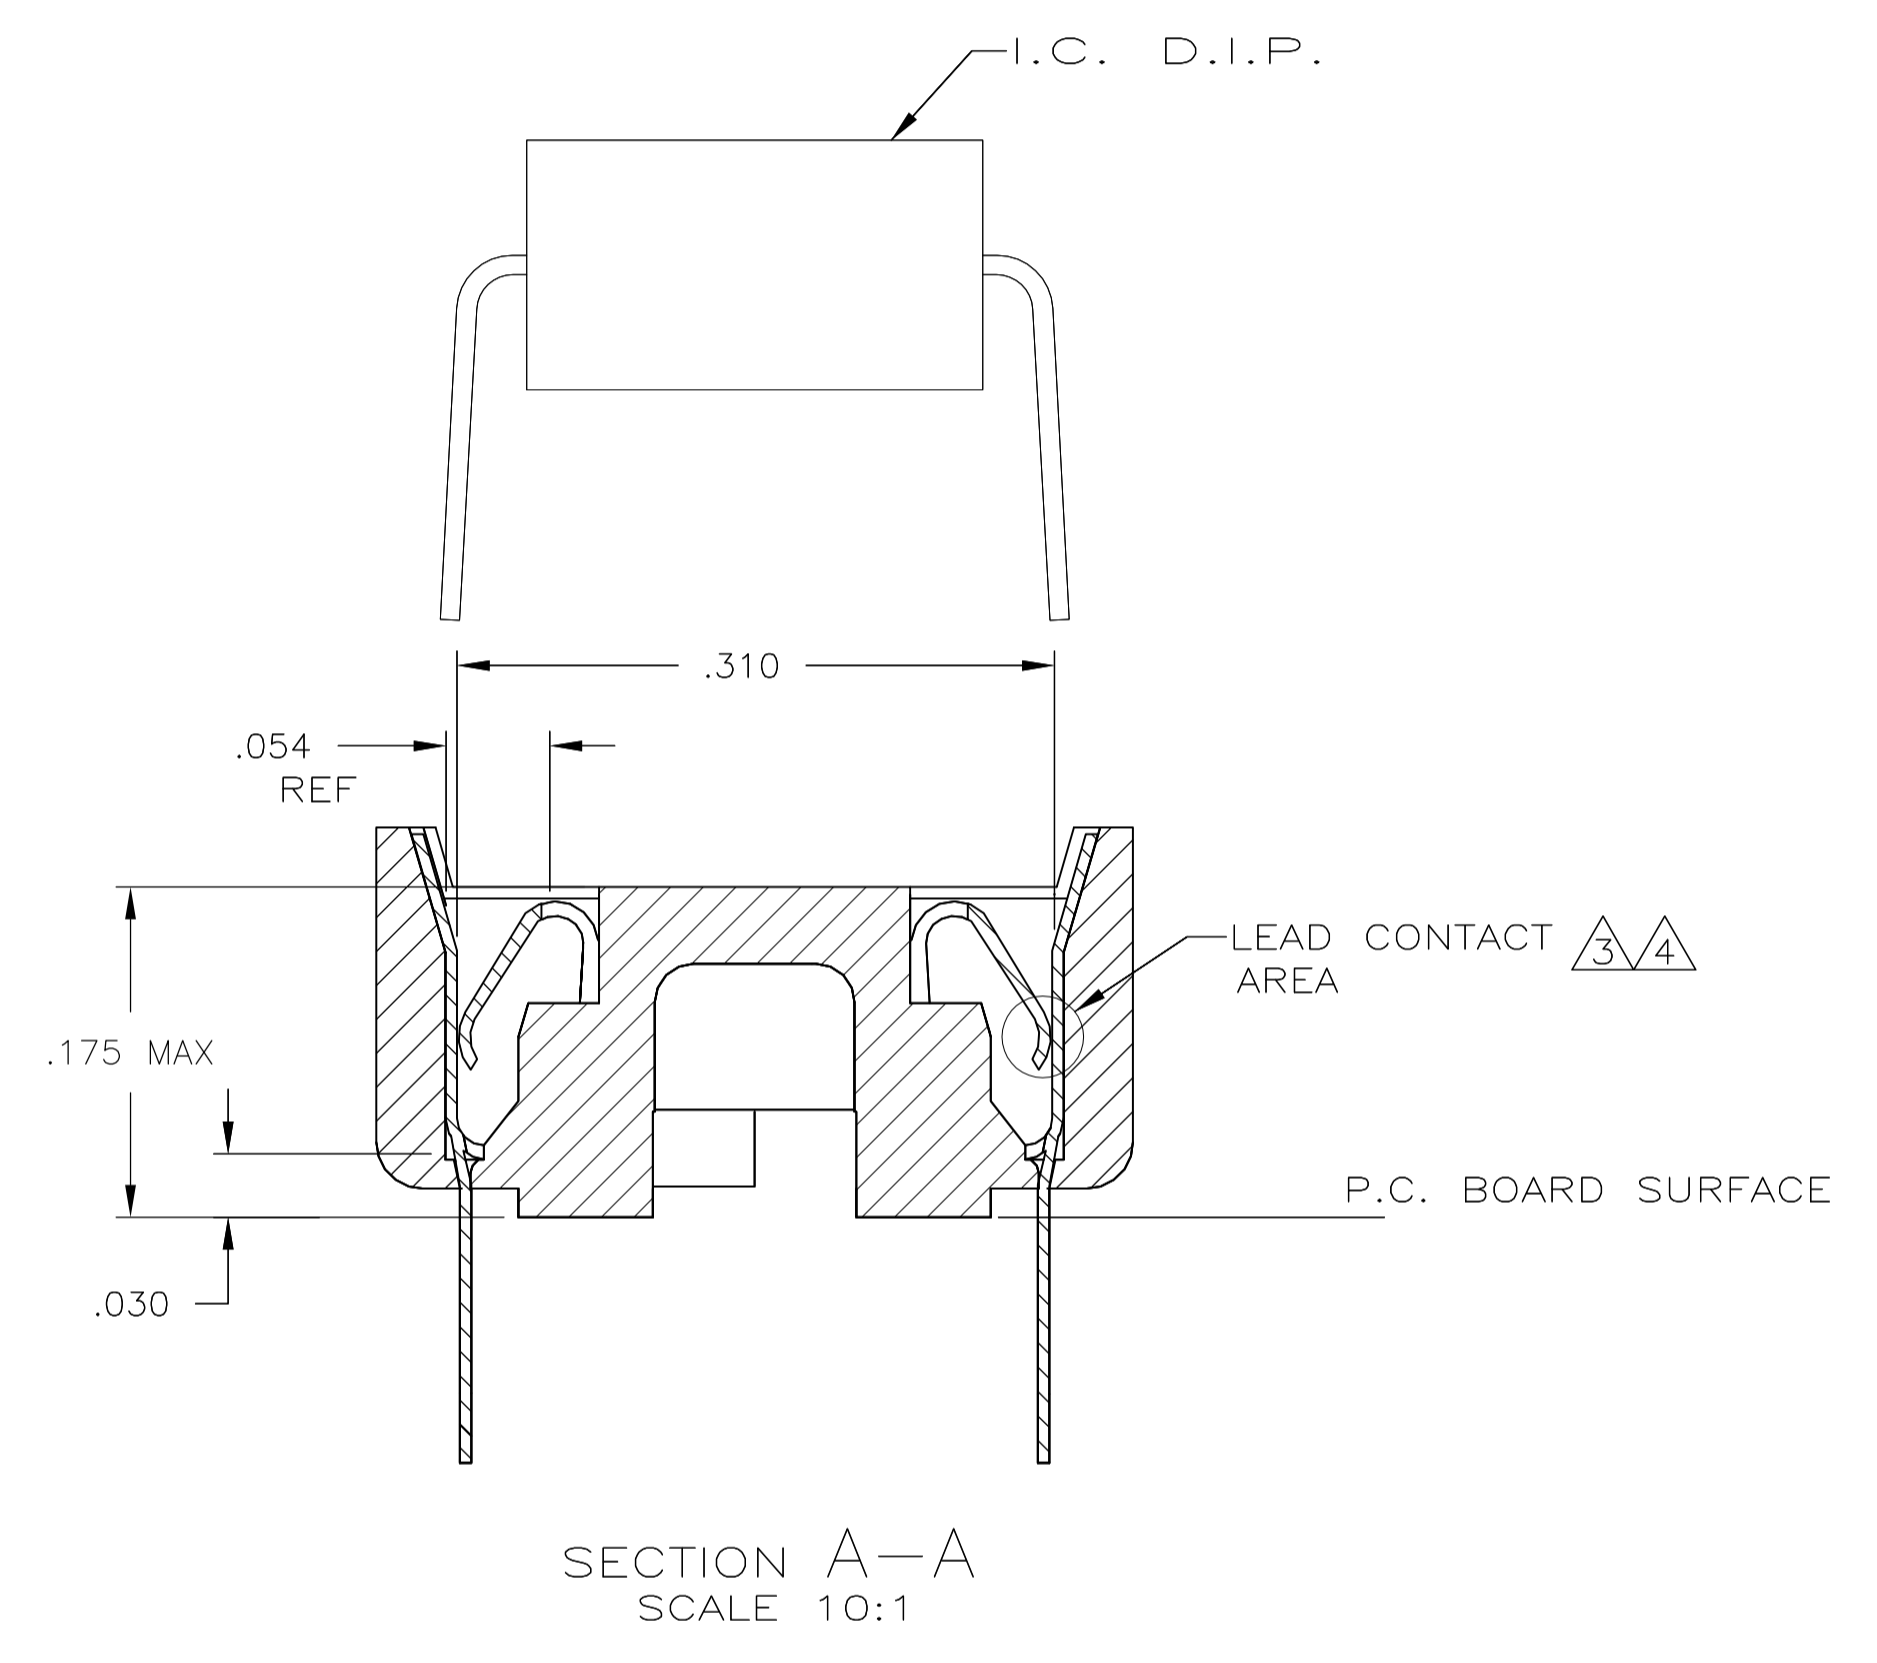
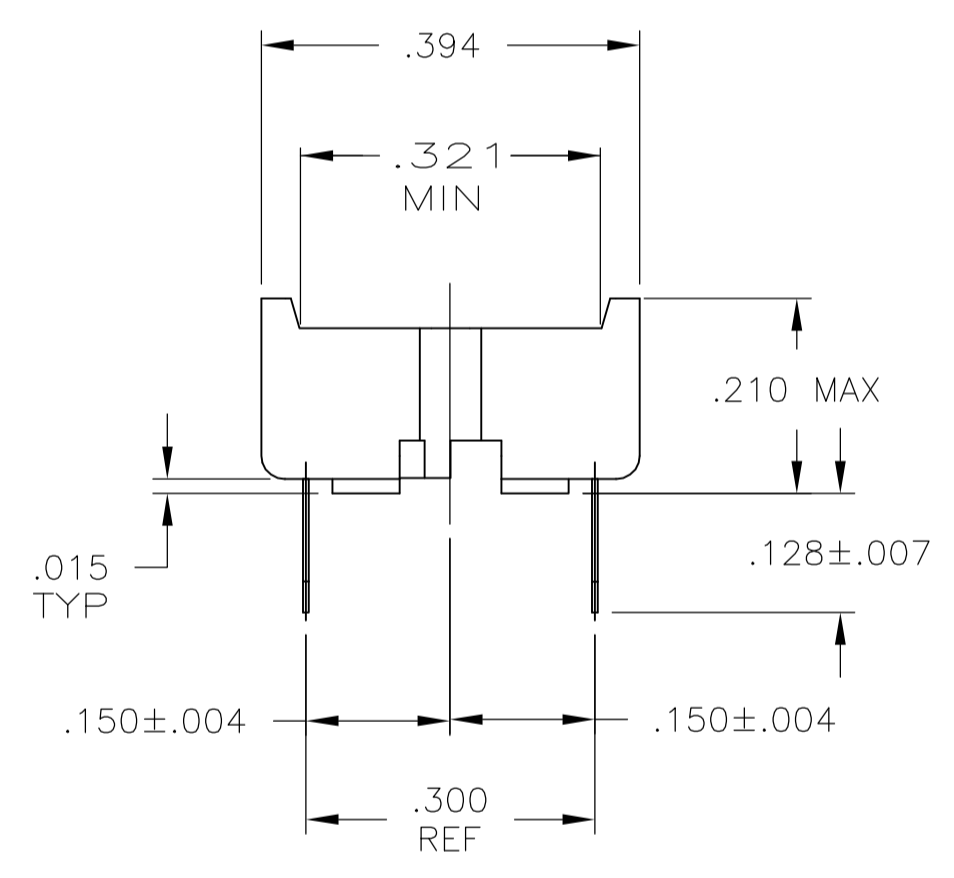
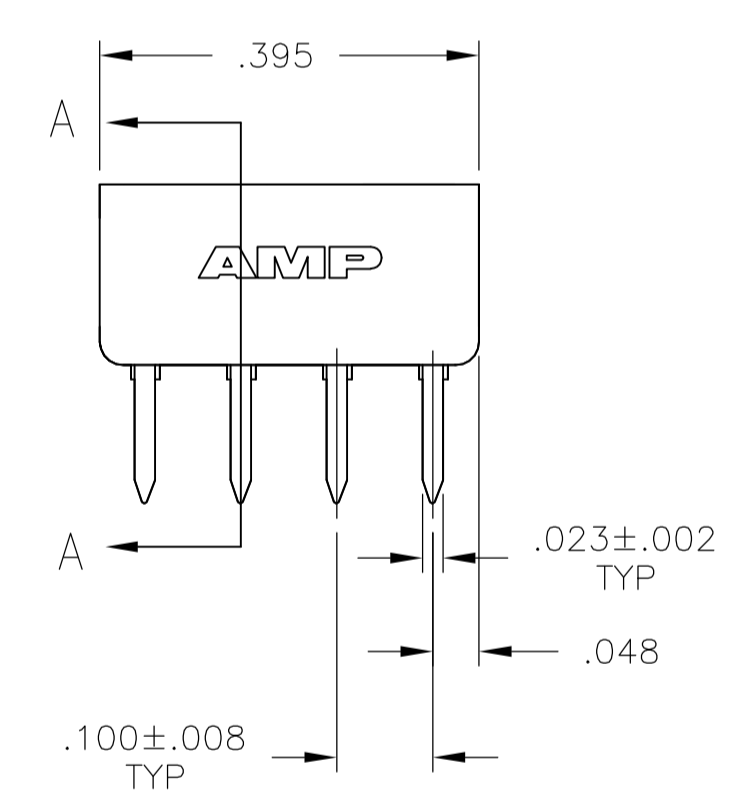


LOC		DIST		REVISIONS			
AD	0	REV	DATE	BY	CHK	APPV	
AE1	REVISED PER ECO-11-004820		11MAR11	RK	HMR		

- RECEPTACLE ACCEPTS A .008-.014 THICK I.C. LEAD.
- TUBE LOADED FOR AUTOMATIC INSERTION.
- TWO .000030 MIN THK. GOLD STRIPES IN CONTACT AREA WITH TIN-LEAD (93/7) ON CONTACT LEGS, BALANCE OF CONTACT NICKEL PLATED.
- TWO .000015 MIN THK. GOLD STRIPES IN CONTACT AREA WITH TIN-LEAD (93/7) ON CONTACT LEGS, BALANCE OF CONTACT NICKEL PLATED.

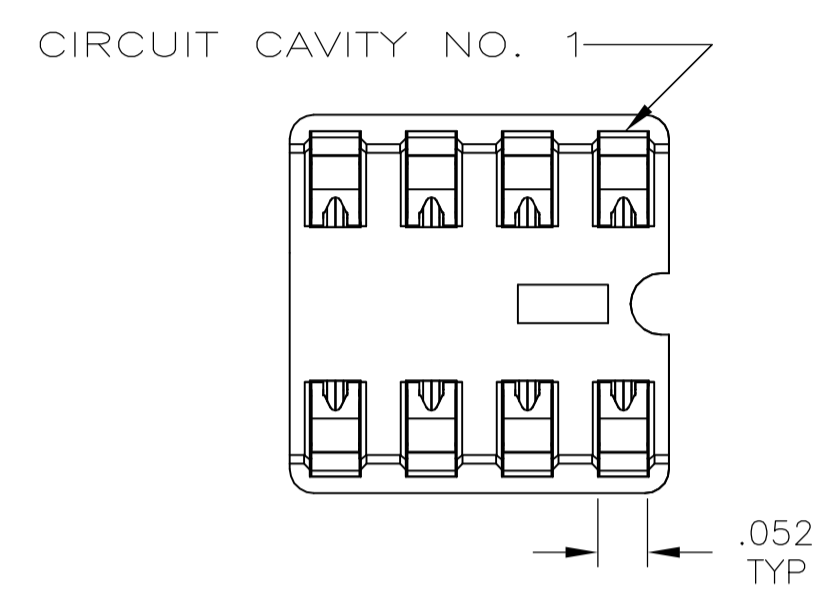

RECOMMENDED MOUNTING HOLE PATTERN
SCALE 4:1

REVISION	DATE	DESCRIPTION	BY	CHK	APPV	
1	2-20-87	OBSELETE	TINNED	PHOS.BRZ. .006 THK	GLASS-FILLED THERMOPLASTIC, 94V-O, BLACK	2-640463-5
2	2-20-87	SUPERSEDED BY 390261-2	4	PHOS.BRZ. .006 THK	GLASS-FILLED THERMOPLASTIC, 94V-O, BLACK	2-640463-4
3	2-20-87	SUPERSEDED BY 390261-2	TINNED	PHOS.BRZ. .006 THK	GLASS-FILLED THERMOPLASTIC, 94V-O, BLACK	2-640463-3
4	2-20-87	SUPERSEDED BY 390261-2	4	BE.CU. .006 THK	GLASS-FILLED THERMOPLASTIC, 94V-O, BLACK	2-640463-2
5	2-20-87	SUPERSEDED BY 390261-2	TINNED	BE.CU. .006 THK	GLASS-FILLED THERMOPLASTIC, 94V-O, BLACK	2-640463-1

THIS DRAWING IS A CONTROLLED DOCUMENT.		DIN	2-20-87
DIMENSIONS: INCHES		CHK	M. CYRUS
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APPV	R. MILLER
0. PLC	± .005	NAME	J. LAMBERT
1. PLC	± .005	PRODUCT SPEC	108-1066
2. PLC	± .005	APPLICATION SPEC	114-1049
3. PLC	± .005	WEIGHT	—
4. PLC	± .005	CUSTOMER DRAWING	—
ANGLES	± .005	SCALE	5:1

STE TE Connectivity
SOCKET ASSY, DIR, 8 PGS, DIPLOMATE DL
NOT the LATEST REVISION

4805 (3/11)