

1. The tool (see Fig.1) covered by this Instruction Sheet, crimps the applicable terminals listed in the table (Fig.2) below. These terminals can accept the stranded wires of the listed range. Use these terminals only, purchased as "Loose Piece Form" from Tyco Electronics AMP K.K. Read this Instruction Sheet carefully before you crimp terminals.

2. CRIMP SECTION:

This tool has two crimping sections.
To select proper crimping section:

- (a). Check your wire size and terminal numbers you are going to crimp, and see if they are applicable each other.
- (b). Match the crimp symbols in Fig.2 for the wire size you have chosen. These symbols must correspond with the markings stamped on the tool head. Mismatched application will result improper and unstable termination.

3. WIRE STRIPPING:

Strip the wire end in length shown in Fig. 2. Do not cut, nick or damage the strands when stripping.

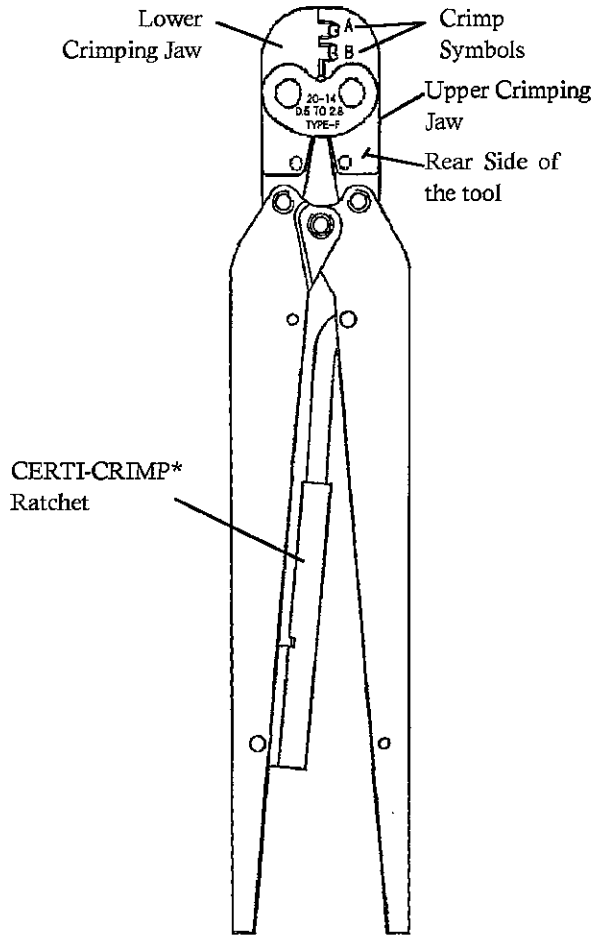


Fig.1

DO NOT USE STRIP TERMINAL

PART NUMBER	NEST SYMBOL	□ TERMINAL STRIP NO.	TERMINAL L.P. NO.	WIRE RANGE AWG (mm ²)	INSUL RANGE (mm)	STRIP LENGTH (mm)
2088544-1	A	(170003)	170021	20-18 [0.5-0.89]	2.2-3.1	4.2-5.2
		(170012-2)	170021-1	18-16 [0.75-1.42]		
	B	(170003)	170021	14 [2.0-2.27]		
		(170002)	170020	16 [1.25-1.42]		
		(170002)	170020	20-18 [0.5-0.89]		
		(170003)	170021	16 [1.25-1.42]		

Fig.2

4. CRIMPING PROCEDURE:

- (a). This tool having CERTI-CRIMP* Ratchet can assure you constant and reliable wire crimping. To open handles, close them and squeeze until the ratchet releases. Note that once the ratchet is engaged, the handles can not be opened until they are fully closed.

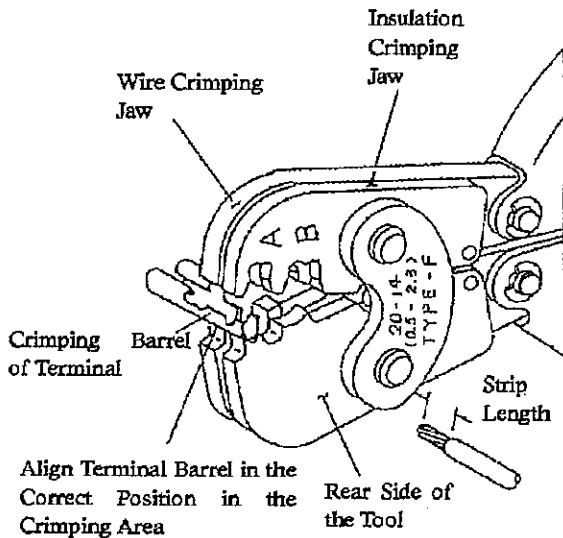


Fig.3

- (b). Insert the terminal into the crimping area as shown in Fig.3. Cautions must be taken care that the wire barrel and insulation barrel of the terminal area placed on the right position and direction in the area respectively.
- (c). Squeeze handles to close jaws to retain terminals.
DO NOT DEFORM TERMINAL WIRE BARREL AND INSULATION BARREL.
- (d). Insert stripped wire end into the barrels just enough to be located in the right position.
- (e). Hold wire in place and finish crimping by closing handles as far as they go, until CERTI-CRIMP Ratchet releases.
- (f). Open tool handles and remove the crimped terminal from the tool.

5. MAINTENANCE

Lubricate all pins, pivot points and bearing surfaces of the tool with motor oil of good quality. (SAE #20 or equivalent may be recommended.) Brush or wipe dirt off from the crimping surfaces and oil to prevent them from stains. Ask AMP field engineers to calibrate handle pressure and crimp heights of the jaws after long period of use in order to maintain the tool in good condition for correct crimping.

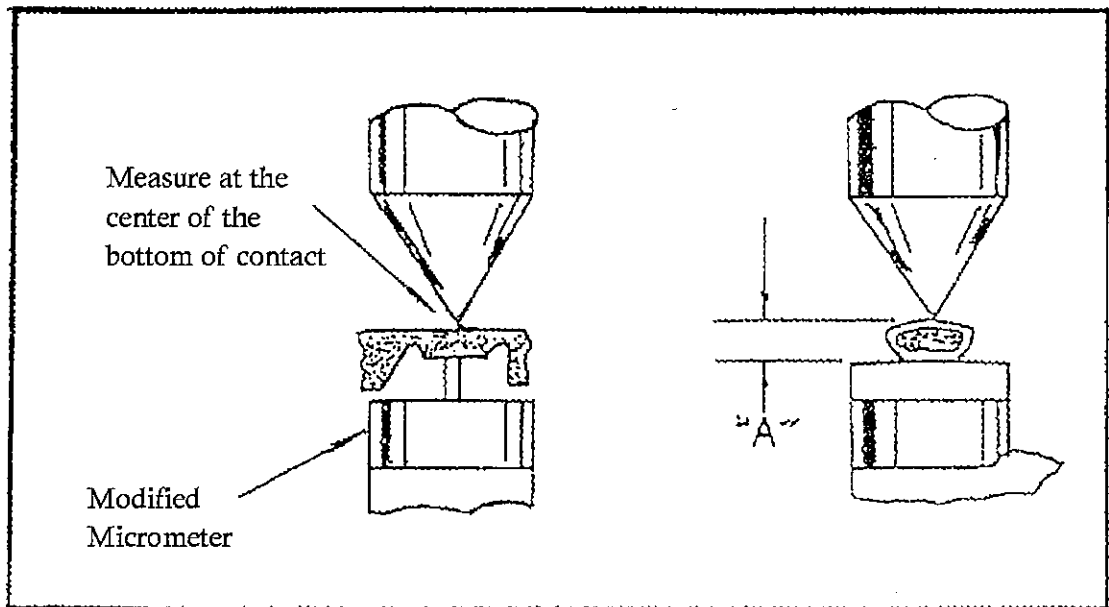


Fig.4

PART NUMBER	NEST SYMBOL	□ TERMINAL STRIP NO.	TERMINAL L.P. NO.	WIRE RANGE AWG (mm ²)	TERMINAL CRIMP HEIGHT (mm)
2088544-1	A	(170003)	170021	20-18 [0.5-0.89]	1.12-1.40
		(170012-2)	170021-1	18-16 [0.75-1.42]	1.12-1.28
	B	(170003)	170021	14 [2.0-2.27]	1.45-1.84
		(170002)	170020	16 [1.25-1.42]	
		(170002)	170020	20-18 [0.5-0.89]	1.45-1.72
		(170003)	170021	16 [1.25-1.42]	

Fig.5