



LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	NEW RELEASE	04OCT2016	JA	DM
	A1	REVISED PER PCN E-19-009112	10JUN2019	JA	IG
	A2	REVISED PER PCN-23-181233	06JUL2023	RK	IG

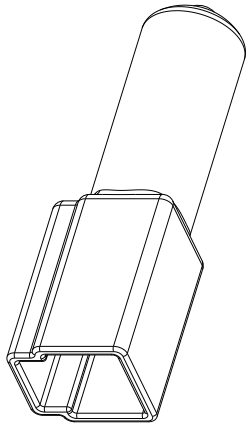

SCALE 1:1

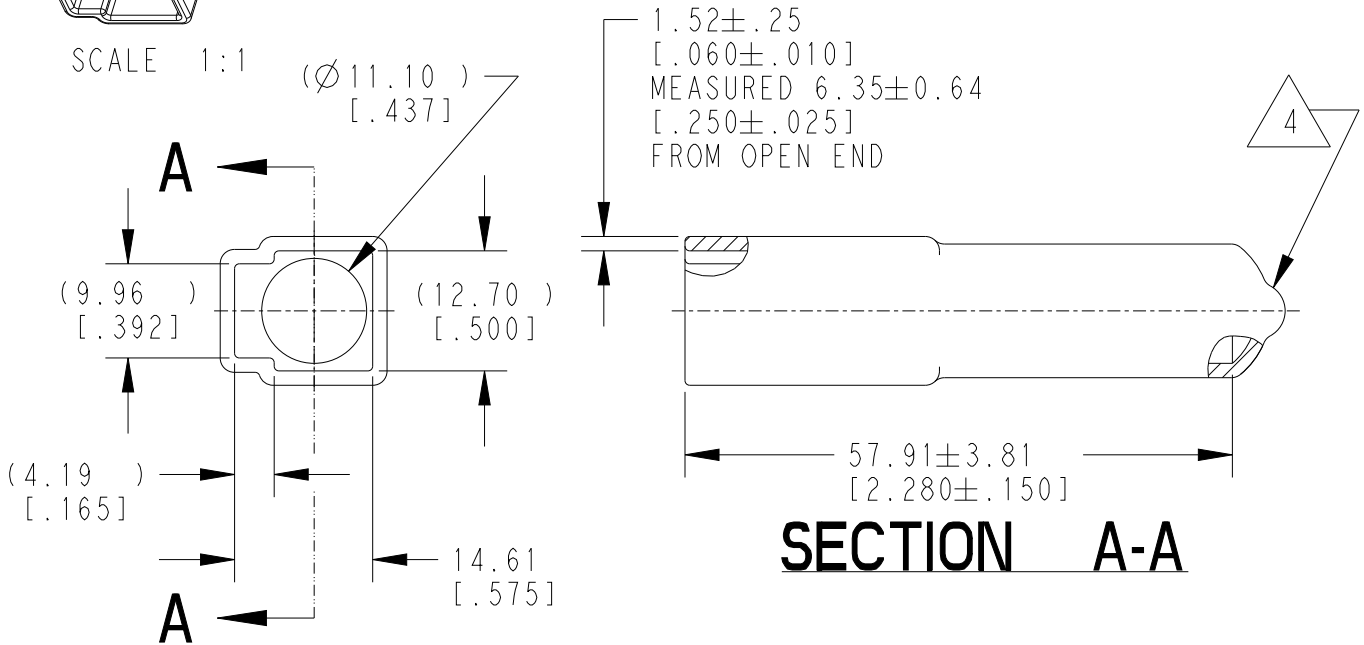

SECTION A-A

- 4 SMALL MATERIAL EXTENSION IS ACCEPTABLE ON THIS END ALL AROUND.
3. THIS ACCESSORY PART IS PROVIDED WITHOUT TYPICAL TRANSPORTATION INDUSTRY PROCESS CONTROLS. NO VALIDATION TESTING HAS BEEN PERFORMED. CUSTOMER IS RESPONSIBLE FOR DETERMINING PRODUCT PERFORMANCE AND SUITABILITY FOR APPLICATION
 2. TEMPERATURE RATING: -29°C TO +100°C [-20°F TO +212°F]
 1. THIS PART IS USED ON DT06-2S PLUG WITH ANY MODIFICATION THAT DOES NOT INCLUDE AN END CAP.

NOTES:

TE INTERNAL PN	DEUTSCH PN
DT2S-BT-BK	DT2S-BT-BK

2019 RELEASED FOR PUBLICATION ALL RIGHTS RESERVED. BY TE CONNECTIVITY. THIS DRAWING IS UNPUBLISHED. COPYRIGHT 2016

DIMENSIONS: MM [INCHES]	DWN J.APOSTOL	04OCT2016	MATERIAL	PVC	FINISH	BLACK
	CHK D.MEYER	04OCT2016	TE Connectivity			
TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD D.MEYER	04OCT2016				
0 PLC ±	PRODUCT SPEC		SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
1 PLC ±	APPLICATION SPEC		A 4	4AFU8	©-DT2S-BT-BK	-
2 PLC ±		114-151009				
3 PLC ±	WEIGHT	4.57 g				
4 PLC ±	CUSTOMER DRAWING		SCALE	5:4	SHEET	1 OF 1
ANGLES ±					REV	A2