

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	E	See ECO-19-004147	3/22/19	J.B	T.L

QS1500
Polyolefin, Flexible,
Adhesive Lined,
Heat - Shrinkable Tubing

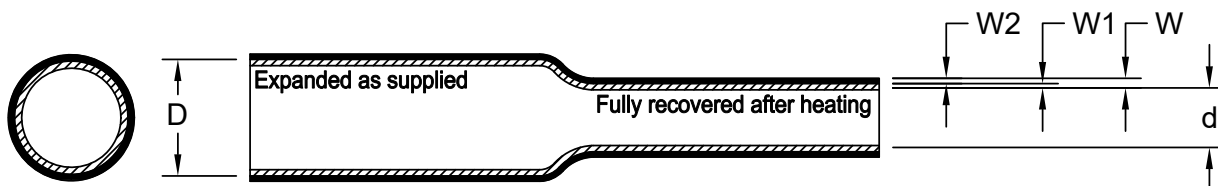


Table 1: Dimensions mm (inches)

Size	As Supplied		As Recovered							
	Minimum Expanded I.D. Including Core (D)		Maximum Recovered I.D. Including Core (d)		Minimum Recovered Jacket Wall (W2)		Nominal Recovered Adhesive Wall (W1)		Nominal Recovered Total Wall (W)	
	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.
No. 1	5.72	0.225	1.27	0.050	0.64	0.025	0.56	0.022	1.20	0.047
No. 2	7.62	0.300	1.65	0.065	0.76	0.030	0.76	0.030	1.52	0.060
No. 3	11.55	0.455	2.41	0.095	0.89	0.035	1.02	0.040	1.91	0.075
No. 4	17.78	0.700	4.45	0.175	1.04	0.041	1.37	0.054	2.41	0.095
No. 5	27.94	1.100	7.62	0.300	1.93	0.076	1.57	0.062	3.51	0.138

Material: Fabricated from flame-retarded crosslinked modified flexible polyolefin, with a thermoplastic adhesive liner.

Color: Jacket color is black or red. Adhesive liner shall be amber.

Reference Specification TEC-108-120016

RELEASED FOR PUBLICATION

ALL RIGHTS RESERVED.

THIS DRAWING IS UNPUBLISHED.

© COPYRIGHT 2019 TE Connectivity

DIMENSIONS:	DWN	12MAR2019	MATERIAL	FINISH
INCHES	J. Bitter		-	-
TOLERANCES UNLESS OTHERWISE SPECIFIED:	CHK	-	TE Connectivity Ltd.	
	Tim Licko	-		
	APVD	-		
	Tim Licko	-		
0 PLC ± -	PRODUCT SPEC	-	NAME	
1 PLC ± -	-	-	QS1500	
2 PLC ± -	APPLICATION SPEC	-	Polyolefin, flexible, Adhesive Lined,	
3 PLC ± -	-	-	Heat - shrinkable Tubing	
4 PLC ± -	WEIGHT	-	SIZE	RESTRICTED TO
ANGLES ± -	-	-	A4	-
	CUSTOMER DRAWING	SCALE	CAGE CODE	REV
		None	06090	E
		SHEET	DRAWING NO	
		1 OF 1	QS1500	