

## E2-SERIES INCLINOMETER

### SPECIFICATIONS

- Dual axis inclinometer
- Measurement range  $\pm 5^\circ$ ,  $\pm 10^\circ$ ,  $\pm 15^\circ$  or  $\pm 45^\circ$
- Analogue voltage output signal
- OEM module

### FEATURES

- High resolution
- Analogue voltage output signal
- Easy for mounting
- PCB level
- Fast response time
- Low drift sensitivity
- Low noise level

### APPLICATIONS

- Road construction machines
- Vehicle applications
- Building control
- Mobile and stationary cranes
- Hydraulic leveling
- Platform leveling
- Drilling machines

The **E2- series** is a biaxial inclination sensor as a pcb module for OEM use with measurement range  $\pm 5^\circ$ ,  $\pm 10^\circ$ ,  $\pm 15^\circ$  or  $\pm 45^\circ$ . It consist of two basic inclination sensor cells based on a conductance measurement principle and their complete electronic biasing and readout, which is carefully designed in order to minimize drift and temperature effects.

### PERFORMANCE SPECIFICATIONS

	Conditions	Min	Type	Max	Unit
Measurement range (1)		-5 , -10, -15, -45		+5, +10, +15, +45	°
Resolution (2)		0.001		0.01	°
Accuracy (3)	Ta = 0°...70°C,	0.08 , 0.11 , 0.15 , 0.9			°
Non-linearity		1.5			%[FS]
Cross sensitivity		0.15			%[FS]
Voltage output signal(4)	5°,15° unit	-2		+2	V
Voltage output signal(4)	5°,15° unit	0.5		4.5	V
Voltage output signal(4)	10°,45° unit	-2.2		+2.2	V
Voltage output signal(4)	10°, 45° unit	0.3		4.7	V
Current consumption		9			mA
Power supply		+12		+24	VDC
Operation temperature range		0		+70	°C
Storage temperature range		-40		+85	°C
Weight		20			g
Dimensions (5)	W x D x H	45 x 45 x 14(20)			mm

(1) Measurement ranges +/-5°, +/-10°, +/-15°, +/-45° available

(2),(3) Depend on measurement range

(4) Depending on the circuitry wiring, see pinning schema

(5) Dimensions 45 x 45 x 20 mm , valid for the NS-45/E2




### PINNING


Pin	Name	Description	Type
1	Vcc	Positive power supply +12...+24VDC	Supply, Input
2	Vref	Reference potential +2.5VDC, S-GND <sup>(1)</sup>	Supply, Input
3	GND	Ground, negative supply voltage <sup>(2)</sup>	Supply, Input
4	Out X	Output voltage signal X axis	Output
5	Out Y	Output voltage signal Y axis	Output
6	n.c.	n.c.	-

(1) If output signal will be used of +/-2 V (unit: 5°,15°) alternatively +/-2.2 V (unit: 10°,45°)


(2) If output signal will be used of 0.5...4.5 V (unit: 5°,15°) alternatively 0.3...4.7 V (unit: 10°,45°)

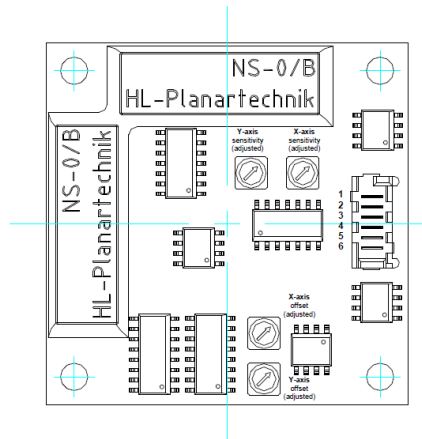

#### Pinning Vout x,y in reference to Vref.: +2.5VDC

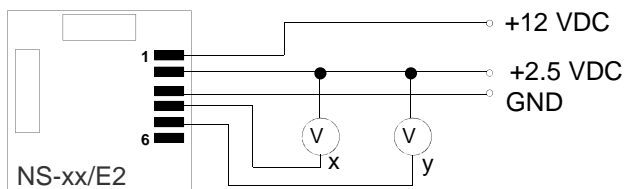


#### Pinning Vout x,y in reference to GND

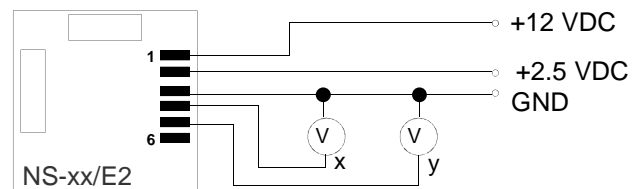

**All connecting configurations need the Vref: +2.5 VDC power supply signal.**

### MOUNTING

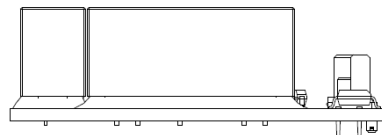

This kind of unit is for horizontal mounting suitable only.

### ORDERING INFORMATION

PART NUMBERING	UNIT	SHORT DESCRIPTION
G-NSE2-003	NS- 5/E2	dual axis, +/- 5° angle, Vcc: +12...24VDC, output V
G-NSE2-004	NS-10/E2	dual axis, +/-10° angle, Vcc: +12...24VDC, output V
G-NSE2-010	NS-15/E2	dual axis, +/-15° angle, Vcc: +12...24VDC, output V
G-NSE2-020	NS-45/E2	dual axis, +/-45° angle, Vcc: +12...24VDC, output V
G-NSMIS-014	Connector, cable	6- pin Molex-Connector with 20cm ribbon cable

#### NORTH AMERICA

TE Connectivity Sensors, Inc.  
1000 Lucas Way  
Hampton, VA 23666  
United States  
Phone: +1-800-745-8008  
Fax: +1-757-766-4297  
Email: [customer care.hmpt@te.com](mailto:customer care.hmpt@te.com)  
Web: [www.te.com](http://www.te.com)

#### EUROPE

TE Connectivity Sensors  
Germany GmbH  
Hauert 13  
D-44227 Dortmund  
Germany  
Phone: +49-(0)231-9740-0  
Fax: +49-(0)231-9740-200  
Email: [customer care.dtmtd@te.com](mailto:customer care.dtmtd@te.com)  
Web: [www.te.com](http://www.te.com)

#### ASIA

TE Connectivity Sensors China Ltd.  
No. 26, Langshan Road  
High-tech Park (North)  
Nanshan District, Shenzhen 518057  
China  
Phone: +86-755-33305088  
Fax: +86-755-33305099  
Email: [customer care.shzn@te.com](mailto:customer care.shzn@te.com)

#### [www.te.com](http://www.te.com)

TE Connectivity, TE Connectivity (logo) and EVERY CONNECTION COUNTS are trademarks. All other logos, products and/or company names referred to herein might be trademarks of their respective owners.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

© 2017 TE Connectivity Ltd. family of companies All Rights Reserved.