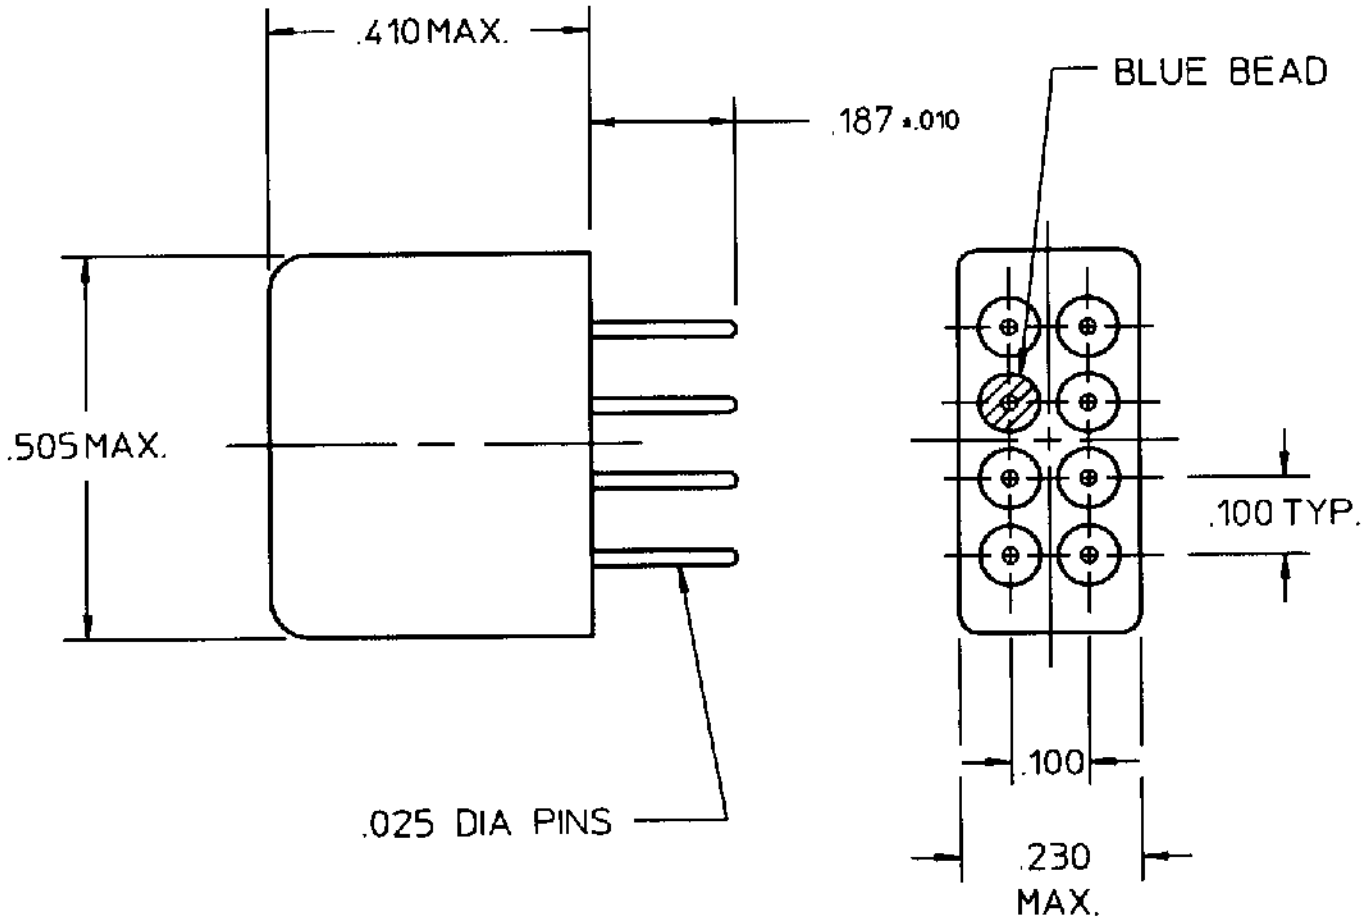

COIL:

RESISTANCE 1500 OHMS ± 10%

NOMINAL VOLTAGE 26.5 VDC

MUST OPERATE 13.5 VDC

MUST RELEASE 1.5 VDC

ENVIRONMENT:

VIBRATION 10 CPS TO 2000 CPS @ 20 g's

SHOCK 100 g's 6 ± 1 MS. DURATION

TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE & RELEASE TIME 4 MS MAX.
CONTACT BOUNCE 2 MS MAX.

CUSTOMER DATA SHEET

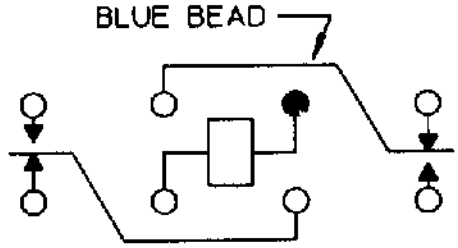

CONTACT RATING: LOW LEVEL TO 1 AMP 28 VDC RESISTIVE 100,000 OPERATIONS

DR. R.B. 1/21/93 CK. 1/22/93

COMMUNICATIONS INSTRUMENTS, INC.

CUST. C. I. I. STD.

CUST. NO.

TYPE "MFW" RELAY

MFW1201N00