




AMP INCORPORATED
HARRISBURG, PENNA.

AMP SHIELD & CABLE CLAMP
ASSEMBLIES - 180°
(Short Sides)
FOR SERIES "M" & MINIATURE
DUALATCH* CONNECTORS

IS 1312	
RELEASED	3-15-61
REVISED	10-2-63

CONNECTOR PRODUCTS
DIVISION

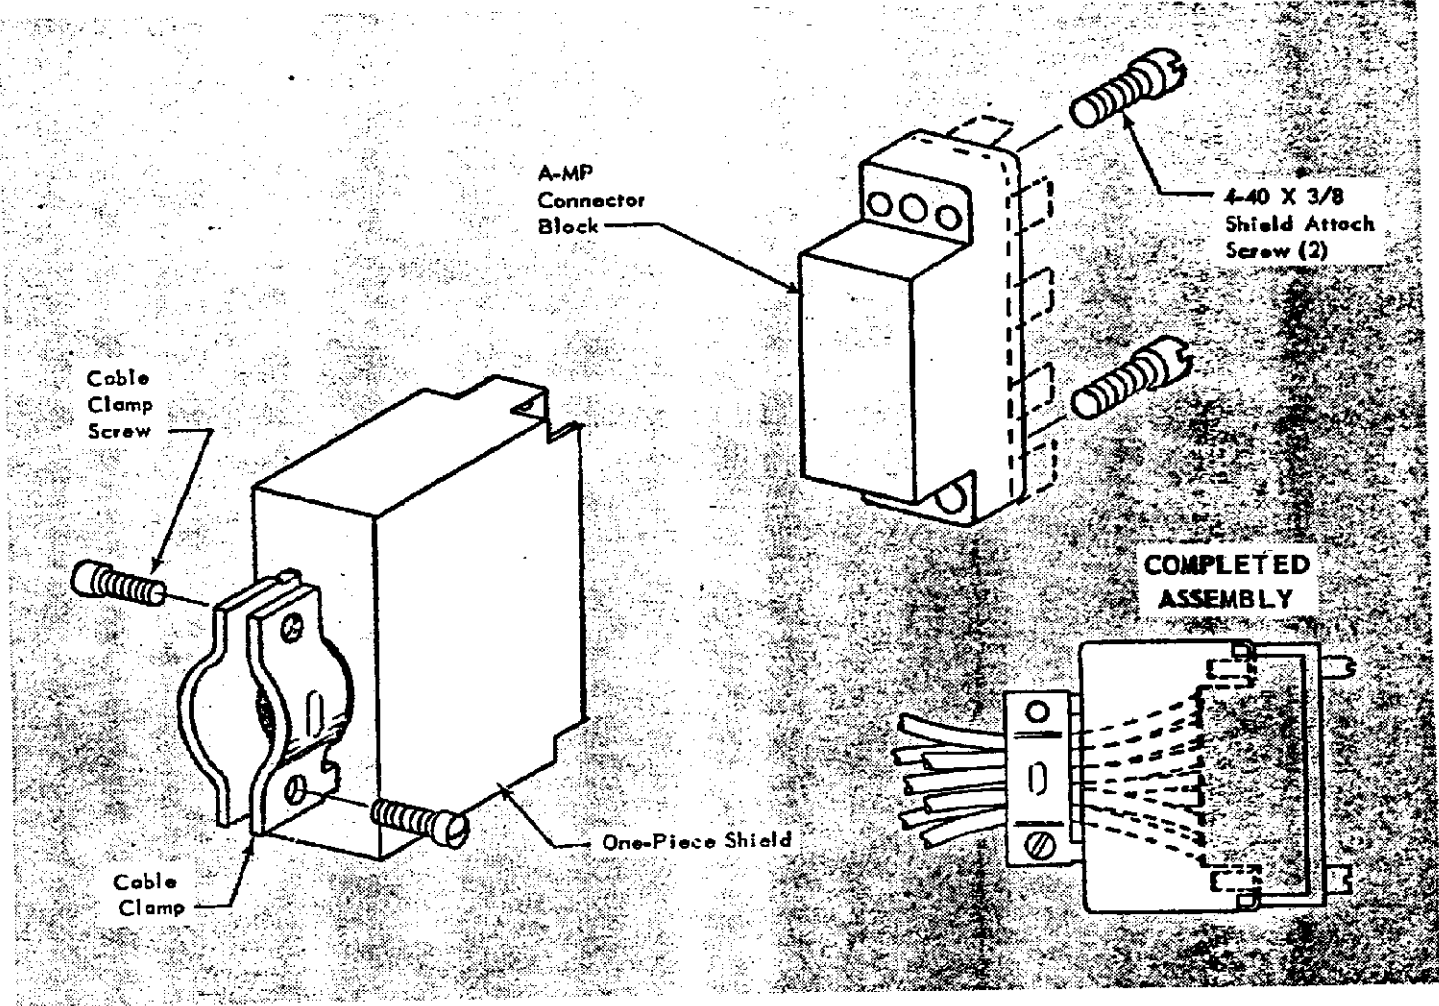

1. Attach Cable Clamp Screws. Do not tighten.
2. Pass Cable thru Cable Clamp and insert Contacts in the Connector Block. See chart for Clamp Capacity.
3. Slide Shield over Cable until Shield butts against Connector Block.
4. Attach Shield to Connector Block using:
 - (a) Two 4-40X 3/8 Shield Attach Screws.
 - (b) Series "M" Center Guide Pins or Sockets for Series "M" Blocks.
 - (c) Miniature Dualatch Center Guide Pins for Miniature Dualatch Blocks.
5. Tighten Cable Clamp Screws.

ASSEMBLY NUMBER	FOR USE ON	CLAMP CAPACITY
201165-□	34 Position Series "M" Connector	34 Wires at .070
	40 Circuit Miniature Dualatch Connector	40 Wires at .060
201169-□	26 Position Series "M" Connector	26 Wires at .070
201173-□	50 Position Series "M" Connector	50 Wires at .070
	60 Circuit Miniature Dualatch Connector	60 Wires at .055
201227-□	20 Position Series "M" Connector	20 Wires at .070
201360-□	14 Position Series "M" Connector	14 Wires at .070

©Copyright 1961, 1963 by AMP Incorporated. All international rights reserved. A-MP (TM) U.S.A. and foreign. A-MP (TM) products covered by U.S. and foreign patents and/or patents pending.