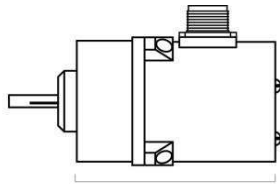


2.5" [64 mm]

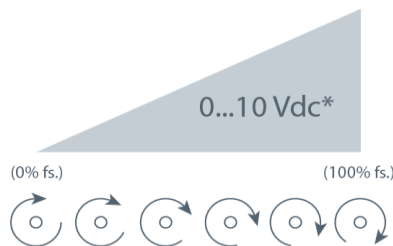


4.0" [102 mm]

The RT8510 can operate from an unregulated 14.5 to 40 V_{DC} power supply while providing a regulated output signal over its full range from 1/8 of a turn up to 200 turns. It provides a 0 - 10 V_{DC} position feedback signal proportional to the rotational position of the shaft

As a member of Celesco's innovative family of NEMA-4/ IP67 rotational transducers, the RT8510 offers numerous benefits including a zero and span adjust and a potentiometric sensor which provides an "absolute" feedback signal that is unaffected by power loss.

Output Signal



*Optional 0...5 Vdc output signal available.

RT8510

0-45° TO 0-200 TURNS • 0...5, 0...10 Vdc

Industrial Grade Rotational Position Sensor Absolute Rotary Position up to 200 turns
Aluminum or Stainless Steel Enclosure Options IP68 / NEMA 6

General

Full Stroke Range	0-0.125 to 0-200 turns
Output Signal Options	0...5, 0...10 Vdc
Accuracy	0.15% to 1.25%, see ordering information
Repeatability	± 0.05% full stroke
Resolution	essentially infinite
Enclosure Material Options	powder-painted aluminum or stainless steel
Sensor	plastic-hybrid precision potentiometer
Potentiometer Cycle Life	see ordering information
Shaft Loading	up to 10 lbs. radial and 5 lbs. axial
Starting Torque (25°C)	2.0 in-oz., max.
Weight, Aluminum (Stainless Steel) Enclosure	3 lbs. (6 lbs.) max.

Electrical

Input Voltage	14.5-40 VDC (10.5-40 VDC for 0...5 volt output)
Input Current	10 mA max.
Output Impedance	1000 ohms
Maximum Load	5000 ohms.
Zero Adjustment	from factory set zero to 50% of full stroke range
Span Adjustment	to 50% of factory set span

EMC COMPLIANCE PER DIRECTIVE 89/336/EEC

Emission/Immunity	EN50081-2/EN50082-2
--------------------------	---------------------

Environmental

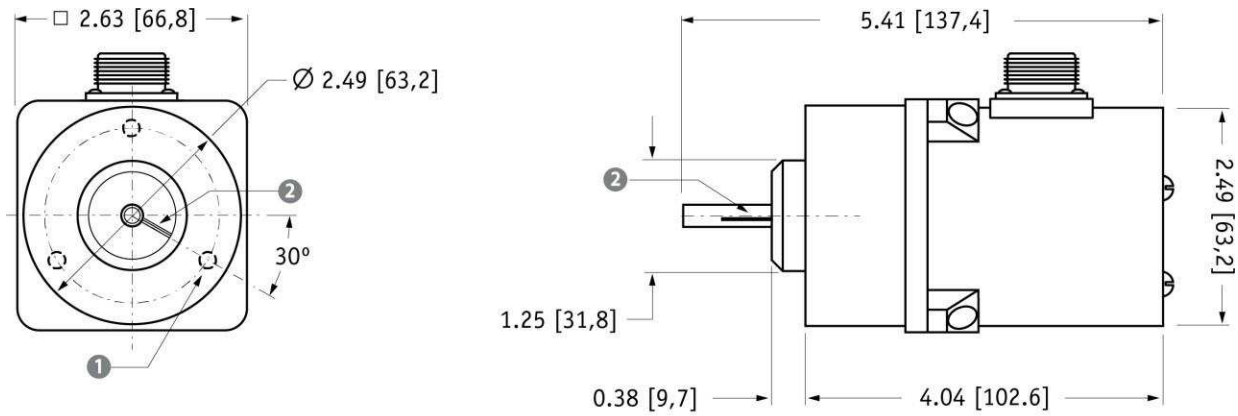
Enclosure	NEMA 4/4X/6, IP 67/68
Operating Temperature	-40° to 200°F (-40° to 90°C)
Vibration	up to 10 g to 2000 Hz maximum

CLICK HERE ›
CONNECT WITH A SPECIALIST

RT8510

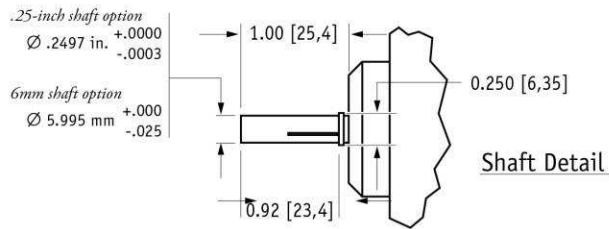
0–45° TO 0–200 TURNS • 0...5, 0...10 Vdc

Outline Drawing



- 1 mounting holes:
for .25 in. shaft option, mounting holes are threaded #10-32 x 0.375 deep 120° apart on a 2.00 inch dia. BC

for 6mm shaft option, mounting holes are threaded M6 x 9 mm deep 120° apart on a 50,8 mm dia. BC
- 2 reference mark:
full counter-clockwise position - align mark on shaft to mark on face for start of measurement range



DIMENSIONS ARE IN INCHES [MM]
tolerances are ± 0.02 in. [$\pm 0,5$ mm] unless otherwise noted

Ordering information

Model Number:

RT8510- **1** **0**

order code: R A B C D E F G

Sample Model Number:

RT8510 - 0005 - 111 - 1110

- R range: 5 turns (clockwise shaft rotations)
- A enclosure: aluminum
- B shaft diameter: .25 inches
- C mounting style: face mount
- E output signal: 0...10 VDC signal increasing clockwise
- F electrical connection: 6-pin plastic connector

Full Stroke Range:

R order code:	R125	OR25	OR50	0001	0002	0003	0005	0010	0020
clockwise shaft rotations, min:	0.125	0.25	0.50	1	2	3	5	10	20
accuracy (% of f.s.):	1.25%	1.25%	0.5%	0.5%	0.5%	0.2%	0.2%	0.15%	0.15%
potentiometer cycle life*:	2.5×10^6	2.5×10^6	2.5×10^6	2.5×10^6	2.5×10^6	5×10^5	5×10^5	2.5×10^5	2.5×10^5

R order code:	0030	0040	0050	0080	0100	0140	0180	0200
clockwise shaft rotations, min:	30	40	50	80	100	140	180	200
accuracy (% of f.s.):	0.15%	0.15%	0.15%	0.15%	0.15%	0.15%	0.15%	0.15%
potentiometer cycle life*:	2.5×10^5	2.5×10^5	2.5×10^5	2.5×10^5	2.5×10^5	2.5×10^5	2.5×10^5	2.5×10^5

*-number of times the sensor shaft can be cycled back and forth from beginning to end and back to the beginning before any measurable signal degradation may occur.





RT8510

0–45° TO 0–200 TURNS • 0...5, 0...10 Vdc

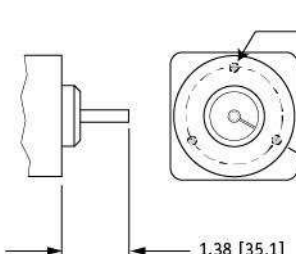
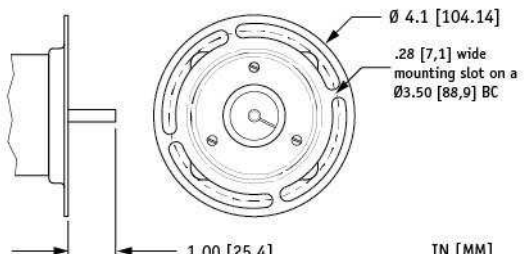
Enclosure Material:

A order code:	1	2
	powder-painted aluminum	303 stainless steel





Shaft Diameter:

B order code:	1	2	3	4
	0.25-in. diameter	6 mm diameter	0.25-in. dia. w/flats	6 mm dia. w/flats
	 .2497 in. (+.0000 -0.0003)	 5.995 mm (+.000 -0.025)	 0.33 in. 0.025 in.	 8.4 mm 0.64 mm

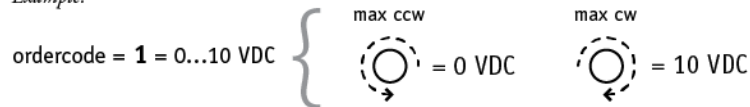
Mounting Style:

C order code:	1	2
	face mount	flange mount
	 <p>mounting holes spaced 120° apart on 2.00 [50,8] BC 6mm shaft option threaded M6 x 9 mm deep .25 in. shaft option #10-32 x 0.375 inch deep</p>	 <p>Ø 4.1 [104.14] .28 [7,1] wide mounting slot on a Ø3.50 [88,9] BC</p> <p style="text-align: right;">IN [MM]</p>

Output Signals:

D order code:	1	2	3	4
output signal options:	0...10 VDC	10...0 VDC	0...5 VDC	5...0 VDC
				
input voltage:	14.5...40 VDC		10.5...40 VDC	

Example:











RT8510

0–45° TO 0–200 TURNS • 0...5, 0...10 Vdc

Ordering Information









Electrical Connection:


<p>1</p> <p>order code:</p> <p>6-pin plastic connector w/mating plug IP 67, NEMA 4X**, 6</p>  <p>3.0 in. [78 mm]</p> <p>1/2 - 5/16" [14 - 8 mm] cable dia. 16 AWG max conductor size connector: MS3102E-14S-6P mating plug: MS3106E-14S-6S</p>	<p>2</p> <p>10-ft. [3 M] waterproof cable IP 67, NEMA 4X**, 6</p>  <p>10 ft. x 0.4-in. dia. [3 M x 10 mm dia.] 18 AWG, type SJTW</p>	<p>3</p> <p>6-pin metal connector w/mating plug IP 65, NEMA 4</p>  <p>2.4 in. [60 mm]</p> <p>3/8-in. [9 mm] max cable dia. 16 AWG max conductor size connector: MS3102E-14S-6P mating plug: MS3106E-14S-6S</p>	<p>4</p> <p>25-ft. [7.5 M] instrumentation cable IP 67, NEMA 6</p>  <p>25 ft. x 0.2-in. dia. [7,5 M x 5 mm dia.] 24 AWG, shielded</p>																												
<p>5</p> <p>100-ft. [30 M] waterproof cable IP 67, NEMA 4X**, 6</p>  <p>100 ft. x 0.4-in. dia. [30 M x 10 mm dia.] 18 AWG, type SJTW</p>	<p>6</p> <p>10-ft. [3 M] pressure tested* waterproof cable IP 68, NEMA 4X**, 6P</p>  <p>10 ft. x 0.4-in. dia. [3 M x 10 mm dia.] 18 AWG, type SJTW</p>	<p>7</p> <p>100-ft. [30 M] pressure tested* waterproof cable IP 68, NEMA 4X**, 6P</p>  <p>100 ft. x 0.4-in. dia. [30 M x 10 mm dia.] 18 AWG, type SJTW</p>																													
<p>6-pin Mating Plug</p> <table border="0"> <tr> <td>pin</td> <td>signal</td> </tr> <tr> <td>A</td> <td>input voltage</td> </tr> <tr> <td>B</td> <td>output signal</td> </tr> <tr> <td>C</td> <td>common</td> </tr> </table>  <p>contact view</p>		pin	signal	A	input voltage	B	output signal	C	common	<table border="0"> <tr> <th colspan="2">Waterproof Cable</th> <th colspan="2">Instrumentation Cable</th> </tr> <tr> <td>color code</td> <td>signal</td> <td>color code</td> <td>signal</td> </tr> <tr> <td>WHITE</td> <td>input voltage</td> <td>RED</td> <td>input voltage</td> </tr> <tr> <td>GREEN</td> <td>output signal</td> <td>GREEN</td> <td>output signal</td> </tr> <tr> <td>BLACK</td> <td>common</td> <td>BLACK</td> <td>common</td> </tr> </table>		Waterproof Cable		Instrumentation Cable		color code	signal	color code	signal	WHITE	input voltage	RED	input voltage	GREEN	output signal	GREEN	output signal	BLACK	common	BLACK	common
pin	signal																														
A	input voltage																														
B	output signal																														
C	common																														
Waterproof Cable		Instrumentation Cable																													
color code	signal	color code	signal																												
WHITE	input voltage	RED	input voltage																												
GREEN	output signal	GREEN	output signal																												
BLACK	common	BLACK	common																												

Notes: { * -Test pressure: 100 feet [30 meters] H₂O (40 PSID); Test Medium: Air; Duration: 2 hours.
** -NEMA 4X applies to stainless steel enclosure only.

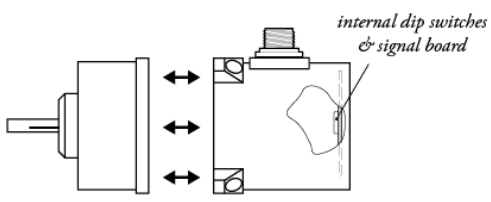
Output Signal Selection:

The output signal direction can be reversed at any time by simply changing the dip-switch settings found on the internal signal board. After the settings have been changed, adjustment of the Zero and Span trimpots will be required to precisely match signal values to the beginning and end points of the stroke.

output signal	switch setting	signal board
0...10 vdc		
10...0 vdc		
0...5 vdc		
5...0 vdc		



dip-switch location



internal dip switches & signal board

To gain access to the signal board, remove four Allen-Head Screws and separate the two case halves.

RT8510

0–45° TO 0–200 TURNS • 0...5, 0...10 Vdc

CLICK HERE >
CONNECT WITH A SPECIALIST

NORTH AMERICA
Tel +1 800 522 6752

EUROPE
Tel +31 73 624 6999

ASIA
Tel +86 0400 820 6015

te.com/sensors

TE Connectivity, TE, TE Connectivity (logo) and Every Connection Counts are trademarks. All other logos, products and/or company names referred to herein might be trademarks of their respective owners

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make to determine the suitability of each such product for the specific application.

© 2021 TE Connectivity Corporation. All Rights Reserved.

Version # 02/2021

