




# FLEXIBLE FLAT CABLE (FFC) TERMINATION

FFC BASE MACHINE MARK II


# FLEXIBLE FLAT CABLE (FFC) TERMINATION MACHINE



**FFC Base Machine Mark II PN 2475350-1**

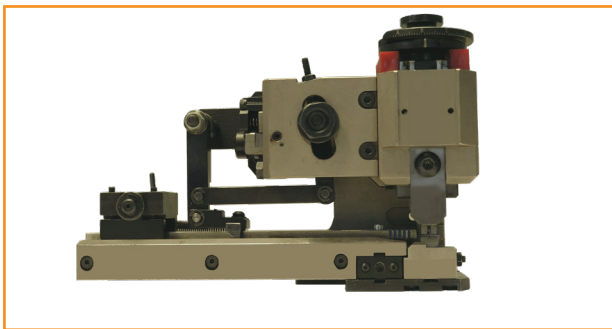

**Applicator for FFC Terminals / Mechanical Feed**

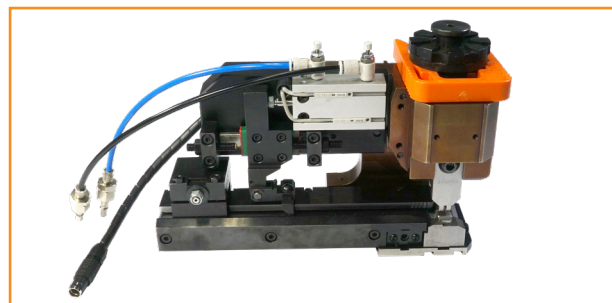

**Applicator for FFC Terminals / Pneumatic Feed**

The termination machine is an electrical driven semi-automatic assembly machine that uses different applicators to terminate reel-feed FFC terminals to manually supplied FFC cables. The machine terminates a predefined number of contacts to the supplied cable end. Individual conductor positions can be skipped during the assembly sequence.

## Features

- Alignment of the cable is effected in the machine
- Number of pins can be programmed
- Pitches between 1.27 mm and 5.08 mm can be programmed
- Individual wire positions can be skipped
- Operator friendly interface via touch screen
- Interchangeable applicators available for different products
- Quick change of the applicator

## Compatible TE Connectivity Products

- FFC MQS and MQS+ terminals
- FFC Junior Timer terminals
- FFC AMPMODU .100 terminals
- FFC AMPMODU .050 terminals
- FFC Card Edge terminals
- ACTION PIN terminals
- FFC soldering terminals
- FFC Nano MQS terminals

## Options for Harnessing

- Flexible Flat Cable (FFC)
- Flexible Printed Circuit (FPC)

Processable widths are depending on the number of connector positions and on the foil contour.

Possible number of crimps:

Pitch 5.08 mm = 18 crimps

Pitch 2.54 mm = 37 crimps

Pitch 1.80 mm = 52 crimps

Pitch 1.27 mm = 74 crimps

Other pitches upon request

### Requirements for Processing FFC and FPC

Foil length min. 50 mm  
Foil stop necessary for foil pitch  
< 4 x 2.54 mm

### Requirements for correct Sensor Function

Min. 25 mm straight conductor length  
Foil must be transparent

#### Remark:

A quote can be given only after test and qualification of the foil to be terminated.

### Technical Data

Crimping force: 15 kN  
Press stroke: 40 mm [1.56 in]  
Weight: 100 kg  
Reel diameter: 610 mm [24 in]  
Power supply: 230/240 V, 50 Hz  
Compressed air supply : 6 bars  
Crimping rate: approx. 3 contacts/sec  
Dimensions of machine with reel (H x W x D):  
1200 x 1200 x 600 mm

### Optional components:

Paper winder

The termination machine is an electrical driven semi-automatic assembly machine that uses different applicators to terminate reel-feed FFC terminals to manually supplied FFC cables.

Together with the FFC Applicator, the machine terminates the end of the supplied Flexible Flat Cable.


#### Remarks:

- The FFC Applicator is not part of the machine and has to be ordered separately.
- Only end termination of the contacts.

### Base Machine PN 2475350-1

#### Currently available Applicators


Terminals/Contacts	Mechanical Applicator	Pneumatic Applicator
FFC MQS / MQS+	5-528441-3	-
FFC Junior Timer	3-528441-7	-
FFC AMPMODU .100	5-528441-5	-
FFC AMPMODU .050	3-528441-9	-
FFC Nano MQS	3-528508-2	3-528508-7
ACTION PIN	5-528441-6	-
FFC Soldering Contact	5-528441-7	-

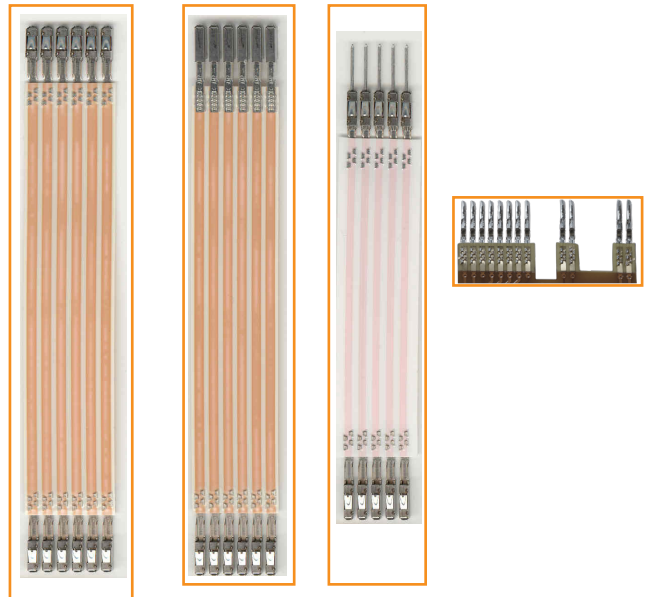





## Let's Connect

Learn more about our comprehensive line of tooling solutions at [tooling.te.com](http://tooling.te.com).



## TE Connectivity Technical Support Center

USA:	1.800.522.6752	UK:	+44.0800.267666
Canada:	1.800.522.6752	France:	+33.1.34.20.8686
Mexico:	+52.55.11.06.0800	Netherlands:	+31.73.624.6999
Latin/S. America	+54.11.4733.2200	China:	+86.400.820.6015
Germany:	+49.6151.607.1999		



## te.com

TE Connectivity and the TE connectivity (logo) are trademarks. All other logos, products and/or company names referred to herein might be trademarks of their respective owners.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

© 2019 TE Connectivity Ltd. family of companies All Rights Reserved.

2338145-1 Rev D. 11/23

### Contact us today to learn more

E-mail (Americas): [fieldservicesnorthamerica@te.com](mailto:fieldservicesnorthamerica@te.com)

Phone (Americas): 800-722-1111 or 717-986-3434

E-mail (EMEA): [TEFE1@te.com](mailto:TEFE1@te.com)

Phone (EMEA): +49-6151-607-1518

For additional information download catalog no. 1-1307619-0 from [tooling.te.com](http://tooling.te.com).

[www.te.com](http://www.te.com)