


B 10050*-233

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
B	REVISED PER E.O. C1218	3-26-93	Ⓟ

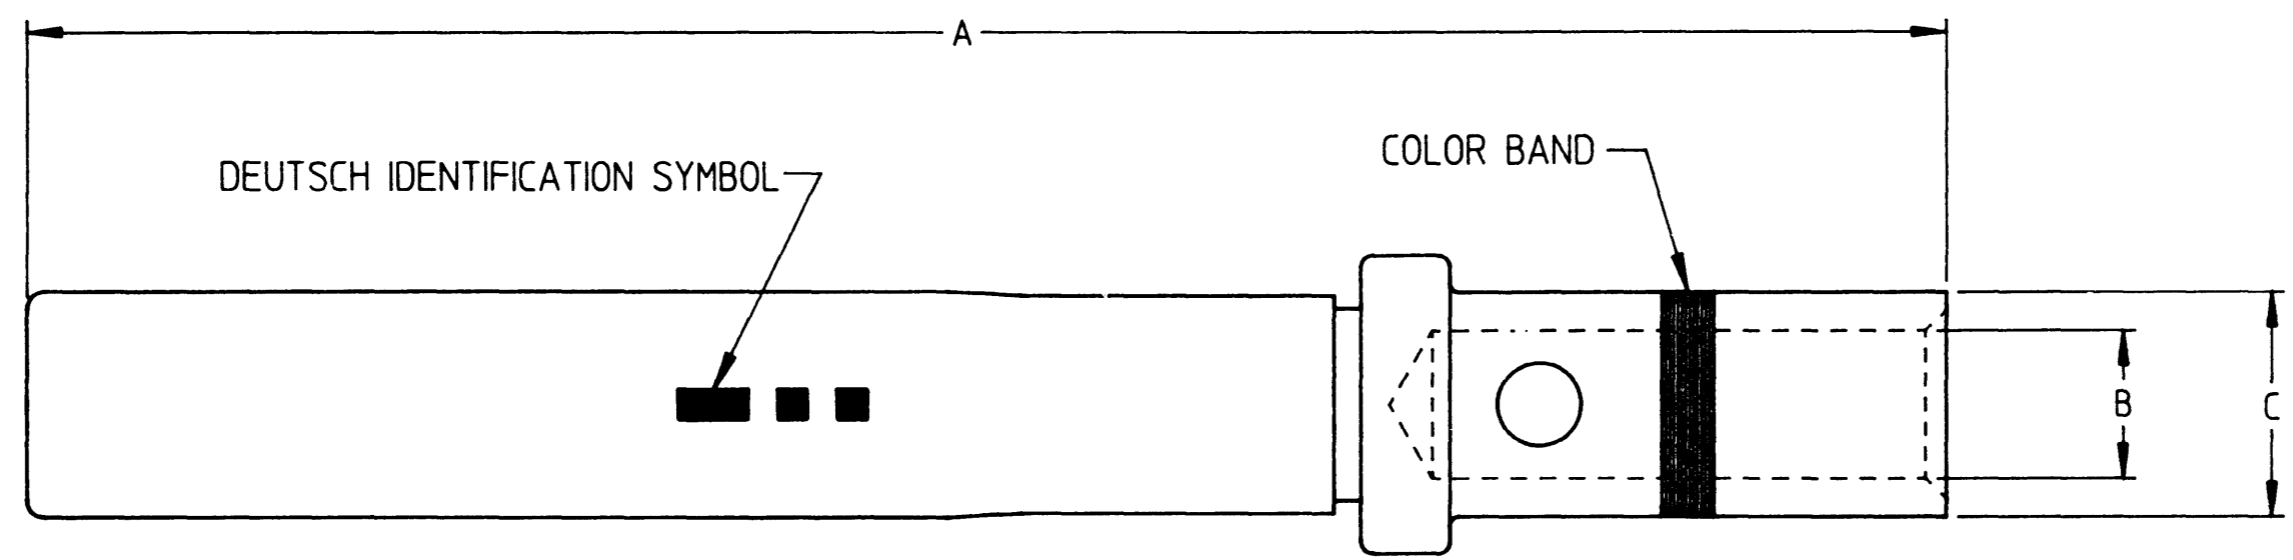

PART NO. *	COLOR BAND	SIZE	WIRE GAGE RANGE	RECOMMENDED STRIP LENGTH	CRIMP TOOL	POSITIONER	A MAX.	B MIN.	C MAX.
100503-233	RED	20	20,22,24	.156 TO .219	M22520/1-01	M22520/1-02 RED	.656	.048	.078
100504-233	BLUE	16	16,18,20	.250 TO .313	M22520/1-01	M22520/1-02 BLUE	.759	.066	.103

5. CONTACTS PASS ALL REQUIREMENTS OF MIL-C-39029 AFTER 1500 MATING CYCLES.
4. FOR THE MATING PIN CONTACT P/N, SEE DRAWING 0641-*-*233.
3. MATERIAL: BODY - COPPER ALLOY PER MIL-C-39029, TYPE A.
SLEEVE - STAINLESS STEEL.
2. FINISH: BODY - DEUTSCH ALLOY OVER NICKEL PER QQ-N-290.
SLEEVE - PASSIVATED.
1. DIMENSIONS ARE IN INCHES UNLESS OTHERWISE SPECIFIED.

NOTE:

SIGNATURE & DATE	
DR	R. GROSS 11-30-92
CHK	Jo POWELL 12-3-92
FE	R. Gross 11-30-92
APPD	
SCALE	NONE WT

CONTACT, SOCKET
CRIMP TYPE
MIL-C-39029/5 TYPE CONTACTS
WITH DEUTSCHCOAT V
ENVELOPE

CP	MATL CODE
DEUTSCH ENGINEERED CONNECTING DEVICES Municipal Airport Banning, California	
B	10050*-233
DWG SIZE	CODE 11139 SHEET 1 OF 1

10050X-233_B