

HIGH VOLTAGE DC CONTACTORS ECP150B SERIES

UP TO 350AMP

INTRODUCTION

ECP150B series high-voltage DC contactor is designed for control in high voltage environment in battery energy storage system, solar inverter and EV charging applications. It can be used in the 1500 VDC voltage system and the enhanced insulation distance can fully meet the requirement in UL60947-4-1 and IEC60947-4-1 standard. The contacts of the ECP150B contactors allow for bi-directional load. Hermetically sealed with ceramic sealing technology makes it safe and reliable.


FEATURES

- Hermetically sealed with ceramic technology
- 350 A continuous carry current capability
- Max. breaking capacity 1500 VDC at 1000 A
- Allow for bi-directional load
- Dual coil design with hold power 5.0 W
- Equipped with auxiliary contact
- Comply with DC-1 utilization category in IEC60947-4-1

APPLICATIONS

ECP150B contactors can be used for multiple applications including some of the below highlighted

- Battery energy storage systems
- Photovoltaic inverters
- Power conversion system
- Megawatt EV DC charger

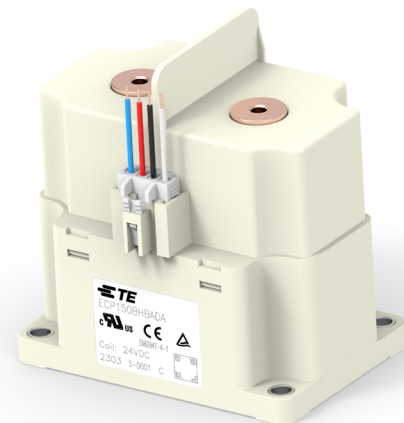

APPROVALS

UL, TUV, CE



Note: Technical data of approved types on request

High Voltage DC Contactors ECP150B Series

MAIN CONTACT DATA

Contact current	350 A
Max. switching voltage	1500 VDC
Max. Breaking capacity	1500 VDC, 1000 A, 1 cycle 1500 VDC, 800 A, 3 cycles 1000 VDC, 2000 A, 1 cycle
Contact arrangement	1 Form X (SPST-NO-DM)
Initial contact resistance	≤ 0.4 mOhm (150 A, after 1 minute)
Operate time max. (at 23°C)	50 ms
Release time, max. (at 23°C)	20 ms
Mechanical Life	200,000 cycles

CONTACT RATINGS

Load	Cycles
100 A, 1500 VDC, make/break, resistive	6,000
350 A, 1000 VDC, break only, resistive	800
150 A, 1500 VDC, break only, resistive	2,500

Note:

- Only typical rating listed, please refer to make/break curves in next page for more details at different current and voltage.

CE DECLARATION (IEC60947-4-1)

Rated Operational Current	Rated Operational Voltage	Utilization Category	Switching Cycles
60A	1500VDC	DC-1	6,050

AUXILIARY CONTACT DATA

Contact Form	1 Form A (SPST-NO)
Contact Current, Max.	2 A, 24 VDC
Contact Current, Min.	10 mA, 24 VDC

COIL VERSIONS, DC COIL

Coil Code	Nominal Voltage	Operate Voltage	Release Voltage	Maximum Operate Voltage	Coil Power
A	12 VDC	≤ 9 VDC	≥ 1.2 VDC	16 VDC	Start: 50 W Hold: 5 W
B	24 VDC	≤ 18 VDC	≥ 2.4 VDC	32 VDC	Start: 50 W Hold: 5 W

All figures are given for coil without pre-energization, at ambient temperature +23°C, and the coil will be automatically switched to 5W hold status after about 200ms energization with coil power 50W.

INSULATION DATA


Dielectric withstand voltage (leakage current <1mA)	
Between open main contacts	5,400 V _{rms}
Between main contact and coil	5,400 V _{rms}
Between main contacts and aux contacts	5,400 V _{rms}
Between open aux contacts	750 V _{rms}
Initial insulation resistance @ 1500VDC	
Between insulated elements	> 1x10 ⁹ Ω

OTHER DATA

Material compliance	EU RoHS/ELV, China RoHS, REACH, Halogen content refer to the Product Compliance Support Center at www.te.com/customer-support/rohssupportcenter
Ambient Temperature	-40 °C to 85 °C
Vibration Resistance (functional)	Sine, 10-2000Hz, 5G
Shock Resistance (functional)	11ms 1/2 Sine, Peak 20G
Terminal Type	Screw for contact, wire for coil
Weight	~1300 g
Packaging/unit	box/9 pcs.

High Voltage DC Contactors ECP150B Series


CURRENT CARRY CAPABILITY CURVE

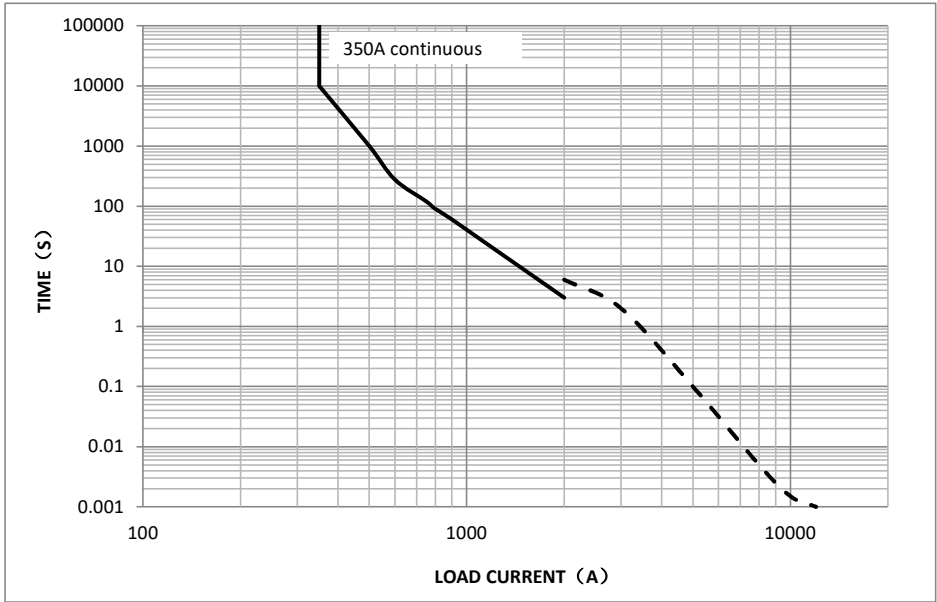

NOTE

- 1. ——— Overload current carry endurance. The data is measured at the environment temperature 85 °C with cross section area of wire 120 mm² min.
- 2. - - - - Short circuit current endurance. The data is measured at the environment temperature 23 °C with cross section area of wire 185 mm² min. >2000 A short circuit current, the judgement criteria of the above reference data is no burning or explosion.

ESTIMATED MAKE & BREAK POWER SWITCHING RATINGS




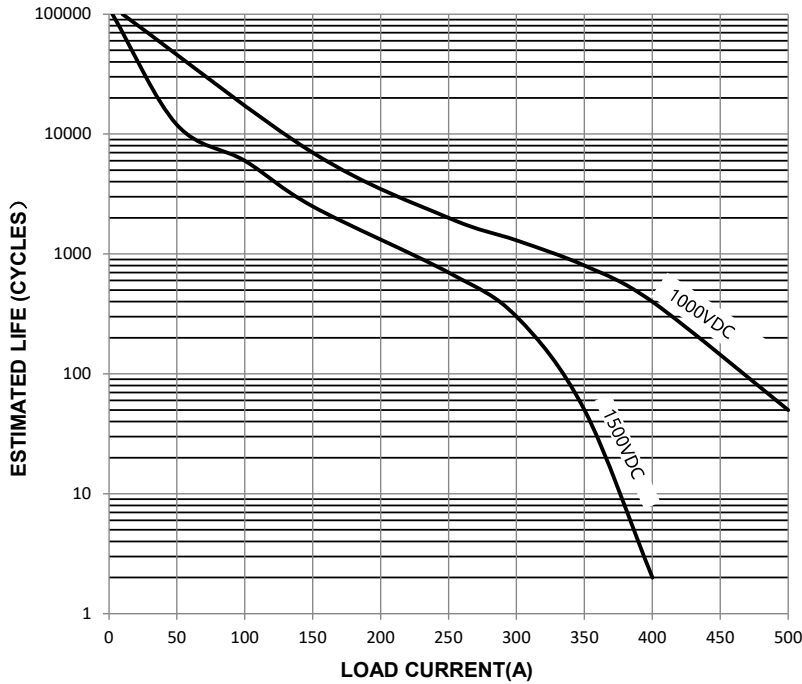


NOTE

- 1. The curve was created based on extrapolated data with few typical points, users are recommended to confirm performance in actual application.
- 2. The typical data were estimated with resistive load at room temperature.
- 3. Over 100 A @ 1500 VDC, only estimated under break only, 1 s on/20 s off, others were estimated under make and break, 1 s on/9 s off.


High Voltage DC Contactors ECP150B Series

DIMENSIONS (Unit: mm)

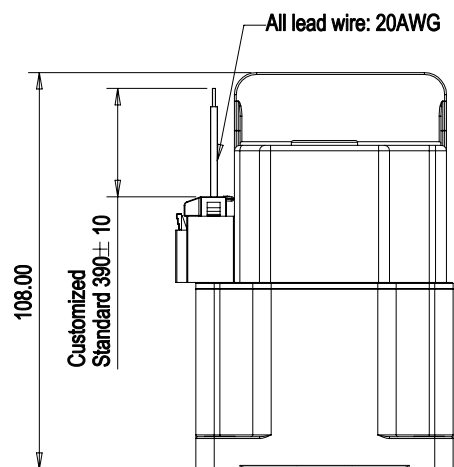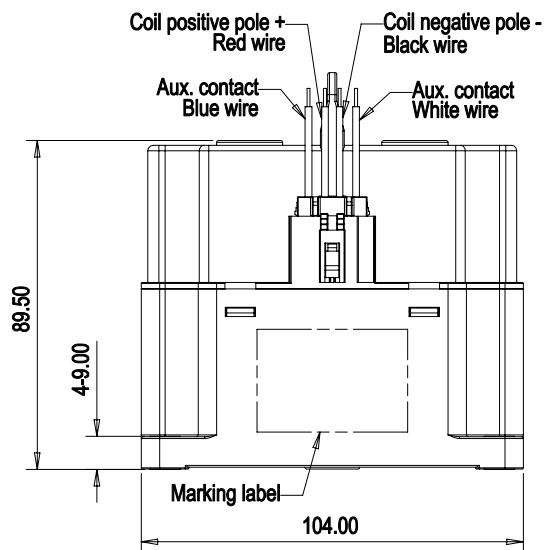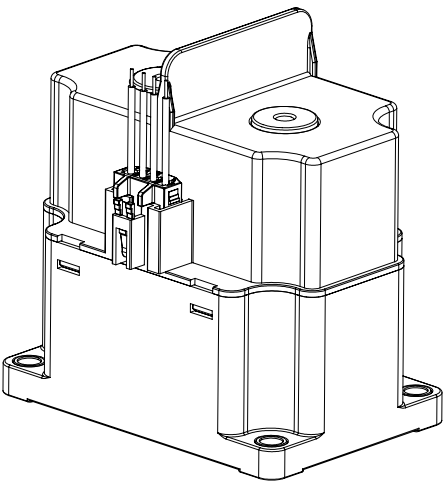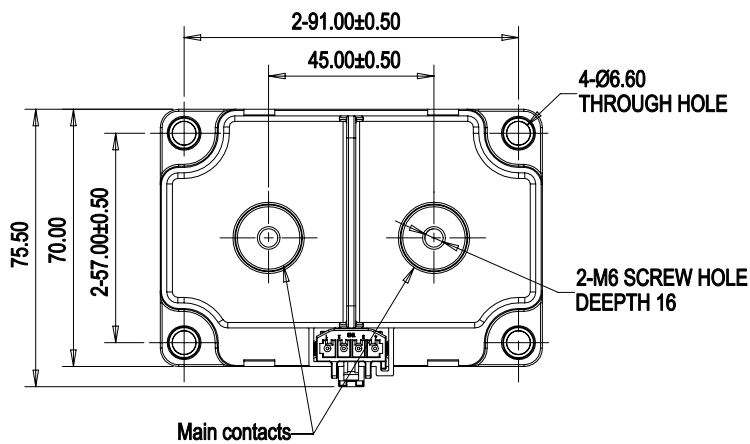

General tolerance	
Dimension	Tolerance
<10	±0.4
10~50	±0.8
>50	±1.2

CIRCUIT DIAGRAM

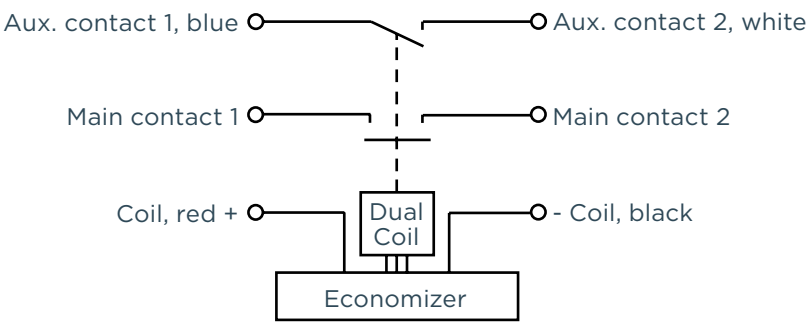


High Voltage DC Contactors ECP150B Series

PRODUCT INFORMATION

Product code	Contact Form	Mounting Position	Coil	Coil Control Mode	Part Number
ECP150BHAADA	Normally open, with auxiliary contacts (N.O.)	Bottom	12 VDC	Dual coil	2071568-1
ECP150BHBADA			24 VDC		2071568-2

PRODUCT CODE STRUCTURE

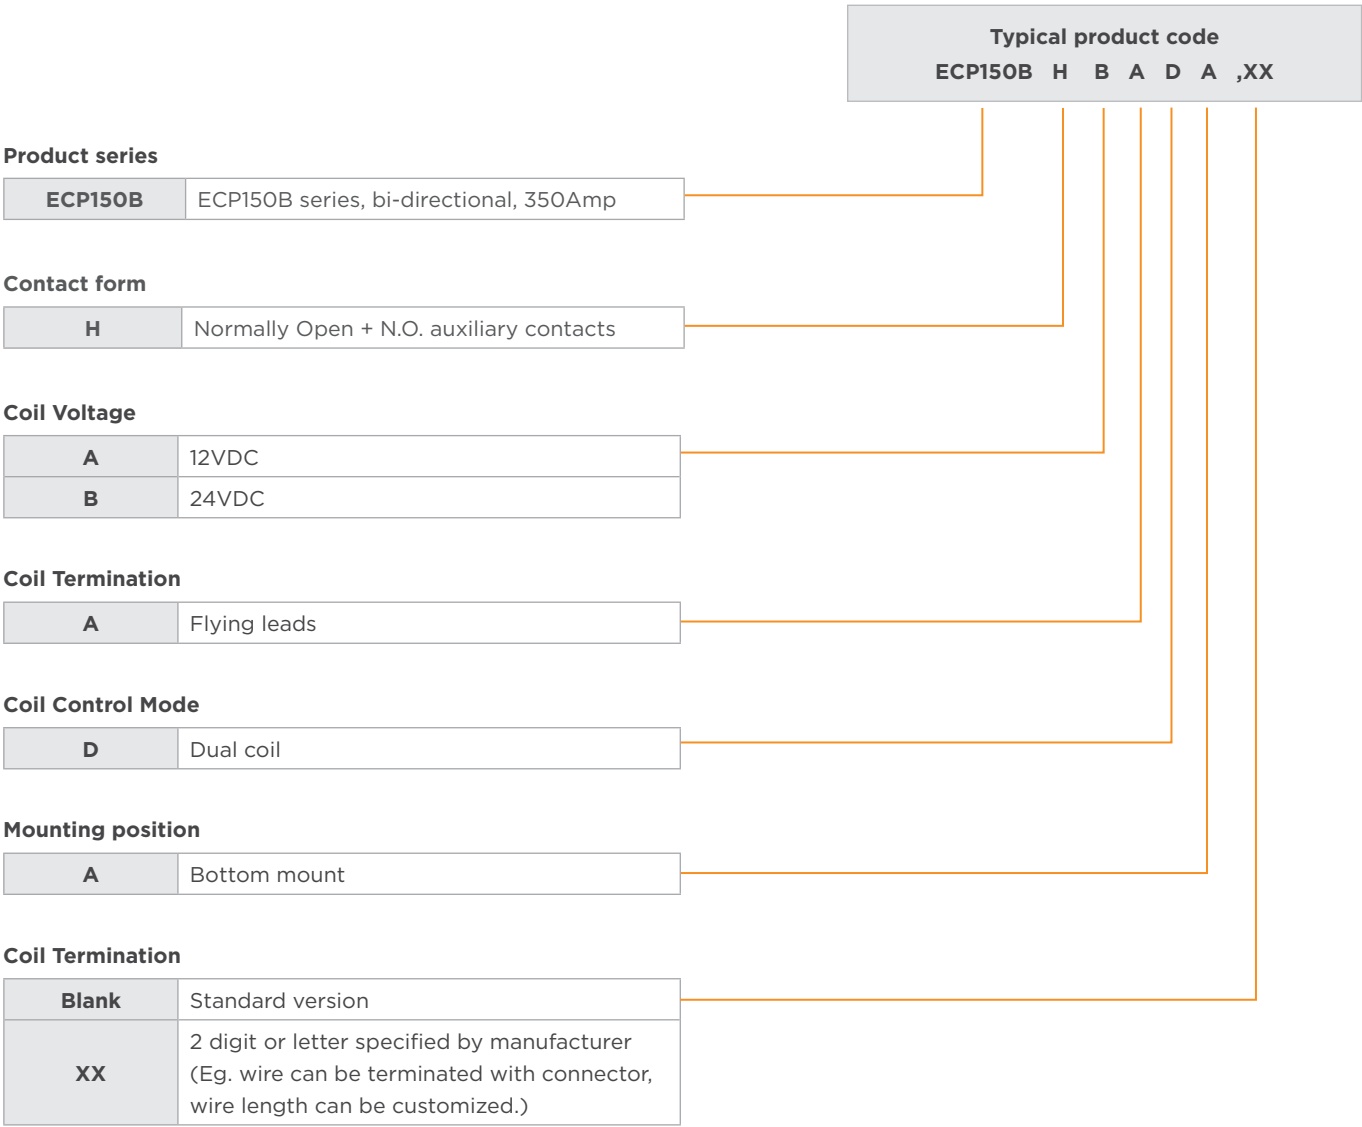

CAUTIONS

1. Do not use the product when product is dropped or broken.
2. Avoid mounting the contactor main contact terminals in downward direction, otherwise the contactor performance will not be guaranteed.
3. There is no polarity difference at the load connection end of this contactor, and no polarity difference at the auxiliary contact connection end. There is a polarity difference at the coil connection end: the red wire is connected to the positive pole of the control power supply, and the black wire is connected to the negative terminal of the control power supply. Please pay attention to the correct installation and use.
4. The nominal value of the contact is the value when the resistive load is applied. In the case of an inductive load (L-load) of $L/R \geq 1$ ms, take surge absorption measures in parallel with the inductive load. Otherwise the electrical performance cannot be guaranteed.
5. This product has built-in coil suppression reverse electromotive force circuit, so it does not require surge suppression device. When performing this action voltage test, the voltage cannot rise slowly, Please drive the product coil through the fast rising (step type power supply mode), otherwise the contactors will not operate.
6. The coil type of this product is dual coil, and the coil will be automatically switched to "hold" status after about 0.2 seconds of energization, and the contactor may not operate if energization is less than 0.2 s.
7. It is strictly forbidden to place the contactor in an environment that exceeds the temperature range of the product ($-40^{\circ}\text{C} \sim +85^{\circ}\text{C}$) for a long time.
8. Please avoid installing near strong magnetic boundaries (around transformers and magnets) and heating objects.
9. In order to prevent loosening, please use the gasket correctly when installing the contactor. Screw locking torque of main contact terminals should be 8-10 N·m for M6 screw. Screw locking torque of product bottom mounting should be 3-4 N·m for M5 screw.
10. Please avoid adhering to foreign matter such as grease on the lead end, To maintain the maximum long-term performance, user should select the appropriate connection cable cross section or active cooling to control the temperature.

Notes:

1. Datasheets and product specification according to IEC 61810-1, EN/IEC60947-4-1, UL60947-4-1 and to be used only together with the 'Definitions' section.
2. Datasheets and product data is subject to the terms of the disclaimer and all chapters of the 'Definitions' section, available at <http://relays.te.com/definitions>.
3. Datasheets, product data, 'Definitions' section, application notes and all specifications are subject to change.

te.com

©2024 TE Connectivity Plc. Family of Companies. All Rights Reserved.

TE Connectivity, TE connectivity (logo) and Every Connection Counts are trademarks owned or licensed by the TE Connectivity Plc. family of companies. All other logos, products and/or company names referred to herein might be trademarks of their respective owners.

While TE has made every reasonable effort to ensure the accuracy of the information in this document, TE does not guarantee that it is error-free, nor does TE make any other representation, warranty or guarantee that the information is accurate, correct, reliable or current. TE reserves the right to make any changes to the information contained herein without prior notice. TE Connectivity assumes only those obligations set forth in the terms and conditions for this product and shall in no event be liable for any incidental, indirect, or consequential damages arising out of the sale, resale, use, or misapplication of the product. TE expressly disclaims any implied warranties with respect to the information contained herein, including, but not limited to, implied warranties of merchantability or fitness for a particular purpose. Dimensions, specifications and/or information contained herein are for reference purposes only and are subject to change without notice. Consult TE for the latest dimensions, specifications and/or information. Users of TE Connectivity products must make their own assessment as to whether the respective product is suitable for the respective desired application.

12/24 ED