



te.com

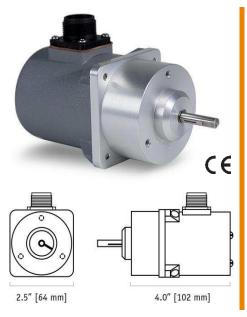

Celesco's model RT8101 provides a voltage feedback signal for rotational position. The sensing element of this device is a precision plastic-hybrid potentiometer which provides superb linearity and resolution.

The RT8101 provides extended rotational position feedback from as little as 1/8 of a turn f.s. all the way up to 200 turns f.s. Because the sensor is potentiometric, the RT8101 is absolute and will maintain position information even after a loss of power.

Output Signal



*—1K, 5K, 10K-ohm and bridge circuit also available. see orderina info.

CLICK HERE > CONNECT WITH A SPECIALIST

RT8101

0-45° TO 0-200 TURNS • VOLTAGE DIVIDER

Industrial Grade Rotational Position Sensor Absolute Rotary Position up to 200 turns Aluminum or Stainless Steel Enclosure Options IP68 / NEMA 6

General


Full Stroke Range	0-0.125 to 0-200 turns
Output Signal Options	voltage divider (potentiometer)
Accuracy	0.15% to 1.25%, see ordering information
Repeatability	± 0.05% full stroke
Resolution	essentially infinite
Enclosure Material Options	powder-painted aluminum or stainless steel
Sensor	plastic-hybrid precision potentiometer
Potentiometer Cycle Life	see ordering information
Shaft Loading	up to 10 lbs. radial and 5 lbs. axial
Starting Torque (25°C)	2.0 in-oz., max.
Weight, Aluminum (Stainless Steel) Enclosure	3 lbs. (6 lbs.) max.

Electrical

Input Resistance Options	see ordering information
Power Rating, Watt	2.0 at 70°F derated to 0 at 250°
Recommended Maximum Input Voltage	30 V (AC/DC)
Output Signal Change Over Full Stroke Range	94% ±4% of input voltage
Environmental	

Enclosure	NEMA 4/4X/6, IP 67/68
Operating Temperature	-40° to 200°F (-40° to 90°C)
Vibration	up to 10 g to 2000 Hz maximum

Outline Drawing

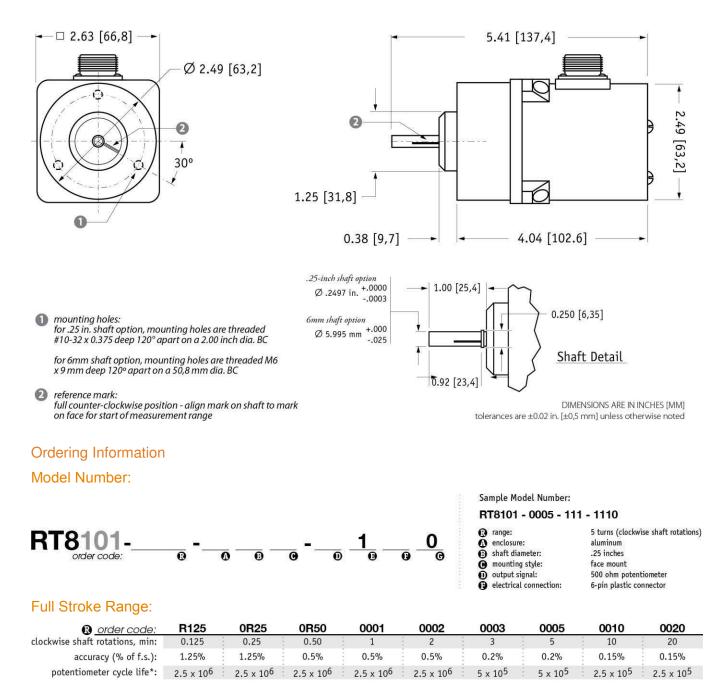


R order code:	0030		0040		0050		0080		0100		0140		0180		0200
clockwise shaft rotations, min:	30		40		50		80	1	100		140	11.1	180		200
accuracy (% of f.s.):	0.15%	÷	0.15%		0.15%		0.15%		0.15%		0.15%	-	0.15%	-	0.15%
potentiometer cycle life*:	2.5 x 10 ⁵	÷	2.5 x 10 ⁵	÷	2.5 x 10 ⁵	-	2.5 x 10 ⁵	1	2.5 x 10 ⁵	1	2.5 x 10 ⁵	÷	2.5 x 10 ⁵	3	2.5 x 10 ⁵

*-number of times the sensor shaft can be cycled back and forth from beginning to end and back to the beginning before any measurable signal degradation may occur.


RT8101

0-45° TO 0-200 TURNS • VOLTAGE DIVIDER


Enclosure Material:

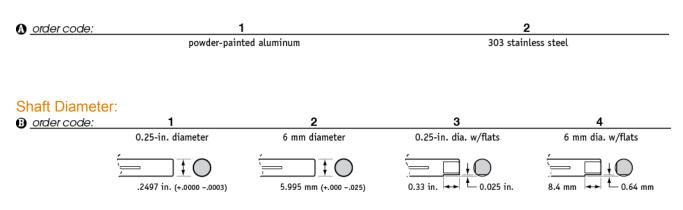


Mounting Style:

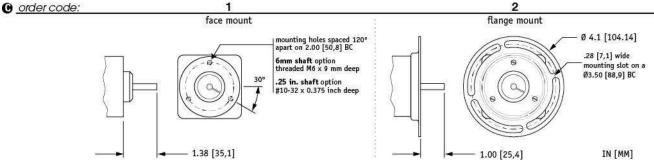

Output Signals:

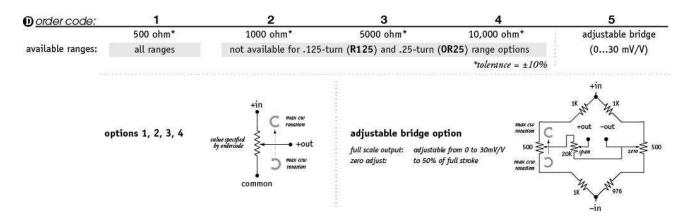

0-45° TO 0-200 TURNS • VOLTAGE DIVIDER

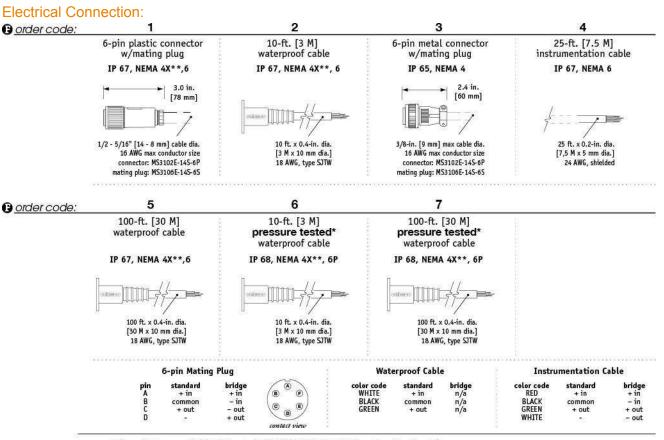

Notes: $\begin{cases} * & -Test \ pressure: \ 100 \ feet \ [30 \ meters] \ H_2O \ (40 \ PSID); \ Test \ Medium: \ Air; \ Duration: \ 2 \ hours. \\ ** & -NEMA \ 4X \ applies \ to \ stainless \ steel \ enclosure \ only. \end{cases}$

CLICK HERE > CONNECT WITH A SPECIALIST

NORTH AMERICA Tel +1 800 522 6752 EUROPE Tel +31 73 624 6999 ASIA Tel +86 0400 820 6015

te.com/sensors

TE Connectivity, TE, TE Connectivity (logo) and Every Connection Counts are trademarks. All other logos, products and/or company names referred to herein might be trademarks of their respective owners

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

© 2021 TE Connectivity Corporation. All Rights Reserved.

Version # 02/2021

