THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION –,– .
© COPYRIGHT – By – ALL RIGHTS RESERVED.

MATED WITH: PASSEND ZU: HA 16

PROJEKT NR.: —

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	D5	ECR-16-009336	08DEC2016	GCM	MKO

SCREW TERMINATION

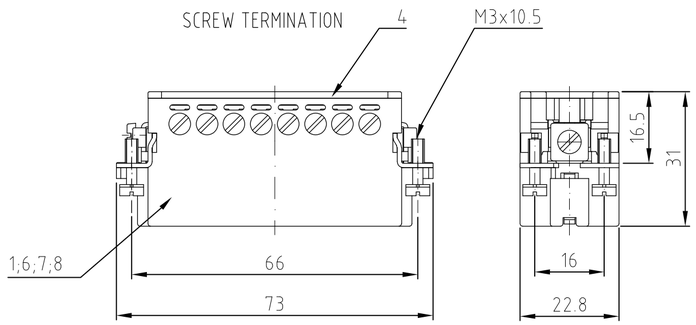

CRIMP TERMINATION

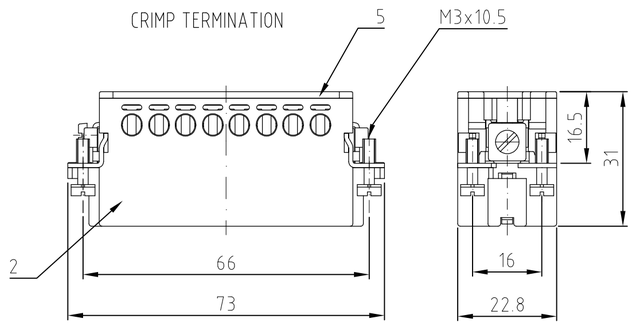

SPRING CLAMP TERMINATION

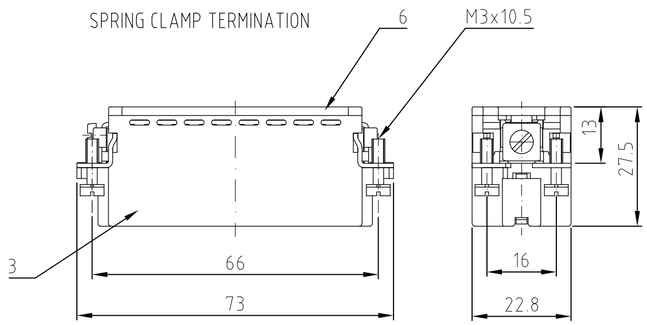

Contact arrangement / view from termination side



Contact arrangement / view from termination side



Contact arrangement / view from termination side



Contact arrangement / view from termination side



Panel cut-out for contact insert

when used without housing

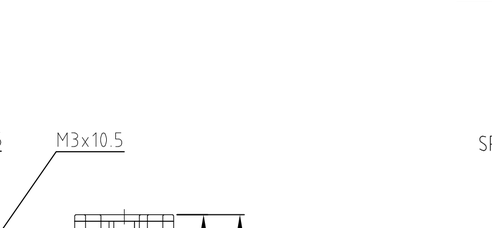

Assembling instruction



10 DISTANCE FOR SAFETY CONTACT MARKING MAX. 24 mm

NOTES:

1 SUITABLE CRIMP CONTACTS: SERIES HE/HA
OUTER DIMENSIONS OF INSULATION: MAX. Ø3,2 MM

2 SUITABLE HOOD SIZE 5; 7; 9; 11: SERIES HA; HD
SUITABLE INSERTION AND EXTRACTION TOOL:
SCREWDRIVER 0,5x3 DIN 5264

3 Strip lenght: Screw conection 10mm
Spring clamp conection 10mm Crimp conection 7.5mm

4 STANDARDS:
DIN EN 61984; DIN EN 60664-1

5 PACKAGING:
5 SETS IN A CARTON, PRE-MOUNTED

6 SPECIAL PACKAGING: Krauss-Maffei
PACKAGING UNIT: 300 PIECES

7 SPECIAL PACKAGING: Krauss-Maffei
PACKAGING UNIT: 150 PIECES

8 SPECIAL PACKAGING: AIS
PACKAGING UNIT: 250 PIECES

9 SPECIAL PACKAGING: WIELAND
PACKAGING UNIT: 100 PIECES

SEE TE CONNECTIVITY QUALITYMANAGEMENT PROCEDURE NO. 1.12

ORDERING TEXT / BESTELLTEXT	1-3	1-2	1-0	0-4	0-7	0-6	0-5	2-9	1-9	7-9	7-8	1-8	2-8	1-7	7-7	2-7	7-1	2-3	1-1	DESCRIPTION / BENENNUNG	MATERIAL	COLOR / FARBE	ITEM NO. POS.	REMARKS / BEMERKUNGEN
HA.16.Sti.S.B1-16.WIE	1	1	1	1				1	1											Pin insert crimp/screw	PBT	light beige	1	
HA.16.Sti.S.B1-16.AIS	1	1	1	1						1	1				1		1			pin insert spring clamp	PBT	light beige	2	
HA.16.Sti.S.B17-32.KM	1	1	1									1	1	1		1		1	1	Cover	PBT	light beige	3	
HA.16.Sti.S.B1-16.KM								1												Cover	PBT	light beige	4	
HA.16.Sti.S-VA.B1-16					1					1	1				1		1			Cover	PBT	light beige	5	
HA.16.Sti.S-VA.B17-32						1														Pin insert screw	PBT	light beige	6	with AU contact
HA.16.Sti.S-AU.B1-16							1													Pin insert screw	PBT	light beige	7	with stainless steel-fixing screw
HA.16.Sti.C.B 49-64								1												Pin insert screw	PBT	light beige	8	with stainless steel-fixing screw
HA.16.Sti.S.B 49-64									1															
HA.16.Sti.SC.B 49-64										1														
HA.16.Sti.SC.B 33-48											1													
HA.16.Sti.S.B 33-48												1												
HA.16.Sti.C.B 33-48													1											
HA.16.Sti.S.B 17-32														1										
HA.16.Sti.SC.B 17-32															1									
HA.16.Sti.C.B 17-32																1								
HA.16.Sti.SC.B 1-16																	1							
HA.16.Sti.C.B 1-16																		1						
HA.16.Sti.S.B 1-16																			1					

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ±
1 PLC ±
2 PLC ±
3 PLC ±
4 PLC ±
ANGLES ±

MATERIAL –

FINISH –

DWN Schneider 09.02.2000
CHK Schweiger 09.02.2000
APVD —
PRODUCT SPEC 108-74007
APPLICATION SPEC 114-77009
WEIGHT

TE Connectivity

NAME Male insert HA.16.Sti.C —

SIZE A2 | CAGE CODE 00779 | DRAWING NO C-1103416 | RESTRICTED TO —

CUSTOMER DRAWING | SCALE 1:1 | SHEET 1 OF 1 | REV D5

1103416