© – TE Connectivity. All Rights Reserved.

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	E7	REVISED PER ECR-24-201443	23APR2024	RK	WR

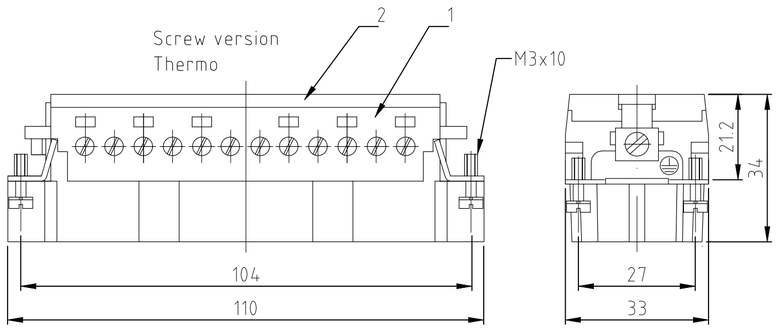

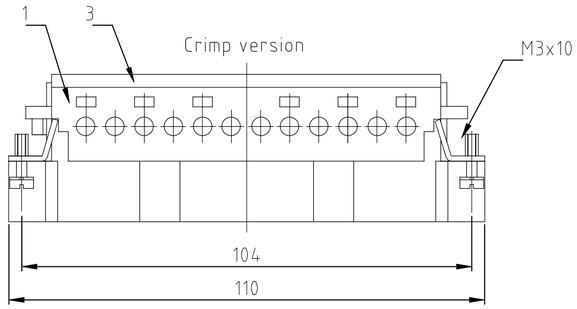

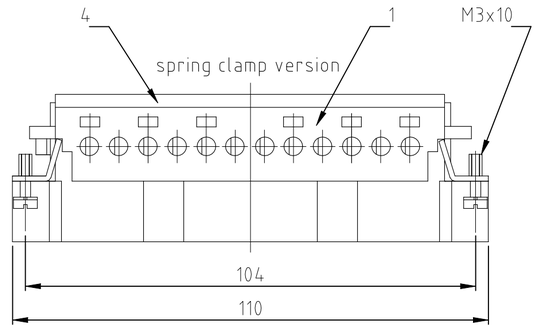

Assembly directions



× Distance for a safe contact max: 21 mm

Contact arrangement view from termination side

Printing 1-24 Thermo

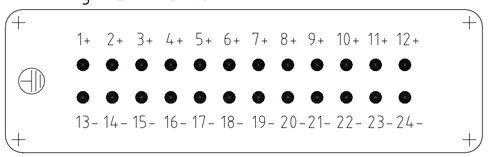

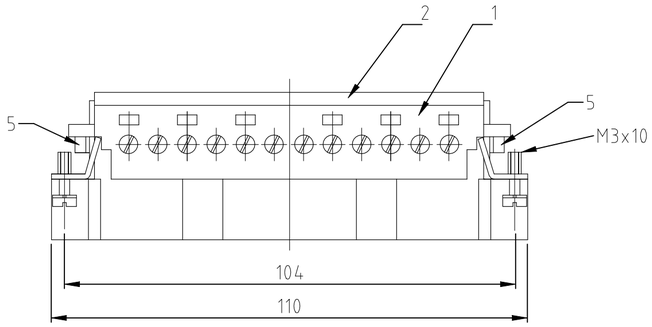

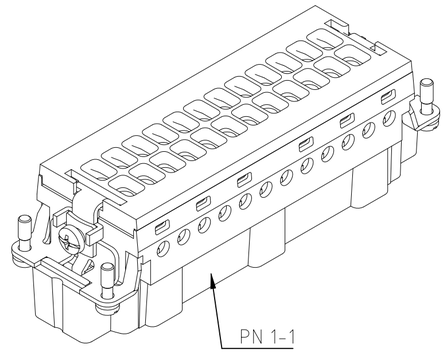

Printing 1-24 Screw

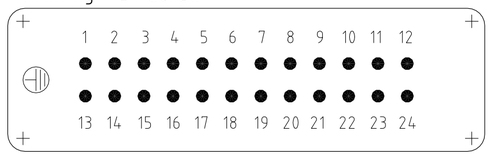

Panel cut-out for contact insert when used without housing

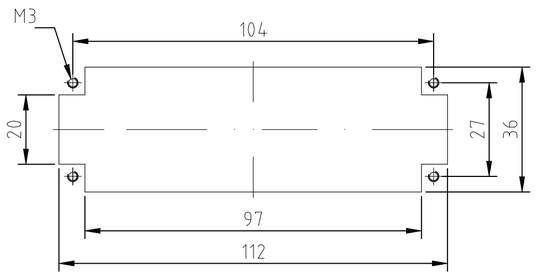

Printing 25-48 Screw

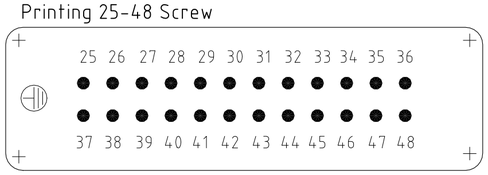

Printing 12+6+6 Screw/Thermo

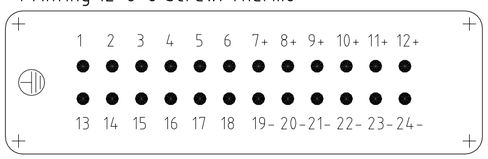

NOTES:

1 SUITABLE CRIMP CONTACTS: SERIES HE/HA
OUTER DIMENSIONS OF INSULATION: MAX. ⌀3,2 MM

2 SUITABLE HOOD SIZE 8; 12: SERIES HB; HD; HIP; EMV
SUITABLE INSERTION AND EXTRACTION TOOL:
SCREWDRIVER 0,5x3 DIN 5264

3 Strip lenght: Screw conection 10mm
Spring clamp conection 10mm Crimp conection 7.5mm

4 STANDARDS:
DIN EN 61984; DIN EN 60664-1

⚠5 PACKAGING:
5 SETS IN A CARTON, PRE-MOUNTED

⚠6 SPECIAL PACKAGING: Krauss-Maffei
PACKAGING UNIT: 220 PIECES

| | | | | |