© – TE Connectivity. All Rights Reserved.

| REVISIONS | | | | | |
|---|---|---|---|---|---|
| P | LTR | DESCRIPTION | DATE | DWN | APVD |
| | E6 | REVISED PER ECN-24-266180 | 20AUG2024 | RK | WR |













Contact arrangement view from termination side

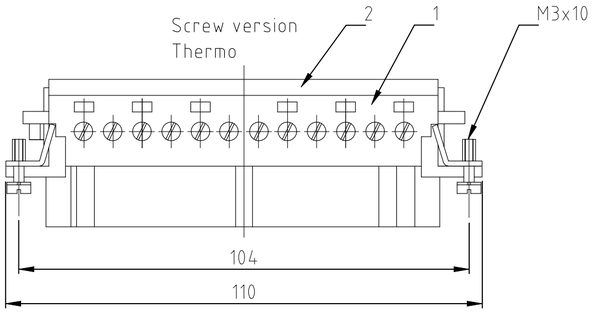Printing 1-24 Thermo




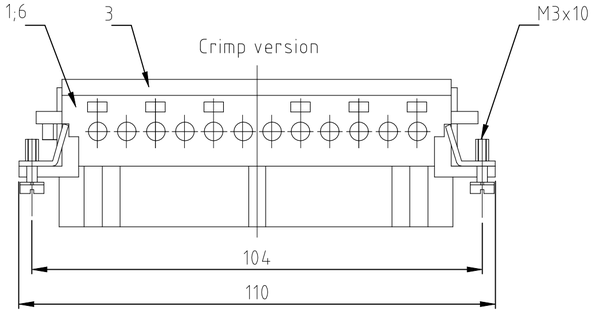Contact arrangement view from termination side

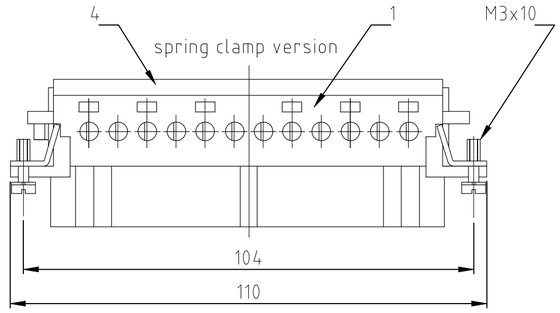Printing 1-24




Printing 25-48

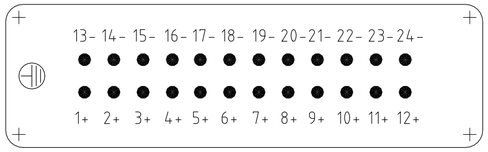


assembly directions

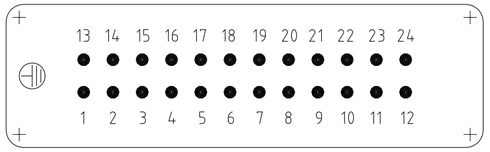


× distance for a safe
contact max: max: 21 mm

Printing 1-24 Screw

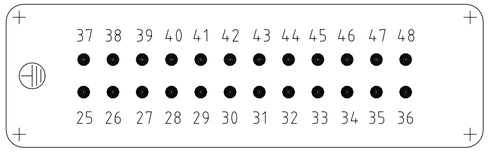


Panel cut-out for contact insert when used without housing




Printing 25-48 Screw

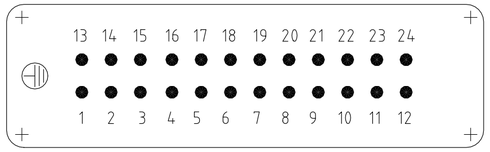


Printing 12+6+6 Screw/Thermo

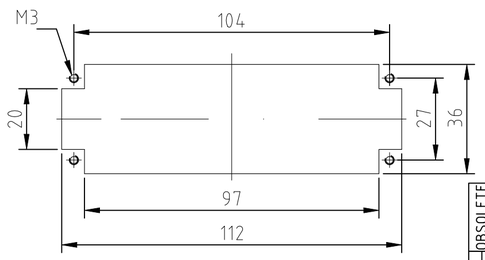


NOTES:

1 SUITABLE CRIMP CONTACTS: SERIES HE/HA
OUTER DIMENSIONS OF INSULATION: MAX. Ø3,2 MM

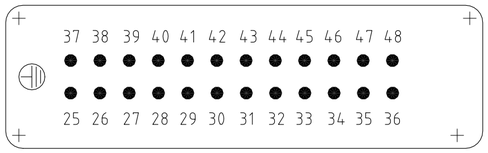2 SUITABLE HOOD SIZE 8; 12: SERIES HB; HD; HIP; EMV
SUITABLE INSERTION AND EXTRACTION TOOL:
SCREWDRIVER 0,5x3 DIN 5264

3 Strip lenght: Screw conection 10mm
Spring clamp conection 10mm Crimp conection 7.5mm

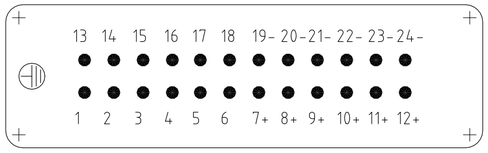4 STANDARDS:
DIN EN 61984; DIN EN 60664-1

5 PACKAGING:
5 SETS IN A CARTON, PRE-MOUNTED

6 SPECIAL PACKAGING: Krauss-Maffei
PACKAGING UNIT: 220 PIECES

| ORDERING TEXT / BESTELLTEXT | OBSOLETE | OBSOLETE | OBSOLETE | OBSOLETE | OBSOLETE | OBSOLETE | SUPERSEDED BY T2040243201-000 | SUPERSEDED BY T2040483201-000 | | | | | | OBSOLETE | | DESCRIPTION / BENNUNG | MATERIAL | COLOR / FARBE | ITEM NO. POS. | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| HE.24.Bu.S.B1.24.KM | | 1 | | | | | | | | | 1 | | | | | Socket contact | | light grey | 5 | earth wire contact with drilings Ø3,3 / without fixing screws |
| HE.24.Bu.C 3,3.B1.24 | | | 1 | | | | 1 | 1 | | | | | | | | Deckel Federklemmversion | | light grey | 4 | |
| HE.24.Bu.SC.AU.B1.24 | | | | | | | | | 1 | 1 | | | | | | Crimp Crimp version | | light grey | 3 | |
| HE.24.Bu.S.T.B.12+6+6 | 1 | | | 1 | 1 | 1 | | | | | | 1 | 1 | 1 | | Cover screw version | | light grey | 2 | |
| HE.24.Bu.S.AU.B25.48 | 1 | | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | | Buchseneinsatz | | light grey | 1 | |
| HE.24.Bu.S.AU.B1.24 | 0-10- | 29- | 31- | 89- | 49- | 57- | 97- | 12- | 92- | 31- | 91- | 71- | 1 | | | | | | | |
| HE.24.Bu.SC.B.25.48 | | | | | | | | | | | | | | | | | | | | |
| HE.24.Bu.SC.B1.24 | | | | | | | | | | | | | | | | | | | | |
| HE.24.Bu.C.B.25.48 | | | | | | | | | | | | | | | | | | | | |
| HE.24.Bu.C B1.24 | | | | | | | | | | | | | | | | | | | | |
| HE.24.Bu.S.B.25.48 | | | | | | | | | | | | | | | | | | | | |
| HE.24.Bu.S.T | | | | | | | | | | | | | | | | | | | | |
| HE.24.Bu.S B1.24 | | | | | | | | | | | | | | | | | | | | |

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:
GENERAL TOLERANCES
in ISO 8015
in ISO 2768-1 m/f/c-E
in DIN 16901-1 fs/g

| | | |
|---|---|---|
| 0 PLC | ± | – |
| 1 PLC | ± | – |
| 2 PLC | ± | – |
| 3 PLC | ± | – |
| 4 PLC | ± | – |
| ANGLES | ± | – |

MATERIAL –

FINISH –

| | | |
|---|---|---|
| DWN | Schneider | 08.02.2000 |
| CHK | Schweiger | 08.02.2000 |
| APVD | – | |
| PRODUCT SPEC | – | |
| APPLICATION SPEC | – | |
| WEIGHT | – | |

TE Connectivity

NAME
Female insert
HE.24.BU.S/C
–

| SIZE | CAGE CODE | DRAWING NO | RESTRICTED TO |
|---|---|---|---|
| A2 | 00779 | C-1103641 | – |

CUSTOMER DRAWING

| SCALE | SHEET | REV |
|---|---|---|
| 1:1 | 1 OF 1 | E6 |

1103641