

BRKT-2

Cable Mounting Bracket

Cable O.D. Range: 1.10-1.50"(28-38mm)

General Instructions

Suggested Installation Equipment (not supplied with kit)

- Electricians tape
-

Safety Instructions

1. Warning: When installing electrical power system accessories, failure to follow applicable personal safety requirements and written installation instructions could result in fire or explosion and serious or fatal injuries.

2. *As Raychem has no control over field conditions which influence product installation, it is understood that the user must take this into account and apply his own experience and expertise when installing product.*

3. The customer is responsible to make the final determination if parts are suitable for their application.


Installation Instructions

1. Attach mounting bracket to pole bracket.

2. Install rubber pad around cable and secure with wraps of vinyl tape. Ends of rubber pad should be towards back of bracket.

Note: Illustrations are for jacketed concentric neutral cables (JCN). Use same technique for unjacketed concentric neutral cables (CN).


Slide bracket around cable. Clamp openings may be manually widened for large cable.

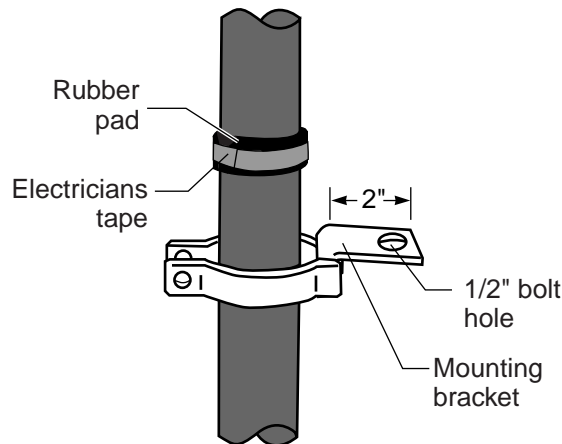

1

3. Position mounting bracket over rubber pad.

4. Insert bolt, install lock washer and tighten nut to securely fasten cable to mounting bracket.

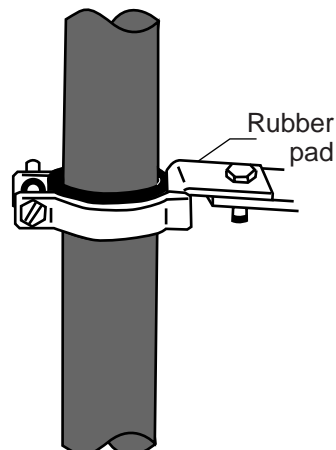

2