

**The extraction tool for HD1 series contact**  
**HD1 シリーズコンタクト用引抜工具**  
**TOOL P/N: 2323787-1**



Fig. 1

**1. はじめに**

本取扱説明書は、HD1シリーズコンタクト及びD1000スリムコンタクトをハウジングから引抜く際に使用する引抜工具(型番2323787-1)の取扱いについて説明するものです。

**作業の前に必ずお読みください。**

**2. 適用製品**

| リセコンタクト型番 | フィメールインサート<br>型番 |
|-----------|------------------|
| 2316670-X | 2312730-2        |
| 2316671-X | 2316316-2        |
| 2367817-X | X-2366515-X      |
| 2367818-X | X-2375948-X      |
|           | X-2423582-X      |
|           | X-2420333-X      |

| タブコンタクト型番 | メイルインサート型番  |
|-----------|-------------|
| 2316663-X | 2312729-2   |
| 2316669-X | 2316315-2   |
| 2367819-X | X-2366600-X |
| 2367820-X | X-2375951-X |
|           | X-2423584-X |
|           | X-2420334-X |

Xには、1桁の数字が入り型番を構成します。  
プリフィックスが 0(ゼロ)の場合は省略されます。

**1. INTRODUCTION**

This Instruction Sheet explains the handling of the extraction tool (P/N 2323787-1) used in case HD1 Series Contact and D1000 slim contact is extracted from a housing.

**READ THIS MANUAL CAREFULLY BEFORE  
OPERATION**

**2. APPLICABLE PRODUCTS**


| Receptacle Contact<br>P/N | Female Insert P/N |
|---------------------------|-------------------|
| 2316670-X                 | 2312730-2         |
| 2316671-X                 | 2316316-2         |
| 2367817-X                 | X-2366515-X       |
| 2367818-X                 | X-2375948-X       |
|                           | X-2423582-X       |
|                           | X-2420333-X       |

| Tab Contact P/N | Male Insert P/N |
|-----------------|-----------------|
| 2316663-X       | 2312729-2       |
| 2316669-X       | 2316315-2       |
| 2367819-X       | X-2366600-X     |
| 2367820-X       | X-2375951-X     |
|                 | X-2423584-X     |
|                 | X-2420334-X     |

"X" means one numeric number. When prefix number is 0(zero), prefix omitted.

### 3. 使用手順

以下の手順でコンタクトを引抜いてください。

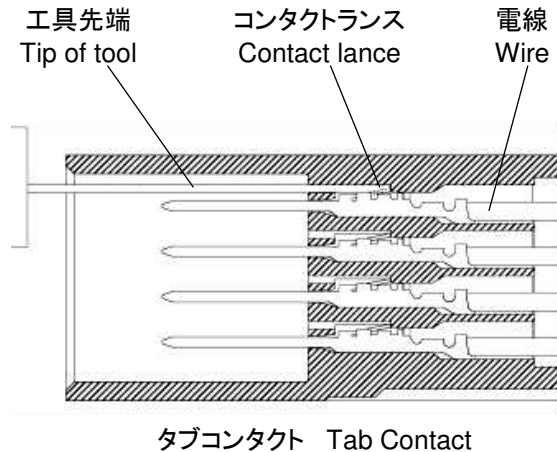

### 3. Extraction Procedure

Extract a contact in the following procedure.

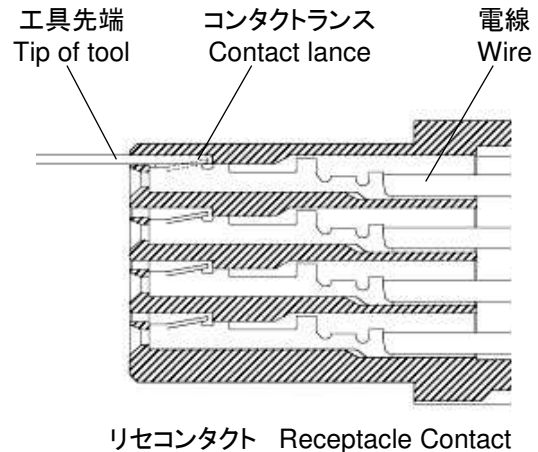


Fig. 2

#### [手順]

- 1) コネクタのかん合側から工具先端が突き当たるまで挿入してください。
- 2) その状態で電線を持ち、コンタクトを引抜いてください。

#### 注記

引抜いたコンタクトを再使用する場合はコンタクトに異常がないか確認し、異常があれば使用しないでください。

工具を挿入するだけでコンタクトのランスは解除されます。工具をこじるとランスや工具を傷めますのでこじらないでください。

コンタクトのかん合部には絶対に工具を挿入しないでください。コンタクトのかん合部に工具を挿入した場合は必ず新しいコンタクトと取り替えてください。

#### [Procedure]

- 1) Insert tool tip from mating side of the connector until it touches and moves the contact lance.
- 2) Hold an electric wire in this condition and extract a contact.

#### Notes

When a case of extracted contact, make sure that there no damage on the contact. If the contact is damaged, do not reuse.

Contact lance could be released by just inserting the extraction tool. Do not apply excess force when you push in the tool into housing. Contact lance and/or tool may be damaged.

Do not insert the extraction tool into contact the contact may be damaged and must be replaced with new one.

Fig2

この書類は当社により変更管理されており、必要に応じ変更されます。

最新の改訂に関しては当社本支店にお問い合わせ下さい。

This TE controlled document is subject to change. For latest revision call local TE representative.