



THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - BY - ALL RIGHTS RESERVED.



REVISIONS						
LOC	DIST	P	LTR	DESCRIPTION	DATE	APVD
-	-	C		REV PER ECO 16-017138	12-22-16	CT EO

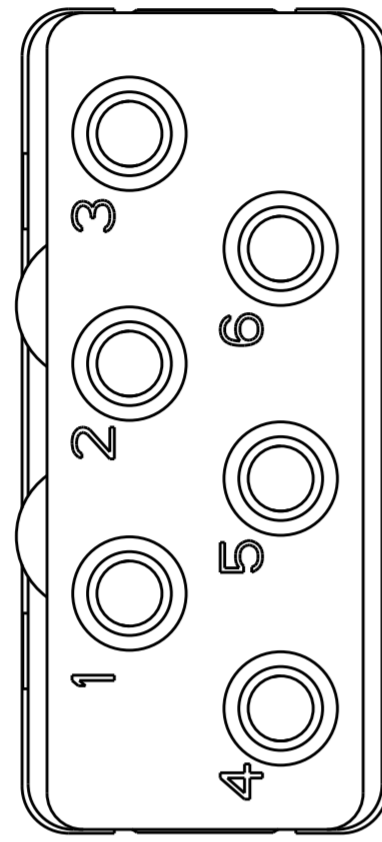

MATING FACE

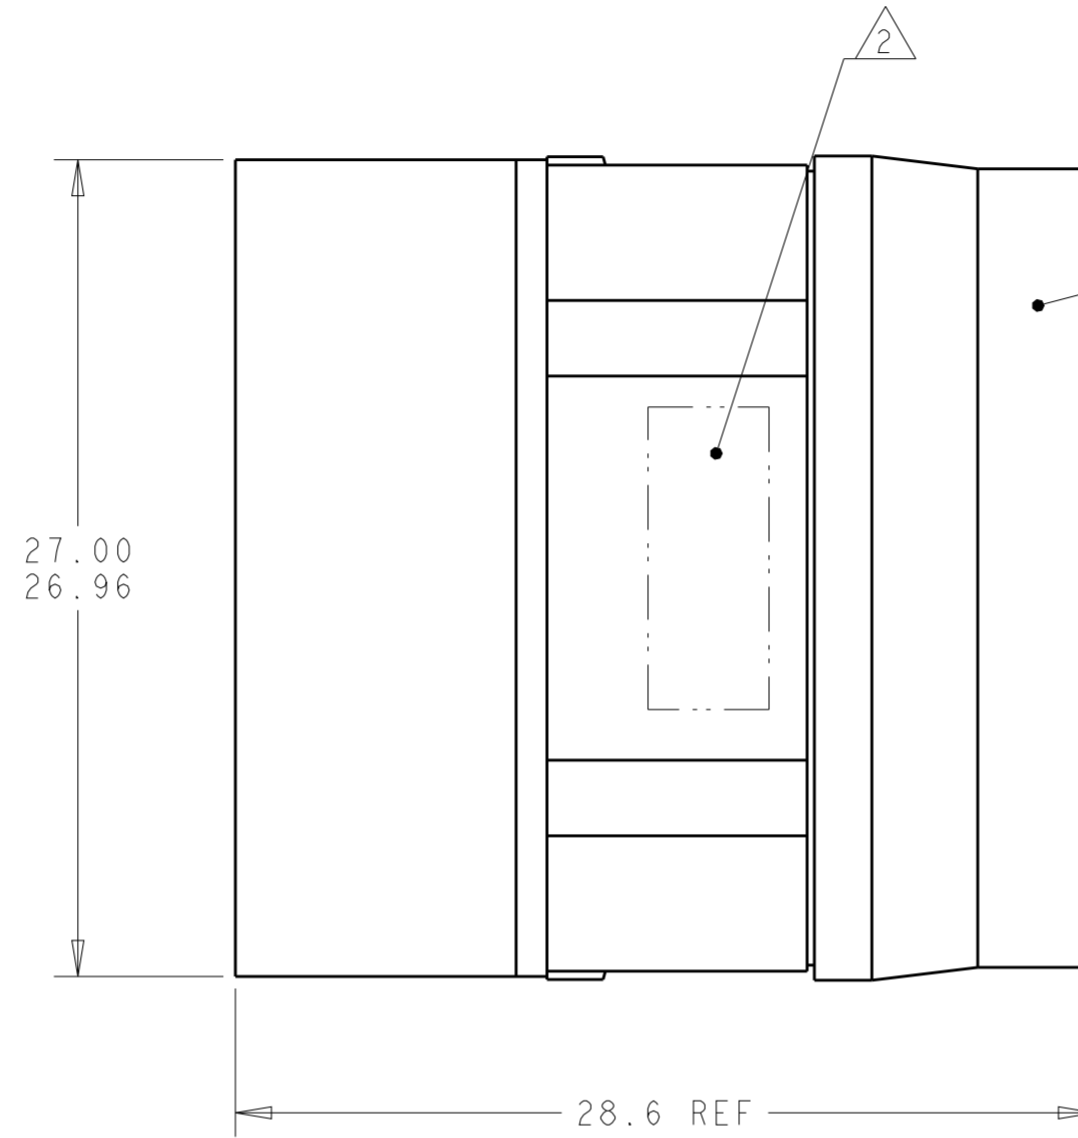

GROMMET
(-1 ONLY)

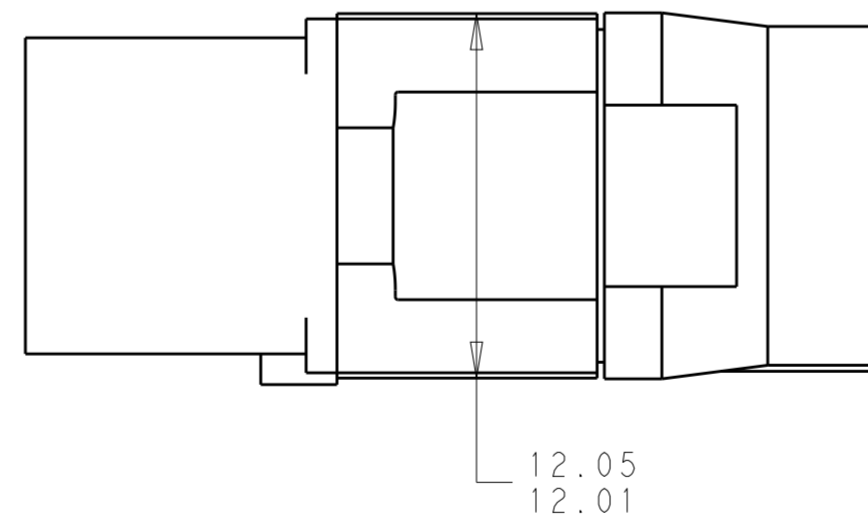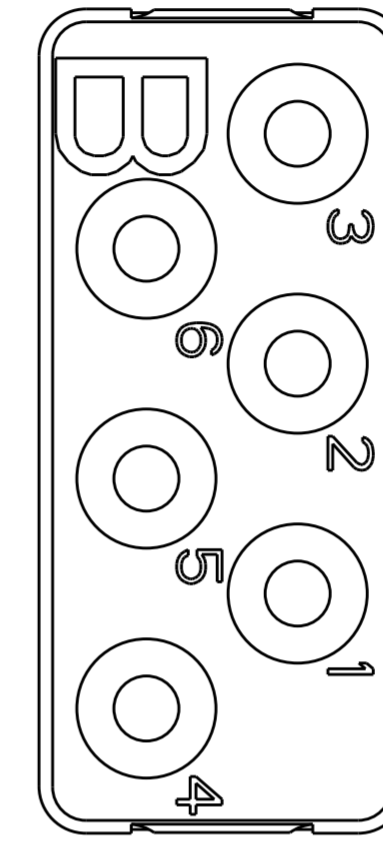

1 FRONT & REAR INSULATOR: HIGH-TEMP THERMOPLASTIC OR THERMOSET EPOXY PER ASTM D5948.
 CONTACT RETENTION CLIPS: STAINLESS STEEL PER AISI 302 OR COPPER ALLOY PER ASTM B194
 REAR GROMMET: FLUROSILICONE ELASTOMER PER MIL-R-25988 B EXCEPT 4.6.6.1.

- 2 PART TO BE MARKED WITH TE IDENTIFICATION, TE PART NO. AND DATE CODE: YEAR & WEEK (YY WW) IN APPROXIMATE AREA SHOWN.
- 3. THIS INSERT CONTAINS: 6 CAVITIES FOR SIZE 12 PIN CONTACTS
- 4. THIS PRODUCT IS SOLD BY TYCO ELECTRONICS UNDER A LICENSE FROM RADIALL SA.

NON-ENV	GPRBN06SB	1738104-2
ENVIRONMENTAL	GPRBE06SB	1738104-1
REMARKS	DESCRIPTIVE PART NO.	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN C.C. THOMAS 10-30-09	TE Connectivity	
DIMENSIONS: mm		CHK K. HOGAN 10-30-09		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD K. HOGAN 10-30-09	NAME INSERT ASSEMBLY, SOCKET, ARRANGEMENT 06, KEY B, GPRB	
0 PLC ±		PRODUCT SPEC	SIZE CAGE CODE DRAWING NO RESTRICTED TO	
1 PLC ±		APPLICATION SPEC	A200779 C-1738104	
2 PLC ±0.05		WEIGHT	SCALE 4:1 SHEET 1 OF 1 REV C	
3 PLC ±		CUSTOMER DRAWING		
4 PLC ±				
ANGLES ±				
FINISH				