
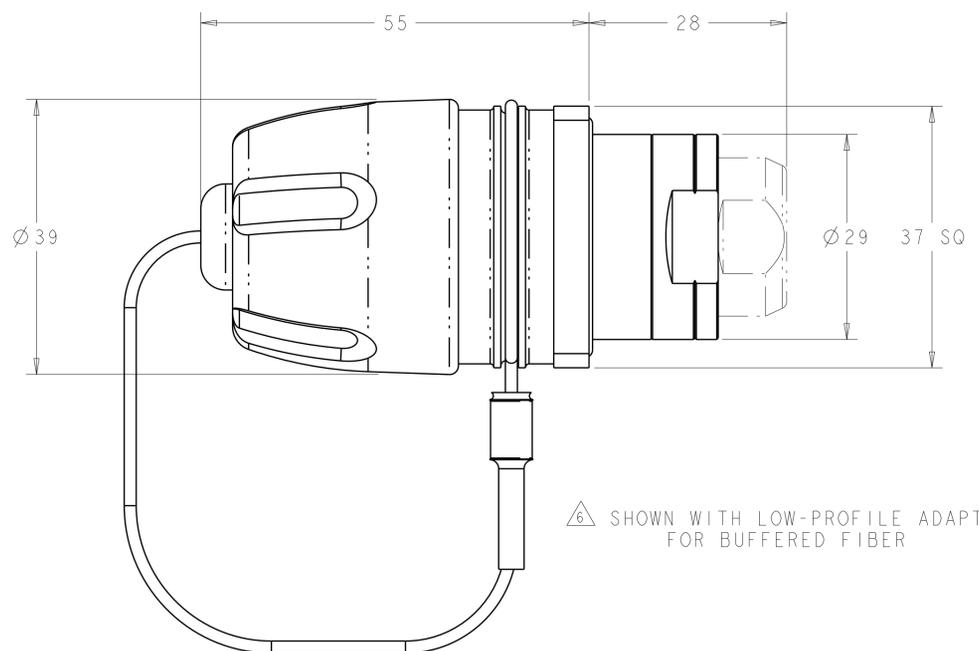
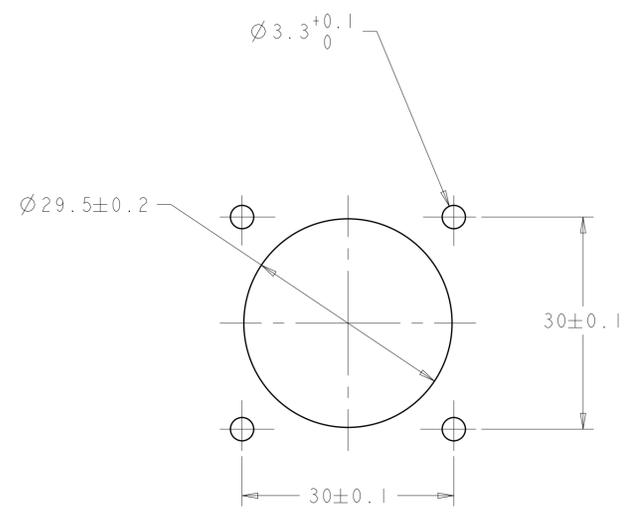


LOC	DIST	REV	DATE	BY	APPV
CE	-	B1	25JUL2013	KG	DW

1. ASSEMBLY SHOWN FOR REFERENCE ONLY. SHIPPED LOOSE PIECE AS SHOWN ON PAGE 2.
2. ALL ASSEMBLY DIMENSIONS ARE FOR REFERENCE ONLY.
3. PANEL THICKNESS SHOULD BE BETWEEN 1mm AND 8.5mm.
4. THIS PRODUCT HAS NOT COMPLETED VALIDATION TESTING.
5. COMPLETE THE CONNECTOR ASSEMBLY BY ADDING EACH OF THE FOLLOWING PRO BEAM SR. KITS:
 - A. EXPANDED BEAM INSERT ASSEMBLY KIT;
 - B. FERRULE KIT, ONE PER FIBER;
 - C. CABLE ADAPTER KIT, SIZED TO THE CABLE JACKET DIAMETER.
6. VIEWS SHOWN WITH CABLE ADAPTER VARIATIONS IN PHANTOM LINES FOR VISUAL AND DIMENSIONAL REFERENCE ONLY. CABLE ADAPTER KITS ARE ORDERED SEPERATELY.

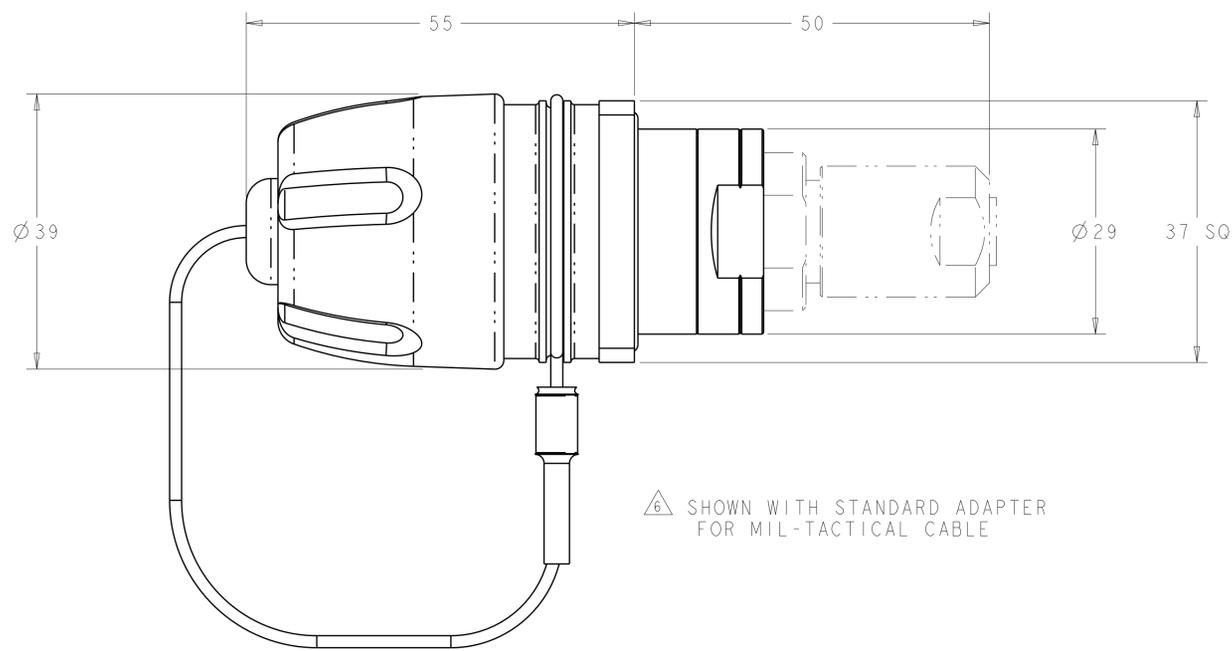


NiAlBrz	1754844-2
ALUMINUM	1754844-1
ALLOY OPTION	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT. DIMENSIONING AND TOLERANCING PER ASME Y14.5M-2009		DWN K. GLATFELT 26 JUL 2004	CHK D. WERTMAN 12 AUG 2004	APVD D. WERTMAN 13 AUG 2004	NAME CONNECTOR SHELL KIT, SO. FLANGE BULKHEAD, PRO BEAM SR.
DIMENSIONS:	TOLERANCES UNLESS OTHERWISE SPECIFIED:	PRODUCT SPEC			APPLICATION SPEC
mm	0 PLC ± 1 PLC ± 2 PLC ± 3 PLC ± 4 PLC ±	MATERIAL			FINISH HARD ANODIZE (ALUMINUM ONLY)
MATERIAL		WEIGHT		SCALE 2:1 SHEET 1 OF 2 REV B1	
CUSTOMER DRAWING		A100779C=1754844		RESTRICTED TO	

LOC		DIST		REVISIONS			
CE	-	P	LTH	DESCRIPTION	DATE	DWN	APVD
		-		SEE SHEET 1	-	-	-

1. SHIPPED LOOSE PIECE AS SHOWN.

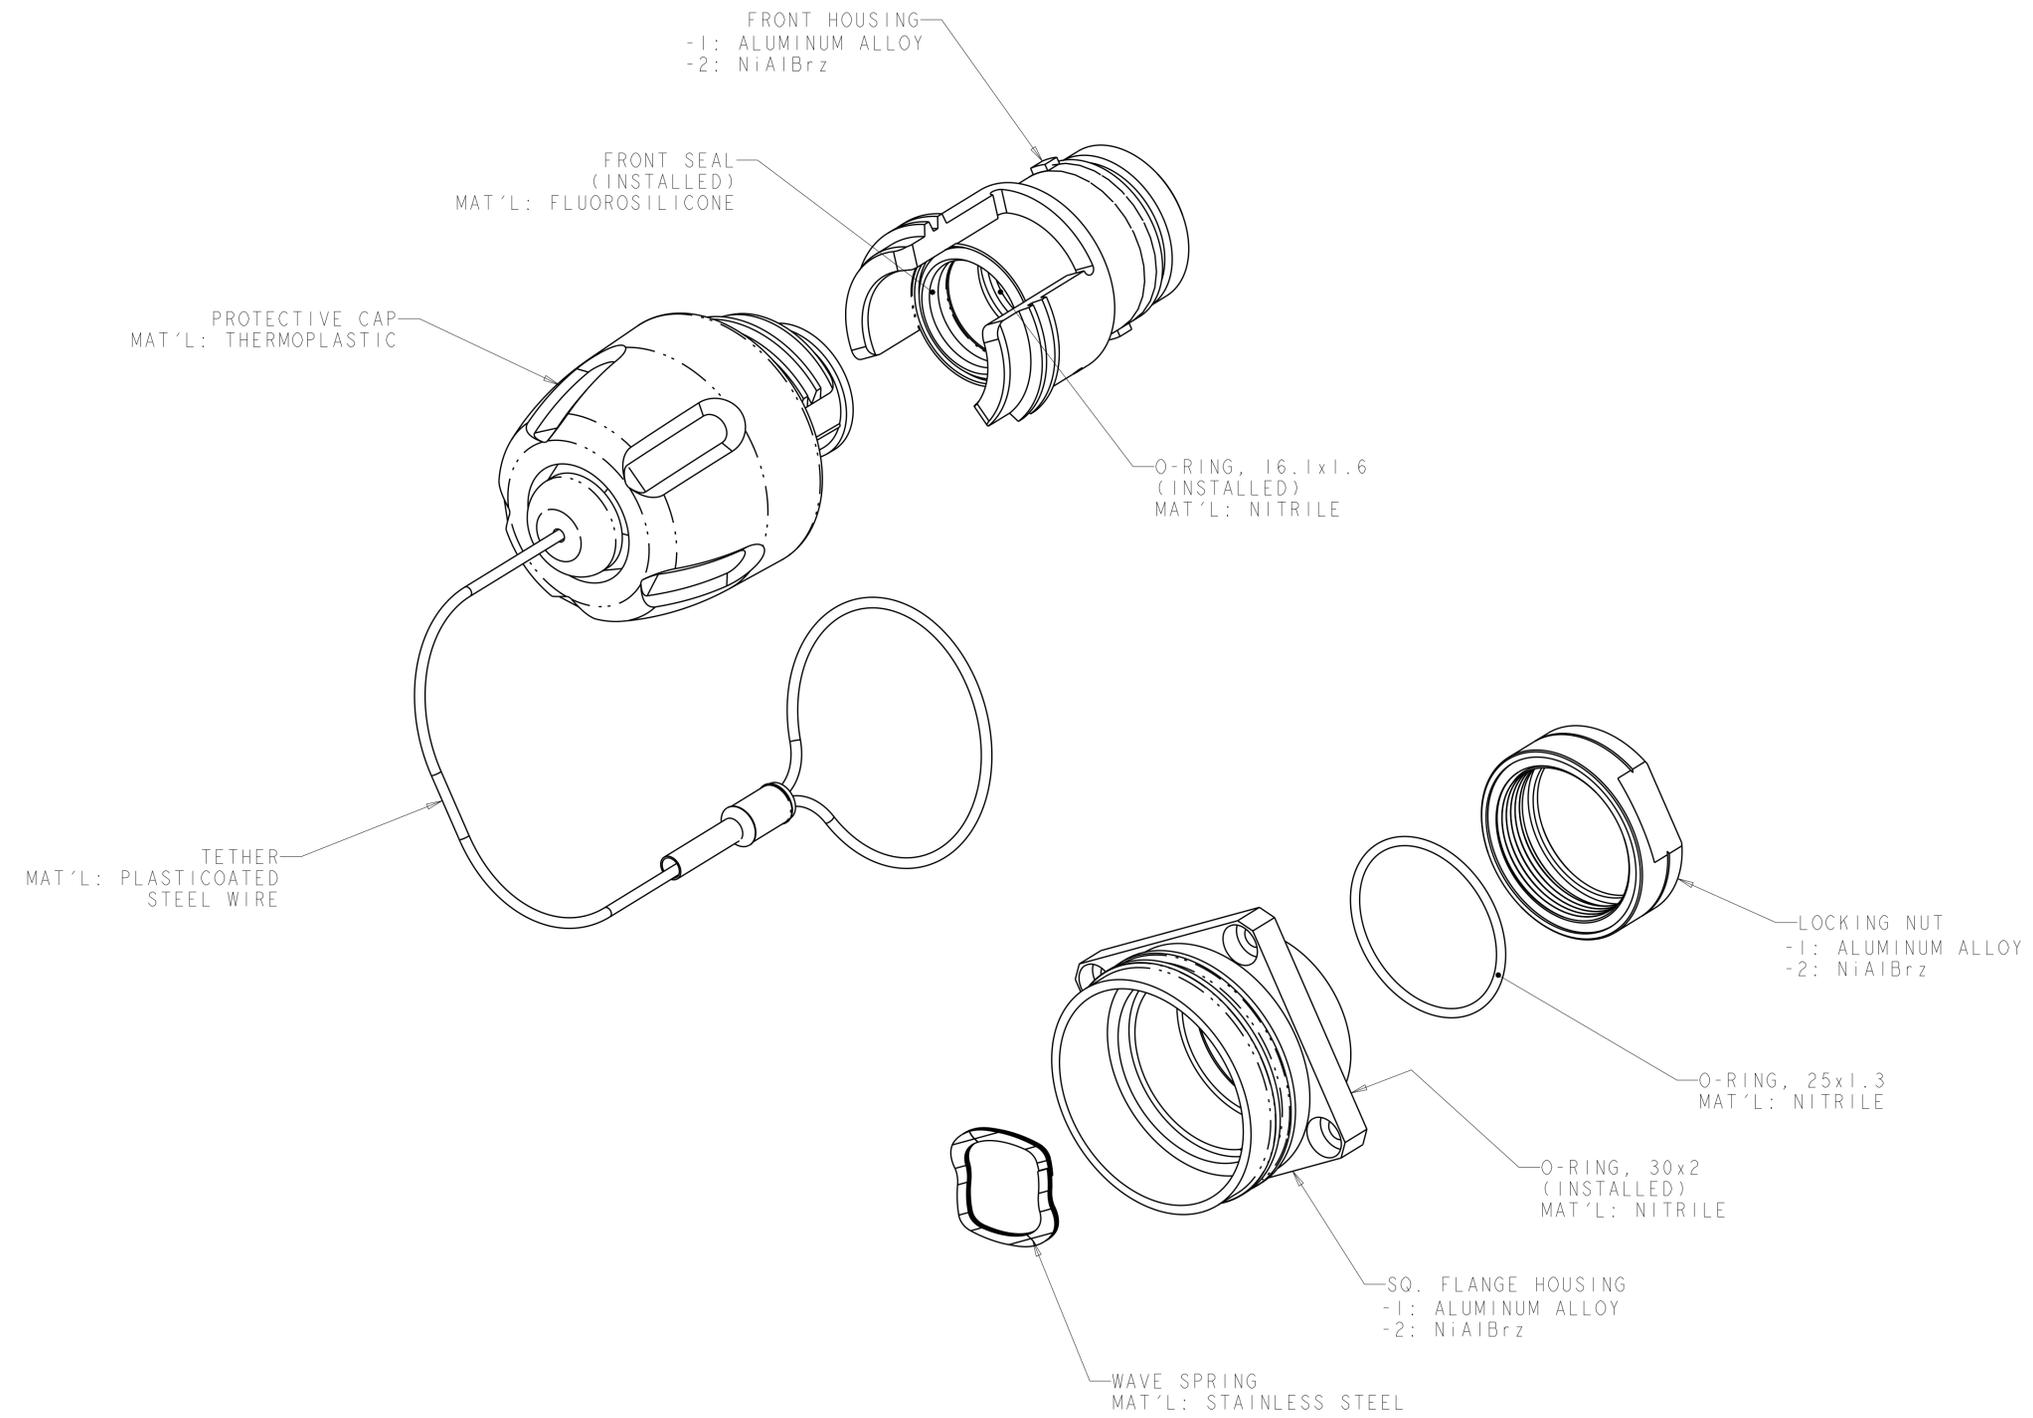

THIS DRAWING IS A CONTROLLED DOCUMENT. DIMENSIONING AND TOLERANCING PER ASME Y14.5M-2009		DWN A. GLATFELT CHK D. WERTMAN APVD D. WERTMAN	26 JUL 2004 12 AUG 2004 13 AUG 2004	TE Connectivity
DIMENSIONS: mm	TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± 1 PLC ± 2 PLC ± 3 PLC ± 4 PLC ± ANGLES ±	PRODUCT SPEC	NAME CONNECTOR SHELL KIT, SQ. FLANGE BULKHEAD, PRO BEAM SR.	
MATERIAL	FINISH HARD ANODIZE (ALUMINUM ONLY)	WEIGHT	SIZE A100779	RESTRICTED TO
CUSTOMER DRAWING		SCALE 1:1	SHEET 2 OF 2	REV B1