


DWG NO 1762422-2

THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.

アッパーアッセイ (UPPER ASSY)
(P/N 2-1762422-2)


CRIMPER WIRE
(P/N 1-1762200-4)
CRIMPER INS
(P/N 1-1762222-4)

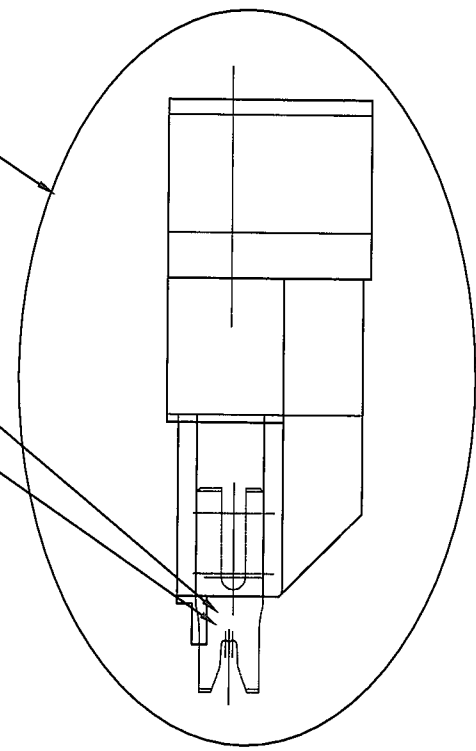

仕様 (Specifications)

- (1) 適用端子 : JST P/N SEH-001T-P0.6
(APPLICABLE TERMINAL)
- (2) 適用ワイヤー : UL1430/AWG22
(APPLICABLE WIRE)
- (3) 圧着規格 : WIRE C/H ±0.05mm
(CRIMP SPEC) INSULATION C/H ±0.1mm
- (4) 外観寸法 : UPPER ASSY W27×H78×D24
(OVERALL) LOWER ASSY W106×H57×D30
- (5) 重量 : UPPER ASSY 0.2kg
(WEIGHT) LOWER ASSY 0.3kg

ANVIL WIRE
(P/N 1-1762290-4)
ANVIL INS
(P/N 1-1762291-4)

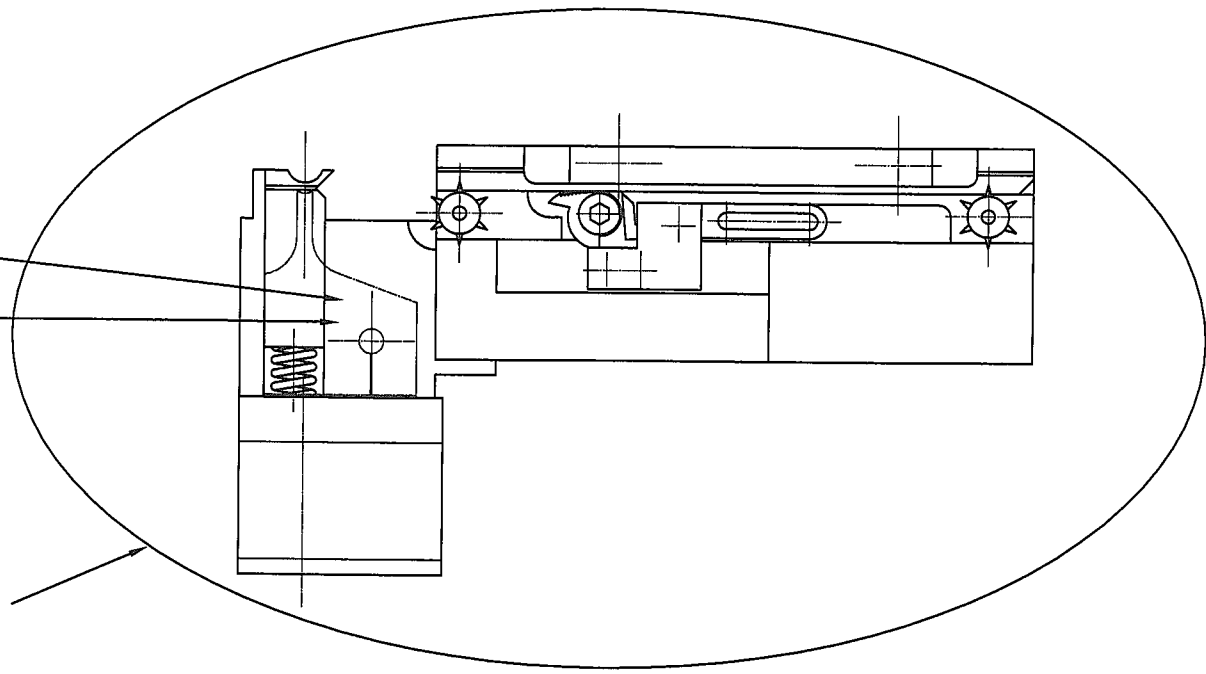

ローワーアッセイ (LOWER ASSY)
(P/N 1-1762422-0)

THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN AMP PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM AMP INCORPORATED, HARRISBURG, PA.

LOC
J
DIST

0	RELEASED	FJCO-0015-05	17 JAN 05	K.M	S.Y	
P	LTR	REVISION RECORD	ECN	DATE	DWN	APVD

THIRD ANGLE PROJECTION.
DIMENSIONS IN MILLIMETERS.
DO NOT SCALE PRINT.

TOLERANCES UNLESS OTHERWISE SPECIFIED.

ANGLES ±0°30'

UP TO 6 ±0.1 120 TO 315 ±0.5
6 TO 30 ±0.2 315 TO 1000 ±0.8
30 TO 120 ±0.3 OVER 1000 ±1.2

REMOVE BURRS, BRAKE SHARP EDGES
R0.4 MAX.

MATERIAL	HEAT TREAT	FINISH
—#—	—#—	—#—
DR 17 JAN 05 K.MARUYAMA	APP 17 JAN 05 S. YABE	Tyco Electronics AMP K.K. Kawasaki, Japan
CHK 17 JAN 05 K.MARUYAMA	REL 17 JAN 05 S. YABE	
名称 (NAME) (S2P APPLICATOR, JST SEH)		
JST SEH スマート2ピースマイクロアプリアケーター		
SCALE	SIZE	DRAWING NO
—#—	A3	1762422-2
SHEET		REV
1 OF 1		0