
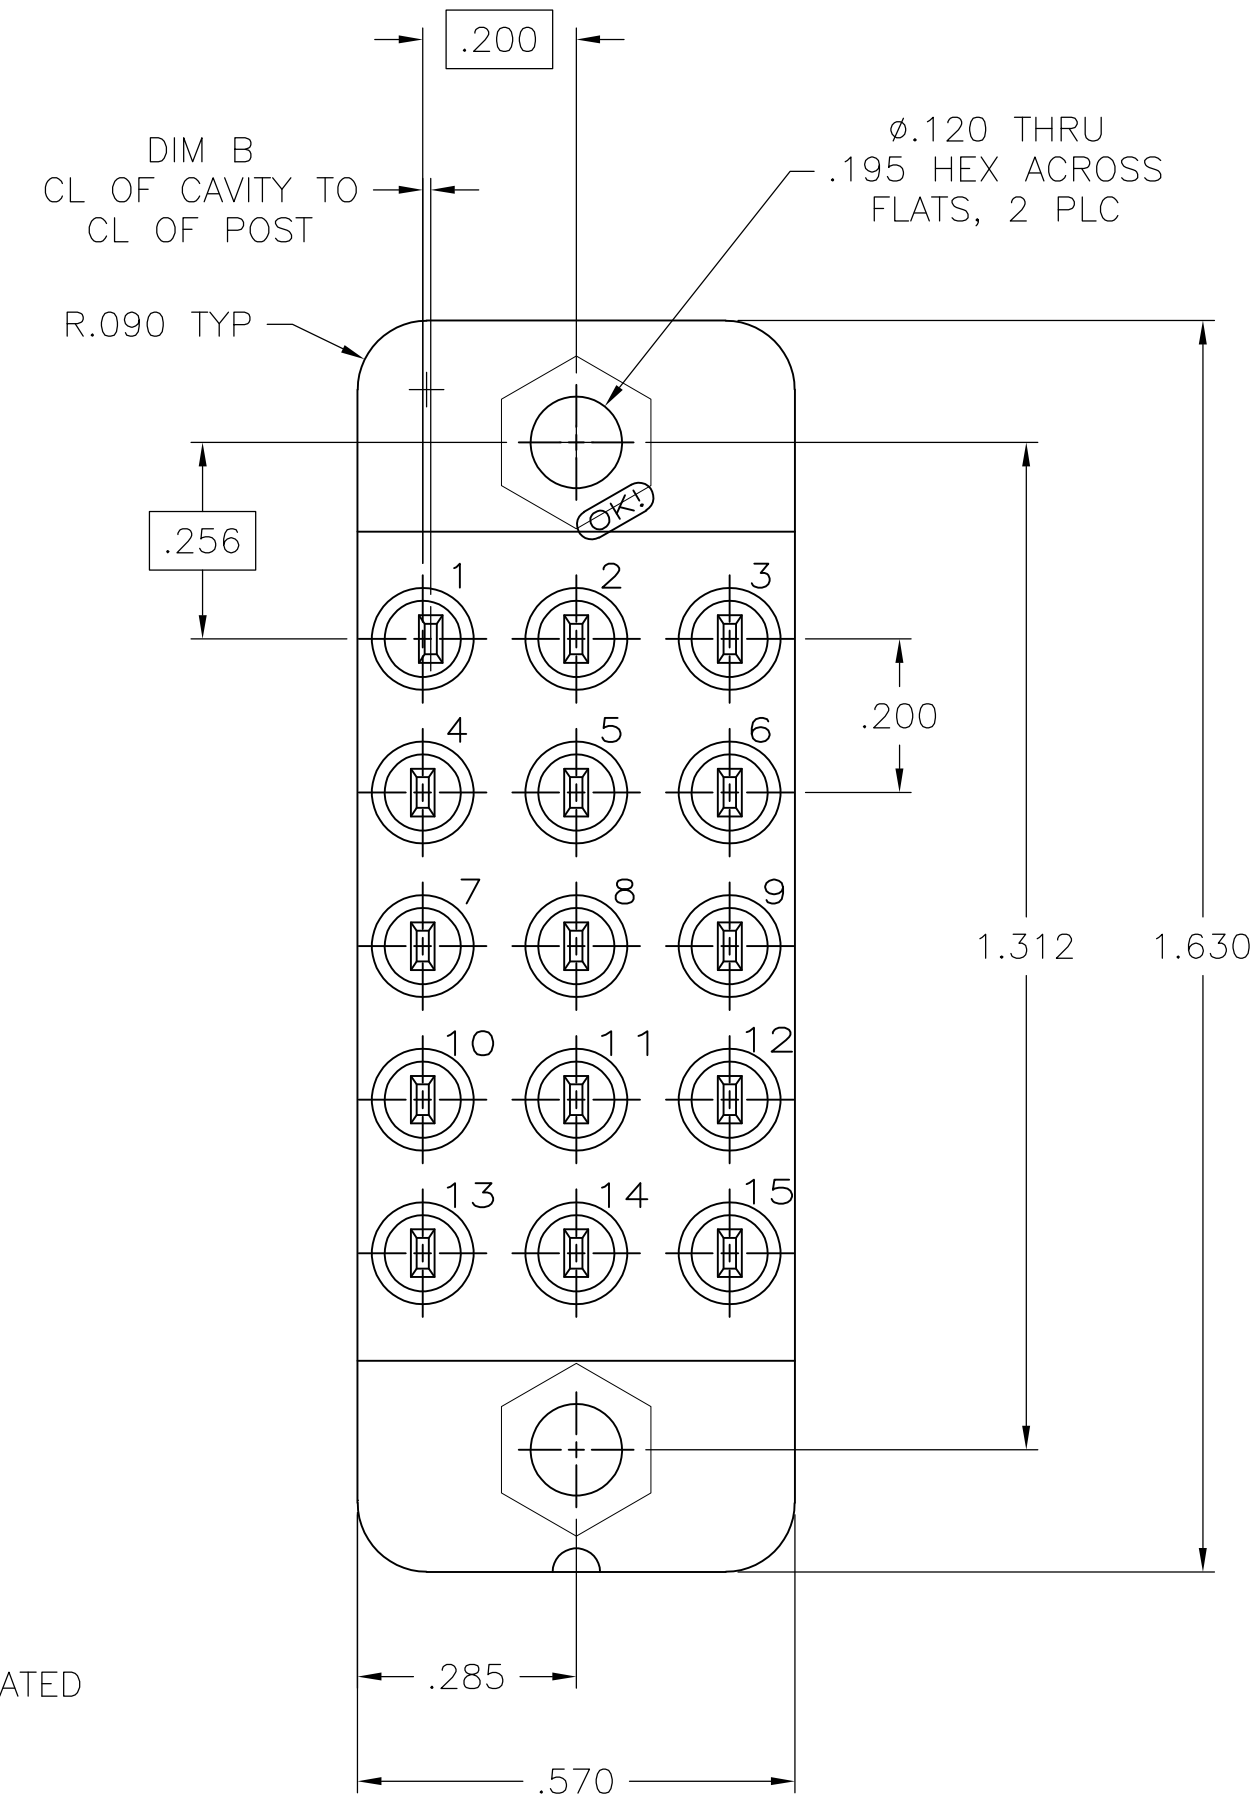


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC		DIST		REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD		
L		REVISED PER ECO-07-010234	5/2/07	SS	GS		
L1		REVISED PER ECO-09-020935	09SEP09	KK	AEG		

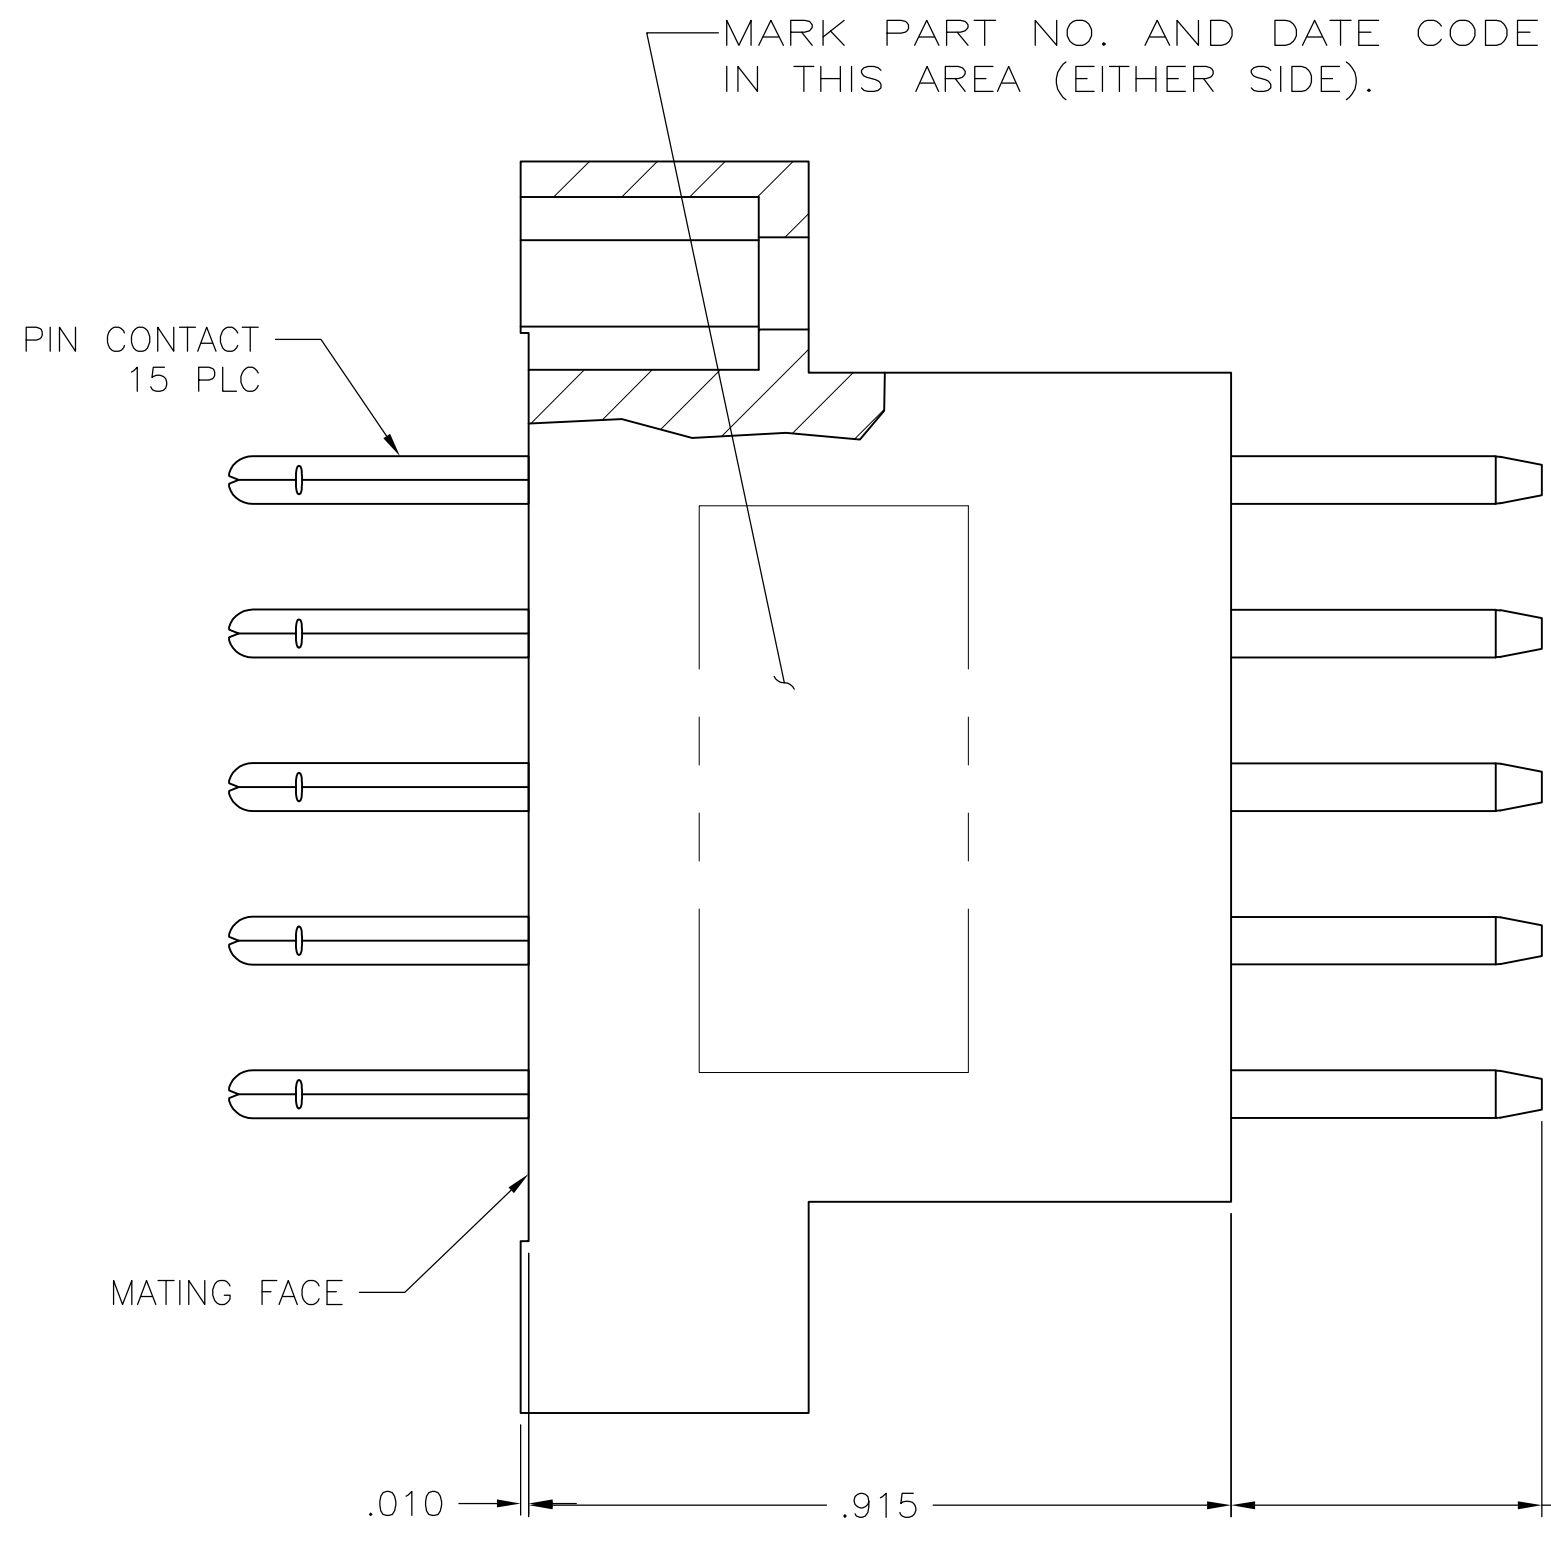

DIM A ±.015 WHEN FULLY SEATED

- MATES WITH 205608 HOUSING.
- CONTACTS ARE AUTOMATICALLY WIREABE.
- FOR PANEL CUT OUT SEE DWG. 205607 CUSTOMER.
- POST LENGTH WILL ACCEPT 3 TERMINATIONS.
- THE MAX. WIRE TO BE USED WITH THIS CONNECTOR IS NO. 24 AWG.
- GOLD PER MIL-G-45204 OVER NICKEL PER QQ-N-290.
- POSTS PLATED TIN-LEAD PER MIL-T-10727 OVER NICKEL PER QQ-N-290.
- POSTS PLATED TIN PER MIL-T-10727 OVER NICKEL PER QQ-N-290.
- OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

POST FINISH	DIM B	DIM A	PART NUMBER
8	.017	.215	205628-5
7	.017	.215	205628-3
7	.000	.810	205628-2
6	.000	.810	205628-1

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN	S SCHLEGEL	4/6/05	Tyco Electronics Corporation Harrisburg, Pa 17105-3608
CHK	G STEINHAEUER	4/6/05	
APVD	G STEINHAEUER	4/6/05	
PRODUCT SPEC			
APPLICATION SPEC			NAME
BLOCK ASSEMBLY, PIN, 15 POSN, AUTOWIRE POST, .200 GRID			RESTRICTED TO
MATERIAL			SIZE
FINISH			CAGE CODE
CUSTOMER DRAWING			DRAWING NO
			SCALE
			SHEET
			OF
			REV
			L1