


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
H	-	A	INITIAL RELEASE	14MAY2014	RC SB

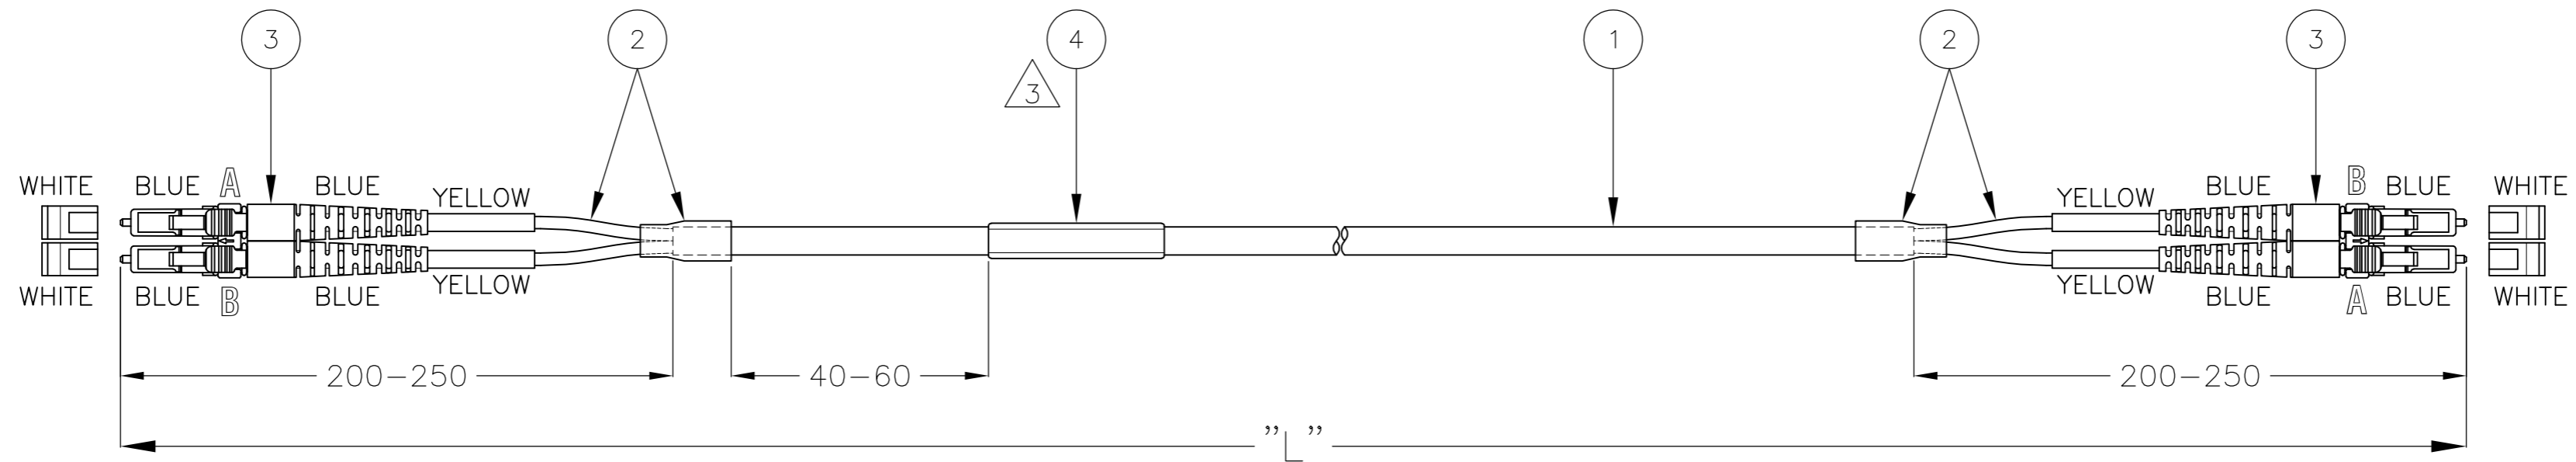

ASSEMBLY CONNECTIVITY	
LC CONN. A	LC CONN. B
LC CONN. B	LC CONN. A

STANDARD LENGTHS ACCORDING TO CUSTOMER DRAWING 1206850	
PART NUMBER	"L" (meter)
X-2061897-Y	XY.0
9-2061897-9	100.0 -0/+3.0
9-2061897-8	150.0 -0/+3.0
9-2061897-7	200.0 -0/+3.0
9-2061897-6	250.0 -0/+3.0
9-2061897-5	300.0 -0/+3.0
9-2061897-4	350.0 -0/+3.0
9-2061897-3	400.0 -0/+3.0
9-2061897-2	450.0 -0/+3.0
9-2061897-1	500.0 -0/+3.0

NOTES:

- 1 MAX. CONNECTOR ATTENUATION 0.3 dB, MEASURED AT 1310 nm AND 1550 nm ACCORDING TO I.E.C. 61300-3-4 INSERTION METHOD B
- 2 MIN. RETURN LOSS 45 dB, IN MATED CONDITION AGAINST REFERENCE CONNECTOR AT 1310 nm AND 1550 nm
- 3 INFORMATION ON LABEL, SEE DETAIL FOR EXAMPLE
 - BARCODE
 - UNIQUE TE SERIAL NUMBER
 - ASSEMBLY LENGTH
 - TE CONNECTIVITY PART NUMBER & ORDER NUMBER
- 4 CABLE INFORMATION:
 - CORE DIAMETER: 9/125 μm (2x)
 - OUTER JACKET DIAMETER: 4.8 mm
 - OUTER JACKET COLOUR: BLACK
 - OUTER JACKET MATERIAL: HALOGEN FREE FLAME RETARDANT
 - CABLE ATTENUATION: 0.40 dB/km @ 1310 nm OR 0.25 dB/km @ 1550 nm

3 LABEL DETAIL:



1	INFORMATION LABEL	4
2	LC DUPLEX CONNECTOR, SINGLE MODE, BLUE	3
2	RUGGIDIZED SUPPORTED FAN OUT, BLACK	2
L	FOCAB Ø4.8 mm, 2FOLD, SINGLE MODE G657A2, BLACK	1
Qty	Description	Item

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R. COOLEN 14MAY2014		
DIMENSIONS: mm		CHK T. DRIJFHOUT 14MAY2014		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD S. BORGAS 14MAY2014	NAME	
0 PLC ± -		PRODUCT SPEC	FIBER OPTIC LEAD 4.8 mm	
1 PLC ± -		APPLICATION SPEC	RUGGED LC/DPX - RUGGED LC/DPX	
2 PLC ± -		WEIGHT	SINGLE MODE G657.A2	
3 PLC ± -		SIZE	CAGE CODE	DRAWING NO
4 PLC ± -		A2	00779	C=2061897
ANGLES ± -		CUSTOMER DRAWING		
FINISH		SCALE	SHEET	REV
		NTS	1 of 1	A