

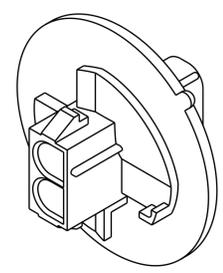


REVISIONS							
LOC	DIST	P	LTN	DESCRIPTION	DATE	DMN	APVD
-	-	2		REVISED PER ECR-17-015922	06NOV2017	BDA	KR

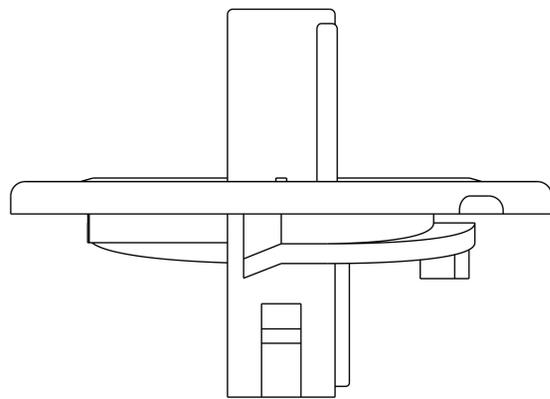




3-DIMENSIONAL MODEL
SCALE 2:1

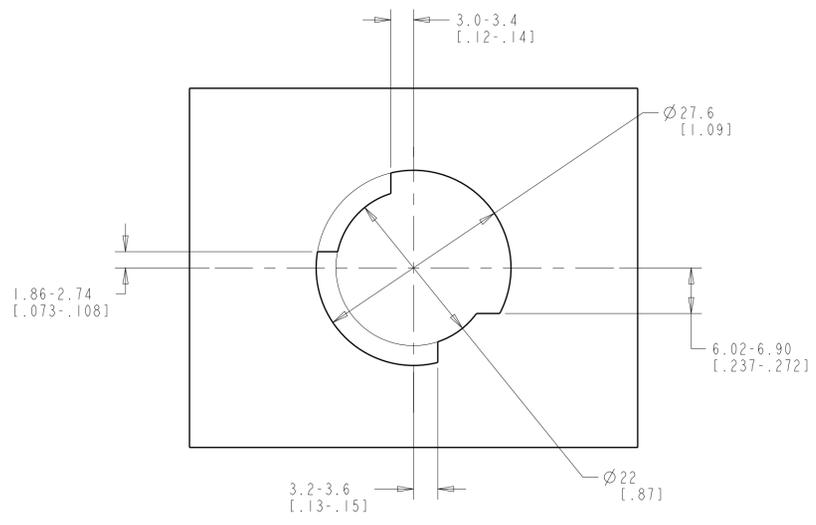

RECOMMENDED CUT OUT
SCALE 2:1

- MATES WITH APPROPRIATE UNIVERSAL MATE-N-LOK™ PLUG.
 - RECOMMENDED PANEL THICKNESS 0.76 - 2.29 [0.030 - .090].
 - PANEL MUST BE PUNCHED SO THAT THE HOUSING ENTERS THE PANEL IN THE SAME DIRECTION AS THE PUNCH.
 - DIMENSIONS SHOWN REPRESENT PRODUCT IN DRY, AS MOLDED, CONDITION. ADDITIONAL 2% GROWTH DUE TO SUBSEQUENT MOISTURE ABSORPTION MAY OCCUR AND SHOULD BE ACCOUNTED FOR.
 - FLAMMABILITY V-2 FOR THICKNESS 0.38mm, 0.75mm, 1.5mm AND 3.0mm PER IEC 60695-11-10.
- ⚠ PA6 - GWT 750, NO FLAME + V2
 ⚠ PA66 - V2
 ⚠ PA6 - GWT 850 + V0

THIS PRINT IS
PRELIMINARY
 UNQUALIFIED PRODUCT
 CONTACT PRODUCT ENGINEERING
 BEFORE USING THIS PRINT

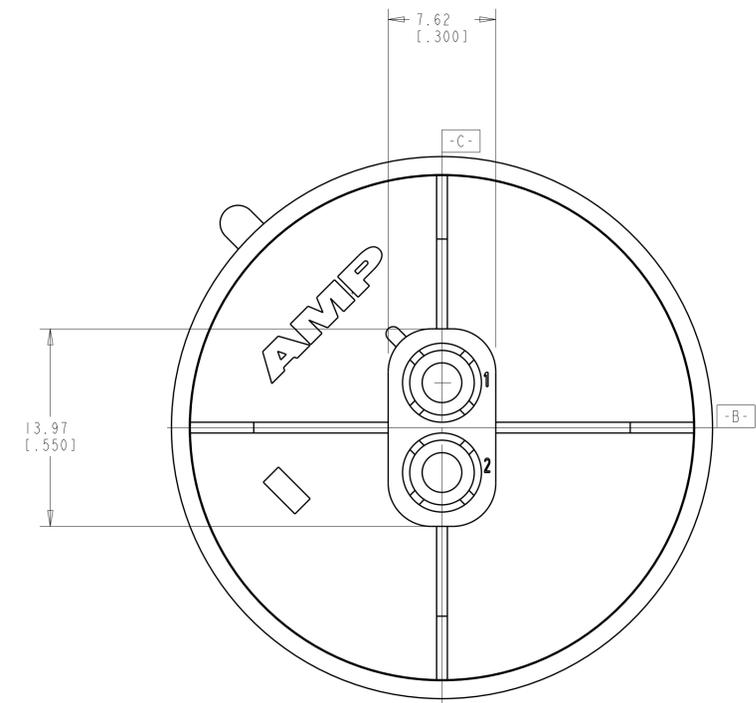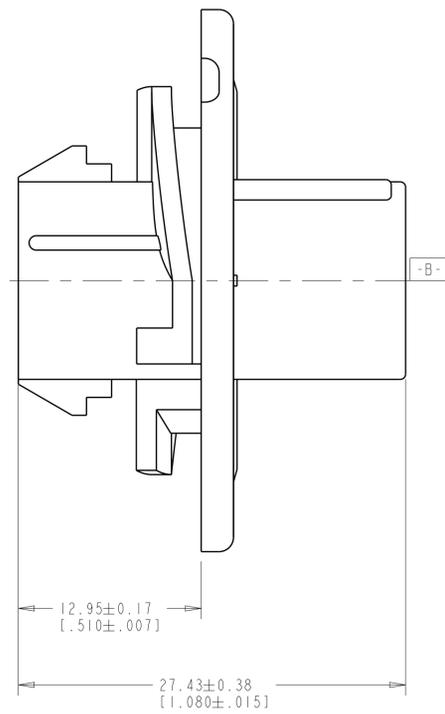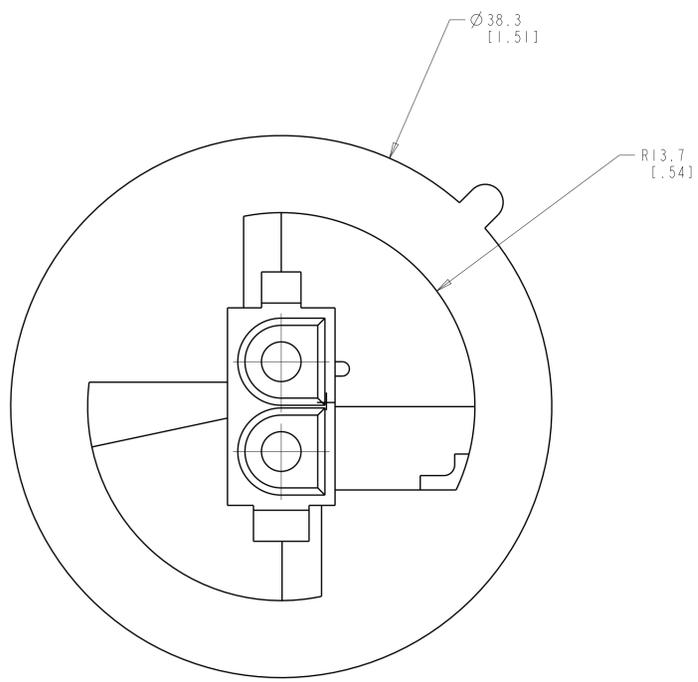

NATURAL	⚠	2178649-3
NATURAL	⚠	2178649-2
NATURAL	⚠	2178649-1
COLOR	MATERIAL	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm [INCHES]
 TOLERANCES UNLESS OTHERWISE SPECIFIED:
 0 PLC ±
 1 PLC ±0.13
 2 PLC ±
 3 PLC ±
 4 PLC ±
 ANGLES ±0° 30'
 FINISH -
 MATERIAL SEE TABLE

DWG: HARTHICK BALAJI 10OCT2013
 CHK: RAJENDRA PAI 03OCT2013
 APVD: 10OCT2013

PRODUCT SPEC
 APPLICATION SPEC
 WEIGHT -
 Customer Drawing

NAME: CAP
 2 CIRCUIT
 UNIVERSAL MATE-N-LOK (TM), SPECIAL

SIZE: A1
 CAGE CODE: 00779
 DRAWING NO: 2178649
 RESTRICTED TO: -

SCALE: 4:1
 SHEET: 1 OF 1
 REV: 2