

4

3


2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION - , - .

© COPYRIGHT - By - ALL RIGHTS RESERVED.

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	N1	REVISED PER ECO-11-004917	11MAR11	RK	HMR
	N2	REVISED PER ECO-17-006294	10OCT2017	RS	DR

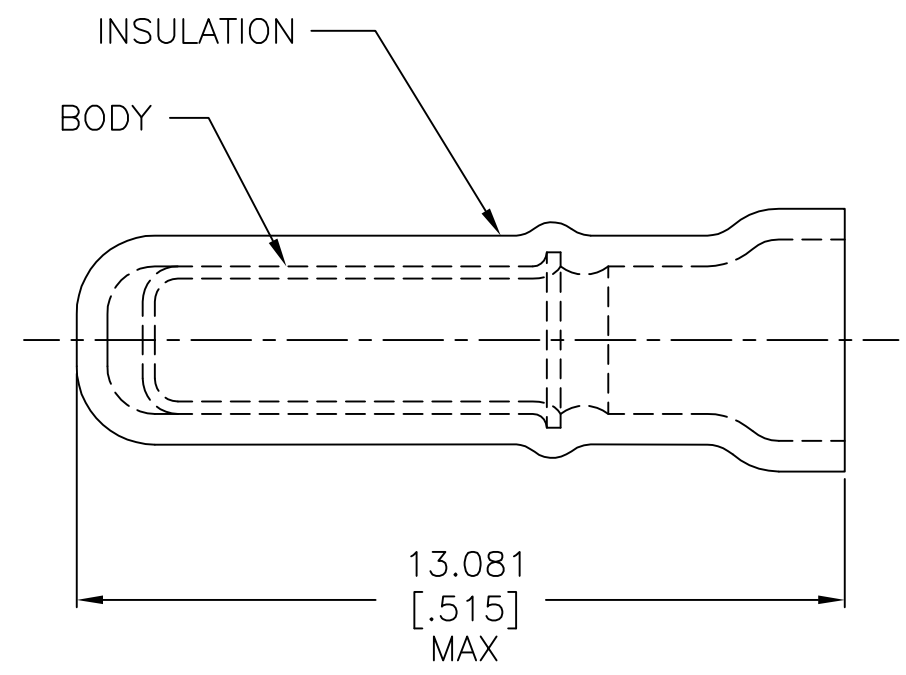

- 1 USE FOR AN UNSTRIPPED (SINGLE) WIRE END ONLY.
- 2 WIRE INSUL, $\phi 1.219-1.905[\phi .048-.075]$

1000	LOOSE PIECE	324484
QTY	PACKAGE TYPE	PART NO

AMP INCORPORATED CUSTOMER SERVICE SYSTEM		MAX RECOMMENDED OPERATING TEMPERATURE: 105°C [221°F]	THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN L OLMEDA 14FEB95	TE Connectivity SPARE WIRE CAP, TRANSPARENT .048-.075 INSULATION																
FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS	PRODUCT INFORMATION CENTER 1-800-522-6752		DIMENSIONS: mm [INCHES]	TOLERANCES UNLESS OTHERWISE SPECIFIED:	CHK M ELLIS 14FEB95					APVD T MICHELUTTI 14FEB95	NAME											
FOR APPLICATION TOOLING INFORMATION	TOOLING ASSISTANCE CENTER 1-800-722-1111	VOLTAGE RATING: -		0 PLC ± -	1 PLC ± -	2 PLC ± -	3 PLC ± 0.127[.005]	4 PLC ± -	ANGLES ± -	APPLICATION SPEC	SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO								
FOR ORDER ENTRY	1-800-526-5142	CIRCULAR MIL AREA: -		MATERIAL BODY, CU PER ASTM B152 INSUL, NYLON, COLOR, TRANSPARENT	FINISH BODY, TIN PLATE PER ASTM B545	WEIGHT	-	A3	00779	C=324484	-	SCALE	8:1	SHEET	1 OF 1	REV	N2					
CUSTOMER DRAWING											SCALE		8:1		SHEET		1 OF 1		REV		N2	