


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 19 .
 © COPYRIGHT 19 BY AMP INCORPORATED. ALL INTERNATIONAL RIGHTS RESERVED.

LOC	DIST	F	ZONE	LTR	REVISIONS	DATE	APPD
G	14	P			REVISED & REDRAWN PER 0720-0303-93	8-30-93	BB

AMP	WIRE RANGE
	8 AWG STRANDED

METRIC
 DIMENSIONS LISTED IN mm [INCHES]

- NOTE:
1. WIRE INSULATION DIA "A" 6.48 [255] MAX
 2. WIRE INSULATION DIA "B" 8.51 [335] MAX

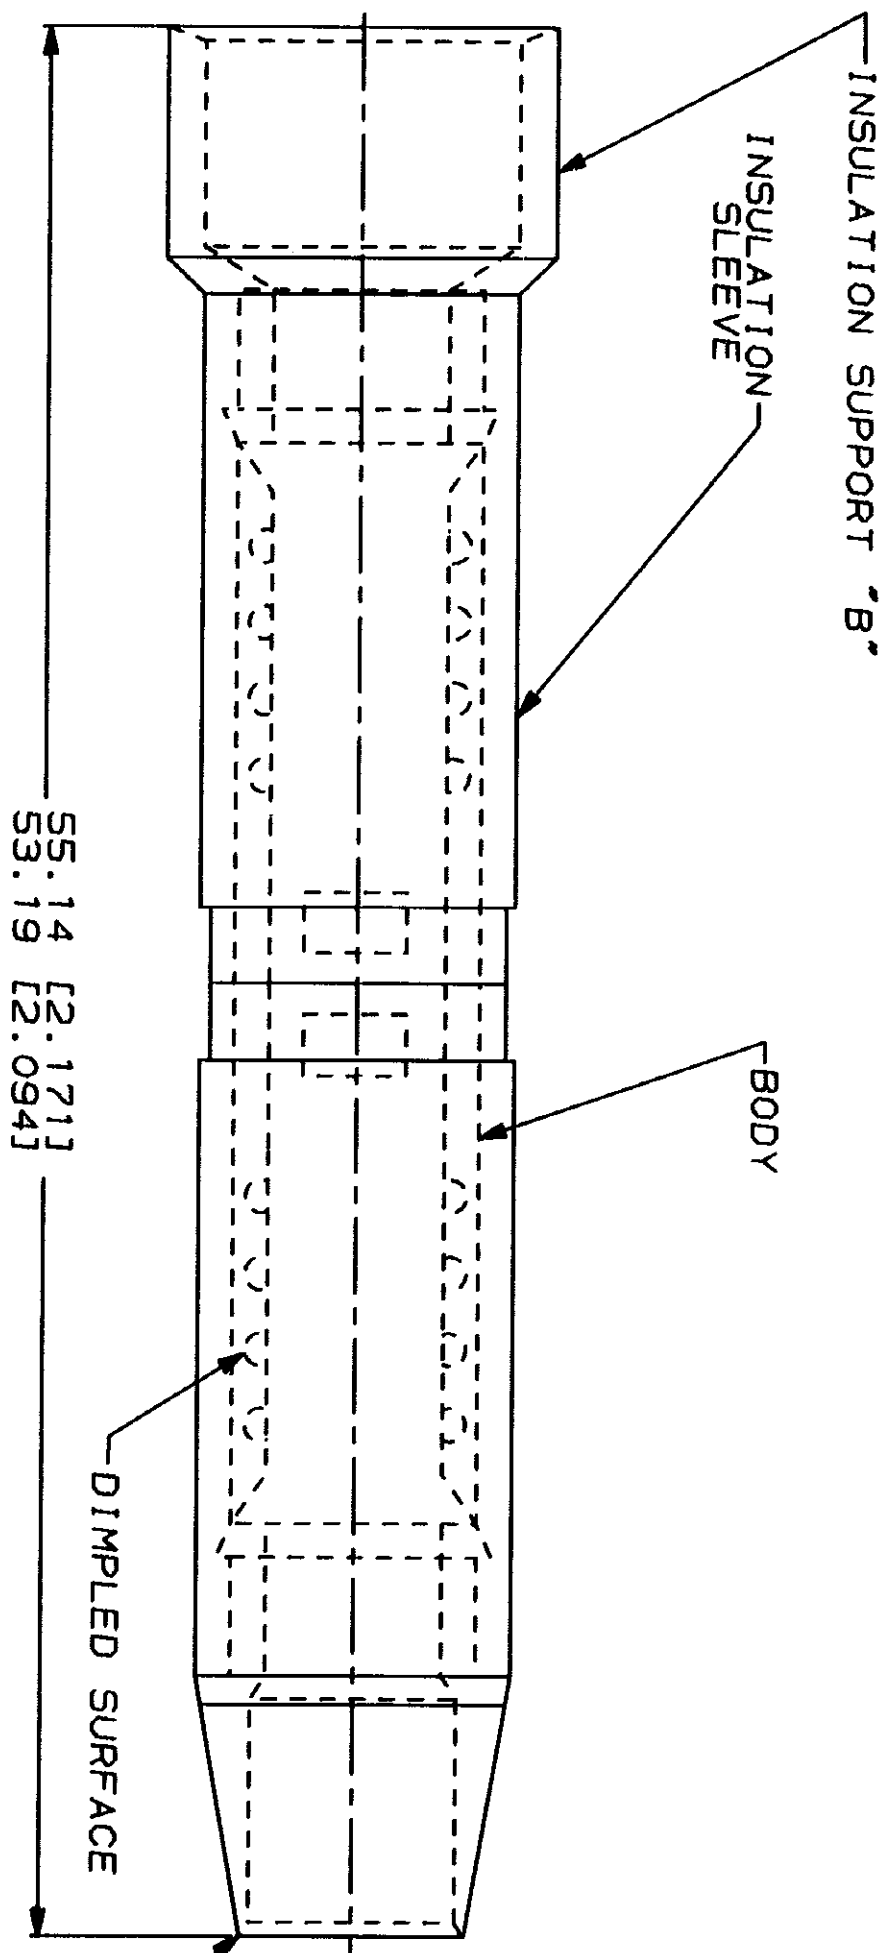

AMP INCORPORATED CUSTOMER SERVICE SYSTEMS		MAX RECOMMENDED OPERATING TEMPERATURE: 105°C		DO NOT SCALE PRINT. UNLESS SPECIFIED		DR 8-30-93 S.S. GOLLSEN		100		LOOSE PC		324658			
FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS		PRODUCT INFORMATION CENTER 1-800-522-6752		VOLTAGE RATING: 600 V MAX		TOLERANCES ON: 1 PLG DEC # 0.20 (0.008) 2 PLG DEC # - 3 PLG DEC # - 4 PLG DEC # - 5 PLG DEC # - MATERIAL		CHK 8-30-93 R. HERBERY		QTY		PACKAGE TYPE		PART NO	
FOR APPLICATION		TOOLING ASSISTANCE CENTER 1-800-722-1111		CIRCULAR MIL AREA: 6.64-10.5mm² (13,100-20,800)		COPPER PER ASTM B-152 MILON, COLOR RED		APPD 8-30-93 M. BLIS		APPLICATION SPEC		NAME		AMP Incorporated Harrisburg, PA 17105-3608	
TOOLING INFORMATION		1-800-526-5142		STRANDED		FINISH		TIN PLATE		PER MIL-T-10727		SCALE		DRAWING NO	
FOR ORDER ENTRY		1-800-526-5142		THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE COMPANY ASSUMES NO LIABILITY FOR ERRORS OR OMISSIONS. REVOLUTION SHOULD BE CONSULTED FOR THE CURRENT VERSION.		APPD 8-30-93 M. BLIS		PRODUCT SPEC		SPLICE, BUTT, SINGLE TO MULTIPLE, TERMINYL, WIRE SIZE: 8 AWG		SIZE		CAGE CODE	
AMP 1400-15 REV 3-92		15:04:32		AMP10744		<UJ12BA>DEPT1132>AMP10744XU.TERMINL-SPLICE-CUST		WEIGHT		NTS		00779		324658	
10 JAN 1994		AMP10744		<UJ12BA>DEPT1132>AMP10744XU.TERMINL-SPLICE-CUST		1 OF 1		CUSTOMER DRAWING		1 OF 1		00779		324658	

CUSTOMER DRAWING