
**Interconnection System, High Pressure, AMPMODU™ Mod I,
with Tin Contacts**

1. Introduction1.1 Purpose

Testing was performed on the High Pressure, AMPMODU™ Mod I Interconnection System with Tin Contacts to determine its conformance to the requirements of AMP® Product Specification 108-25025-1 Rev. O.

1.2 Scope

This report covers the electrical, mechanical, and environmental performance of the High Pressure, AMPMODU Mod I Interconnection System with Tin Contacts manufactured by the Capital Goods Business Unit. The testing was performed between December 14, 1994 and August 18, 1995.

1.3 Conclusion

The High Pressure, AMPMODU Mod I Interconnection System with Tin Contacts, listed in paragraph 1.5, meet the electrical, mechanical, and environmental performance requirements of AMP Product Specification 108-25025-1 Rev O.

1.4 Product Description

The High Pressure, AMPMODU Mod I Interconnection system with tin contacts is a two piece configuration of which the receptacle may be mounted directly on a printed circuit board or snapped into a flame retardant housing. The receptacles are tin plated phosphor bronze. The posts are tin plated brass. The housings are Nylon 6/6, UL94V-0.

1.5 Test Samples

The test samples were randomly selected from normal current production lots, and the following part numbers were used for test:

<u>Test Group</u>	<u>Quantity</u>	<u>Part Nbr</u>	<u>Description</u>
1,2,3	211	102104-3	Crimp/snap contact with AWG 18 wire
1	3	87160-4	2 Position Header
1	3	2-87025-5	2 Position Housing
1,2,3	13	87160-1	5 Position Header
3	6	2-87025-3	5 Position Housing
1,2	7	2-87160-0	20 Position Header
1,2	7	5-87025-0	25 Position Housing

1.6 Qualification Test Sequence

Test or Examination	Test Groups		
	1	2	3
Examination of Product	1,9	1,6	1,8
Termination Resistance, Dry Circuit	3,7	2,5	
Dielectric Withstanding Voltage			3,7
Insulation Resistance			2,6
Vibration	5		
Physical Shock	6		
Mating Force	2		
Unmating Force	8		
Durability	4		
Thermal Shock			4
Humidity -Temperature Cycling		3(a)	5
Temperature Life		4	

The numbers indicate sequence in which tests were performed.

(a) Precondition with 10 cycles of Durability

2. Summary of Testing

2.1 Examination of Product - All Groups

All samples submitted for testing were randomly selected from current production lots. A Certificate of Conformance was issued by the Product Assurance Department of the Capital Goods Business Unit. Where specified, samples were visually examined and no evidence of physical damage detrimental to product performance was observed.

2.2 Termination Resistance, Dry Circuit - Groups 1,2

All termination resistance measurements, taken at 100 milliamperes DC and 20 millivolts open circuit voltage were less than 12 milliohms.

2.3 Dielectric Withstanding Voltage - Group 3

No dielectric breakdown or flashover occurred.

2.4 Insulation Resistance - Group 3

All insulation resistance measurements were greater than 5,000 megohms.

2.5 Vibration - Group 1

No discontinuities were detected during vibration. Following vibration, no cracks, breaks, or loose parts on the connector assemblies were visible.

2.6 Physical Shock - Group 1

No discontinuities were detected during physical shock. Following physical shock testing, no cracks, breaks, or loose parts on the connector assemblies were visible.

2.7 Mating Force - Group 1

All mating force measurements were less than 60 ounces maximum average per contact.

2.8 Unmating Force - Group 1

All unmating force measurements were greater than 3 ounces minimum average per contact.

2.9 Durability - Group 1

No physical damage occurred to the samples as a result of mating and unmating the connector 50 times.

2.10 Thermal Shock - Group 3

No evidence of physical damage was visible as a result of exposure to thermal shock.

2.11 Humidity-Temperature Cycling - Groups 2,3

No evidence of physical damage was visible as a result of exposure to humidity-temperature cycling.

2.12 Temperature Life - Group 2

No evidence of physical damage was visible as a result of exposure to an elevated temperature.

3. Test Methods

3.1 Examination of Product

Where specified, samples were visually examined for evidence of physical damage detrimental to product performance.

3.2 Termination Resistance, Low Level

Termination resistance measurements at low level current were made using a four terminal measuring technique (Figure 1). The test current was maintained at 100 milliamperes DC with a 20 millivolt open circuit voltage.

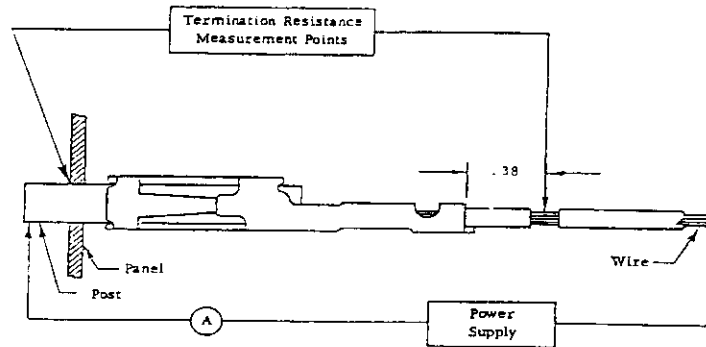


Figure 1
Typical Termination Resistance Measurement Points

3.3 Dielectric Withstanding Voltage

A test potential of 1200 volts AC was applied between the adjacent contacts. This potential was applied for one minute and then returned to zero.

3.4 Insulation Resistance

Insulation resistance was measured between adjacent contacts, using a test voltage of 500 volts DC. This voltage was applied for two minutes before the resistance was measured.

3.5 Vibration, Sine

Mated samples were subjected to sinusoidal vibration, having a simple harmonic motion with an amplitude of 0.06 inch, double amplitude or 10 gravity units (G's) whichever is less. The vibration frequency was varied logarithmically between the limits of 10 and 500 Hz and returned to 10 Hz in 15 minutes. This cycle was performed 12 times in each of three mutually perpendicular planes for a total vibration time of 9 hours. Connectors were monitored for discontinuities of one microsecond or greater, using a current of 100 milliamperes DC in the monitoring circuit.

3.6 Physical Shock

Mated connectors were subjected to a physical shock test, having a half-sine waveform of 50 gravity units (g peak) and a duration of 11 milliseconds. Three shocks in each direction were applied along the three mutually perpendicular planes, for a total of 18 shocks. Connectors were monitored for discontinuities of one microsecond or greater, using a current of 100 milliamperes DC.

3.7 Mating Force

The force required to mate individual connectors was measured using a tensile/compression device with the rate of travel at 0.5 inch/minute and a free floating fixture.

3.8 Unmating Force

The force required to unmate individual connectors was measured using a tensile/compression device with the rate of travel at 0.5 inch/minute and a free floating fixture.

3.9 Durability

Connectors were mated and unmated 25 times at a rate of 500 cycles per hour.

3.10 Thermal Shock

Mated connectors were subjected to 5 cycles of temperature extremes with each cycle consisting of 30 minutes at each temperature. The temperature extremes were -65 and 60°C. The transition between temperatures was less than one minute.

3.11 Humidity-Temperature Cycling

Mated connectors were exposed to 10 cycles of humidity-temperature cycling. Each cycle lasted 24 hours and consisted of cycling the temperature between 25°C and 65°C twice while the relative humidity was held at 95%. (Figure 2)

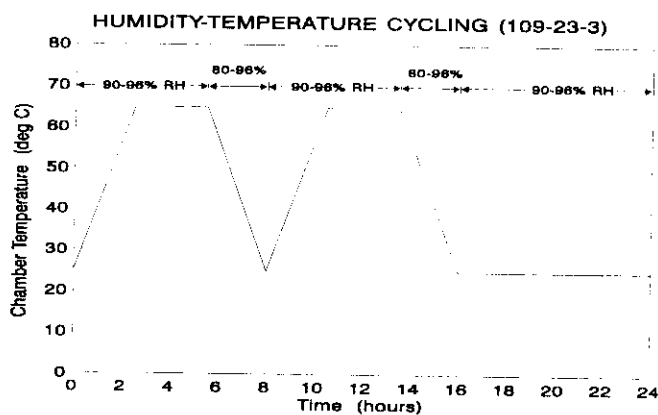


Figure 2
Typical Humidity-Temperature Cycling Profile

3.11 Temperature Life

Mated samples were exposed to a temperature of 105°C for 500 hours.


4. Validation

Prepared by:


_____ 515196


Terrance M. Shingara
Test Engineer
Product Qualification Team
Americas Regional Laboratory

Reviewed by:


_____ 511696

Robert S. Druckenmiller
Supervisor
Product Testing
Americas Regional Laboratory

Approved by:


_____ 512576

Edward Gill
Manager
Engineering & Design Assurance
Capital Goods Business Unit