


PART NUMBER	REV	FIRST USED	USED ON DESC.
567200-2	AM	565435-5	K TERMINATOR
567200-3	AM	354500-5	G TERMINATOR, 3/5K
567200-4	AM	1338600-2	M TERMINATOR
567200-5	AM	1-471273-3	K TERMINATOR

SUPERSEDED BY 567200-3
 OBSOLETE
 OBSOLETE

LOC	DIST	REV	DATE	OWN	APVD
A	66	AL	04MAY2009	MY	GB
		AM	02FEB2010	MY	GB
		AM1	11JAN2018	FZ	KZ
		AM2	28FEB2024	GK	TE

Printed on 28-Feb-2024 08:21 (incl. a Standard Time) from TCE56483

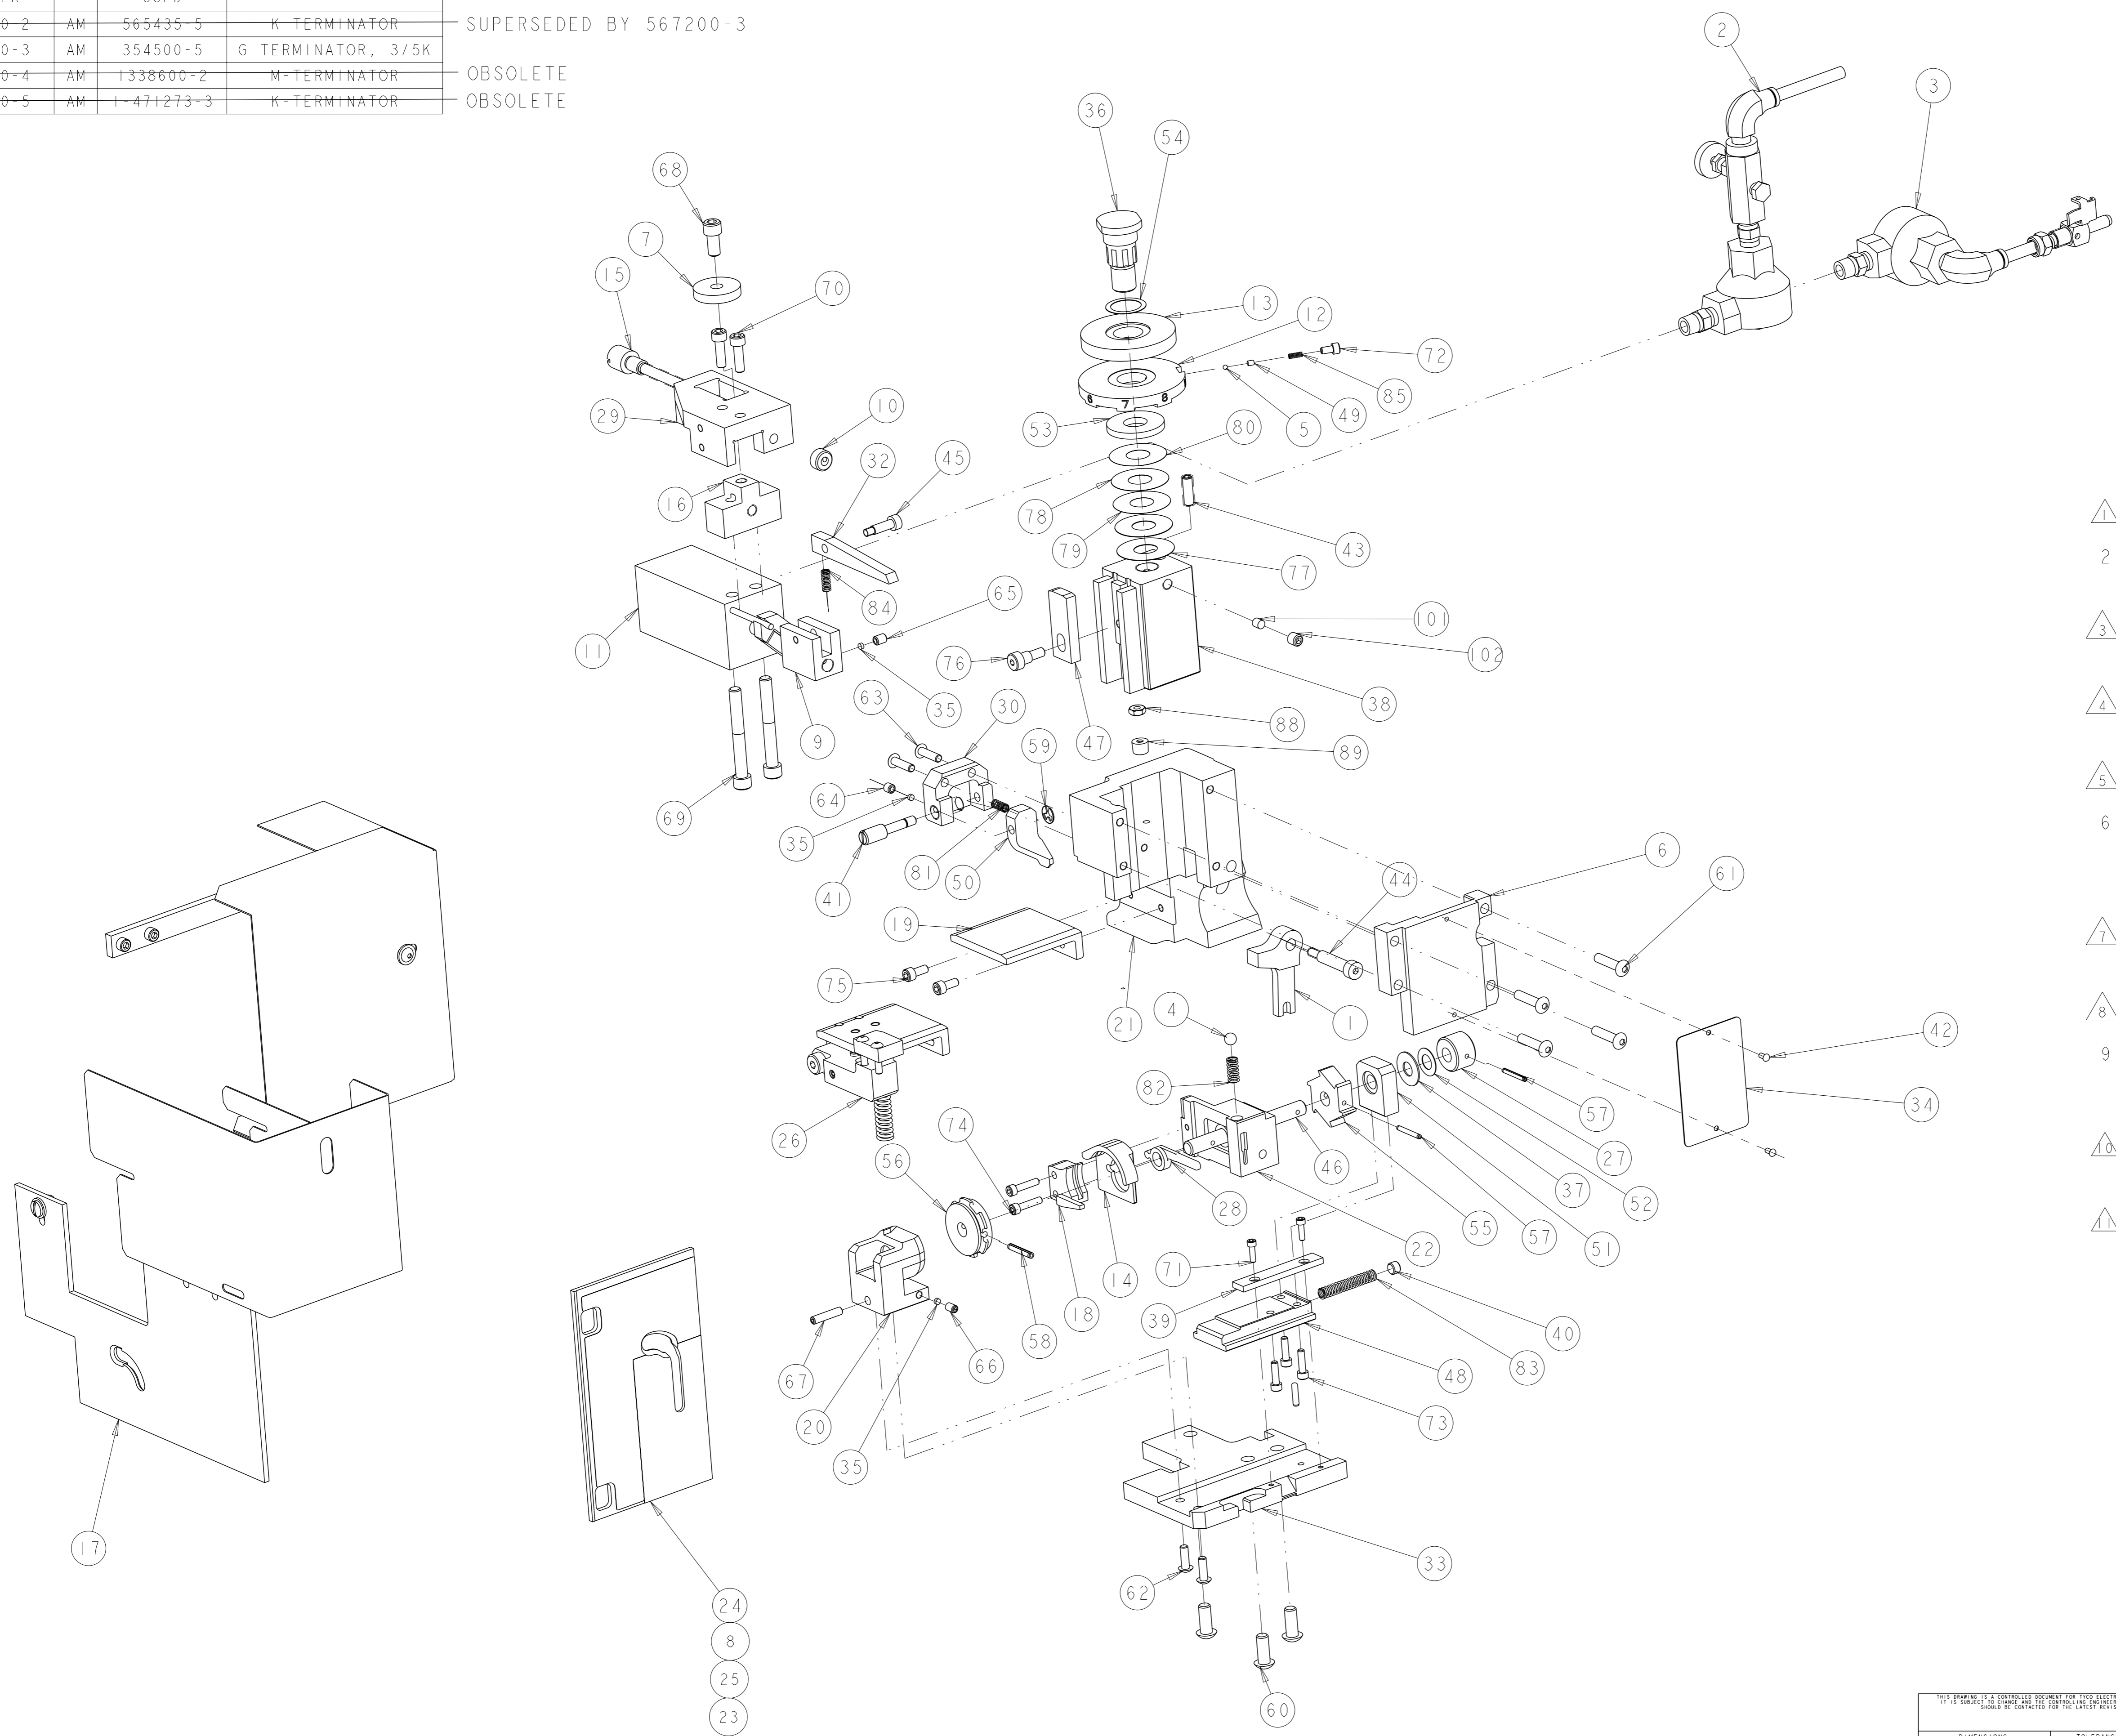

- ▲ LUBRICATE DAILY USING NO. 20 MACHINE OIL.
- 2. CONTACT THE TOOLING ASSISTANCE CENTER (800) 722-1111 FOR APPLICABLE DIE SETS.
- ▲ GREASE LIGHTLY (4 CORNERS OF APPLICATOR HOUSING).
- ▲ USE IN COMBINATION TO SET PROPER CRIMP HEIGHT.
- ▲ ITEM NOT SHOWN ON ASSEMBLY.
- 6. REFER TO THE TERMINATOR CUSTOMER MANUAL FOR INSTRUCTIONS ON HOW TO RECONFIGURE THE TERMINATOR BASE PLATE CLAMPS FOR TAPE FEED APPLICATORS.
- ▲ REMOVE ITEMS WHEN USING TERMINAL PART NUMBER 696405-2.
- ▲ APPLY ITEM 86 TO ITEM 43.
- 9. REFER TO INSTRUCTION SHEET AI-8082 (408-8082) FOR CONNECTING AIR FEED CYLINDER TO AIR FEED VALVE.
- ▲ GUARD MUST BE IN PLACE WHEN OPERATING APPLICATOR IN BENCH MACHINE.
- ▲ SEE ASSEMBLY DRAWING FOR COMPONENTS.

SCALE 11:20

DIMENSIONS: IN		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± 1 PLC ± 2 PLC ± 3 PLC ± 4 PLC ± ANGLES ±		DWG: K. STAKEM 15FEB2007 CHK: T. ELBIN 15FEB2007 APVD: T. ELBIN 15FEB2007		NAME: Quick Change Appl, Side Feed PIDG & PG 22-18, 16-14, 12-10	
MATERIAL:		FINISH:		SIZE: 114-2157 WEIGHT:		CAGE CODE: 00779 DRAWING NO: 567200	
CUSTOMER ACCESSIBLE PRODUCTION DRAWING				SCALE: 1:12		SHEET 1 OF 2 REV AM2	

