

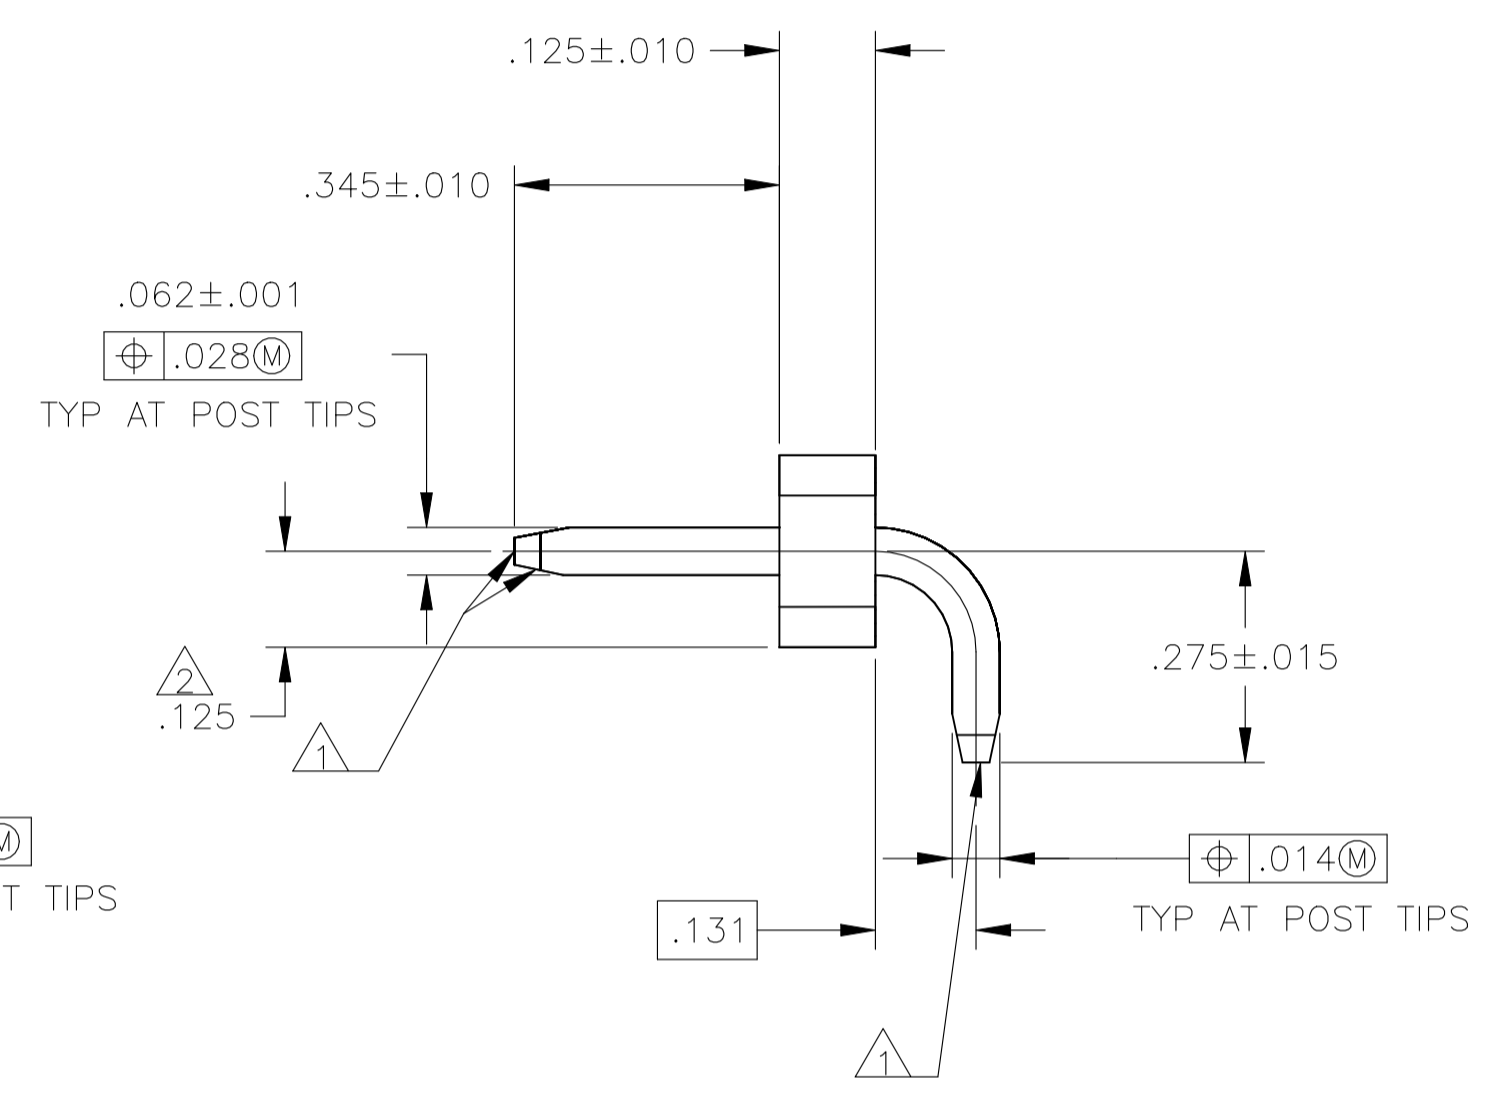
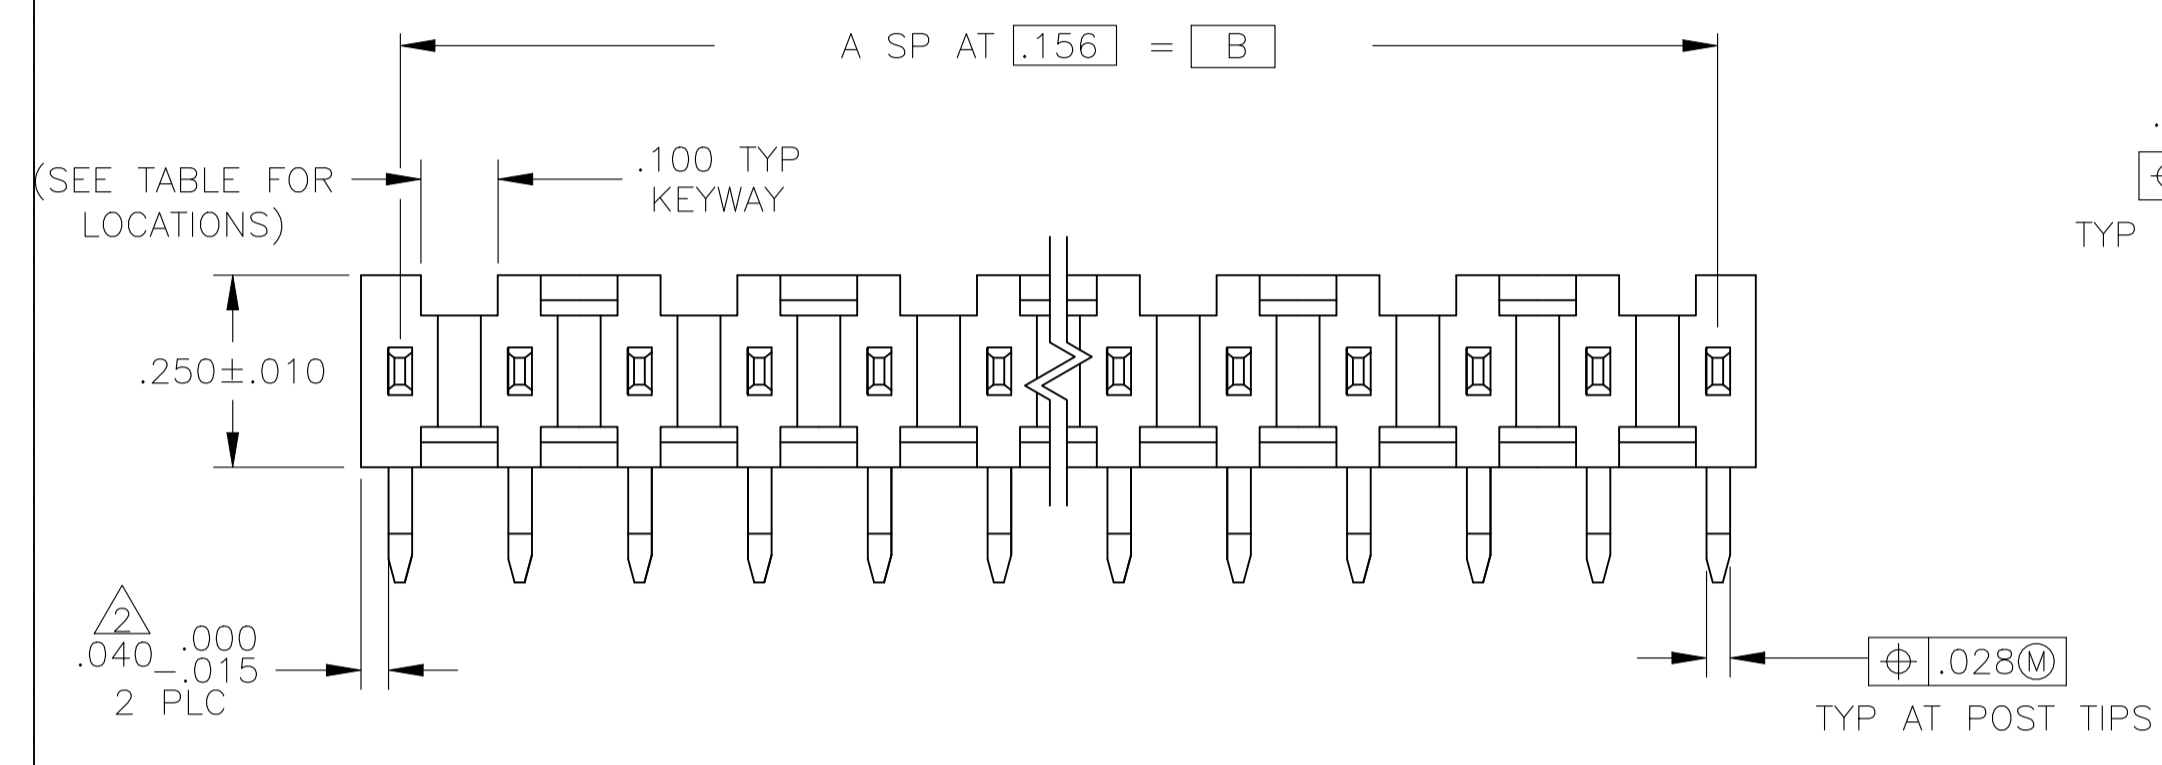



REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
M5		PART OBSOLESCENCE	25MAR2024	KA	SS

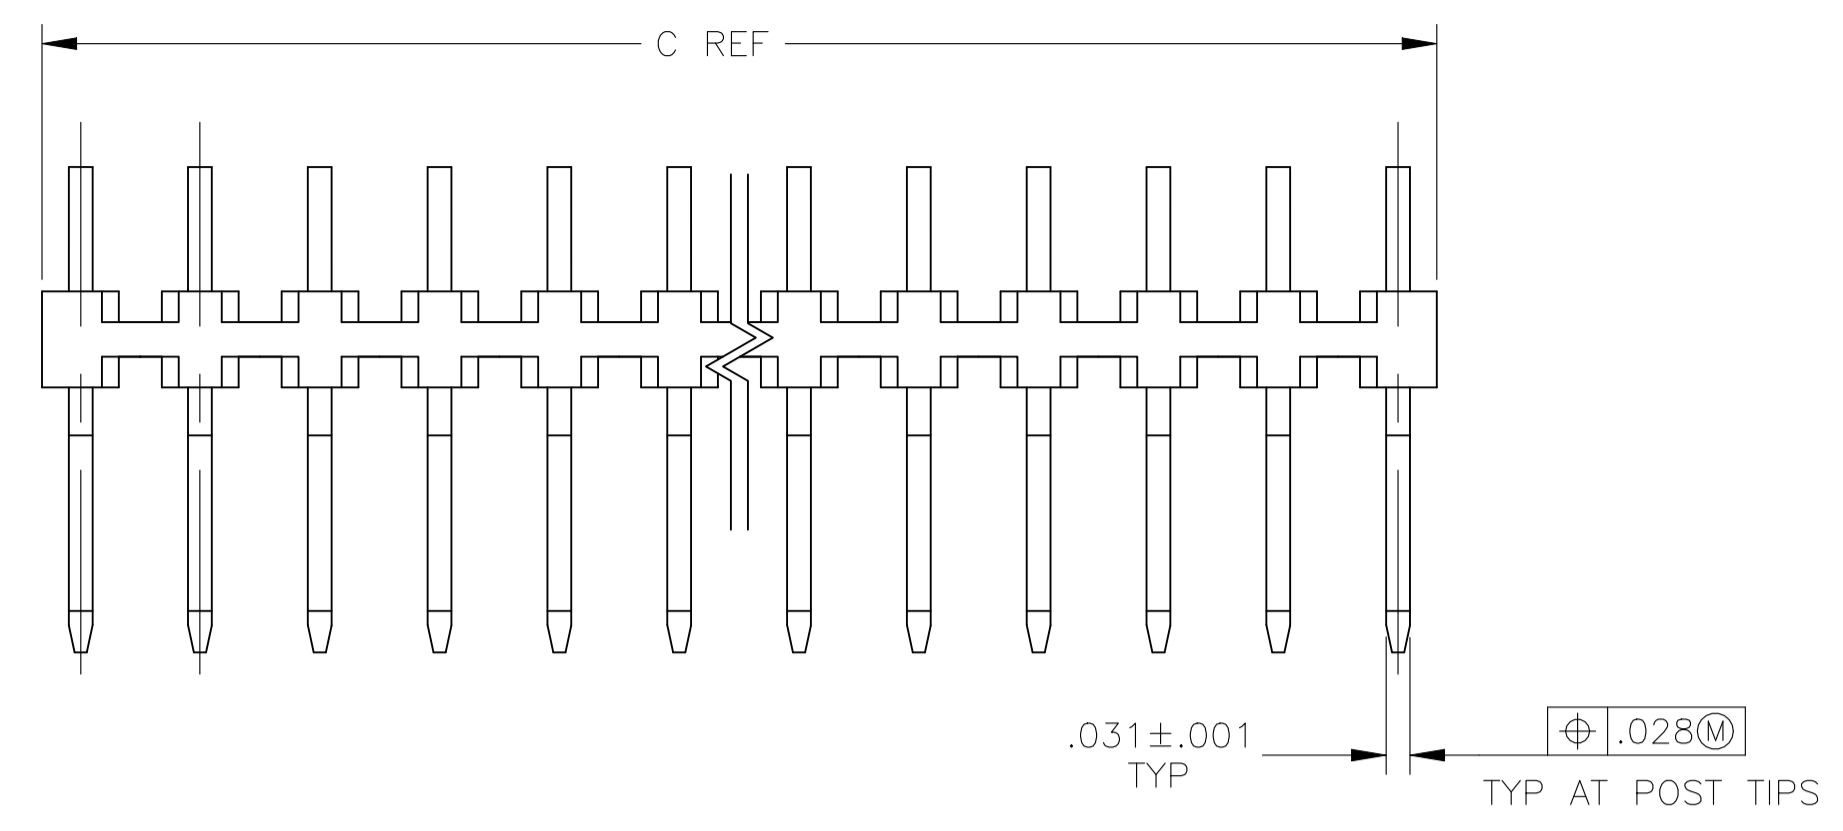

- 1 THE TIPS OF THE POSTS WILL NOT BE PLATED
- 2 THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST AND THE HOUSING
- 3 .000050-.000150 BRIGHT TIN LEAD.
- 4 .000050-.000150 MATTE TIN.
- 5 ROHS /95 /EC/ COMPLIANT
- 6 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

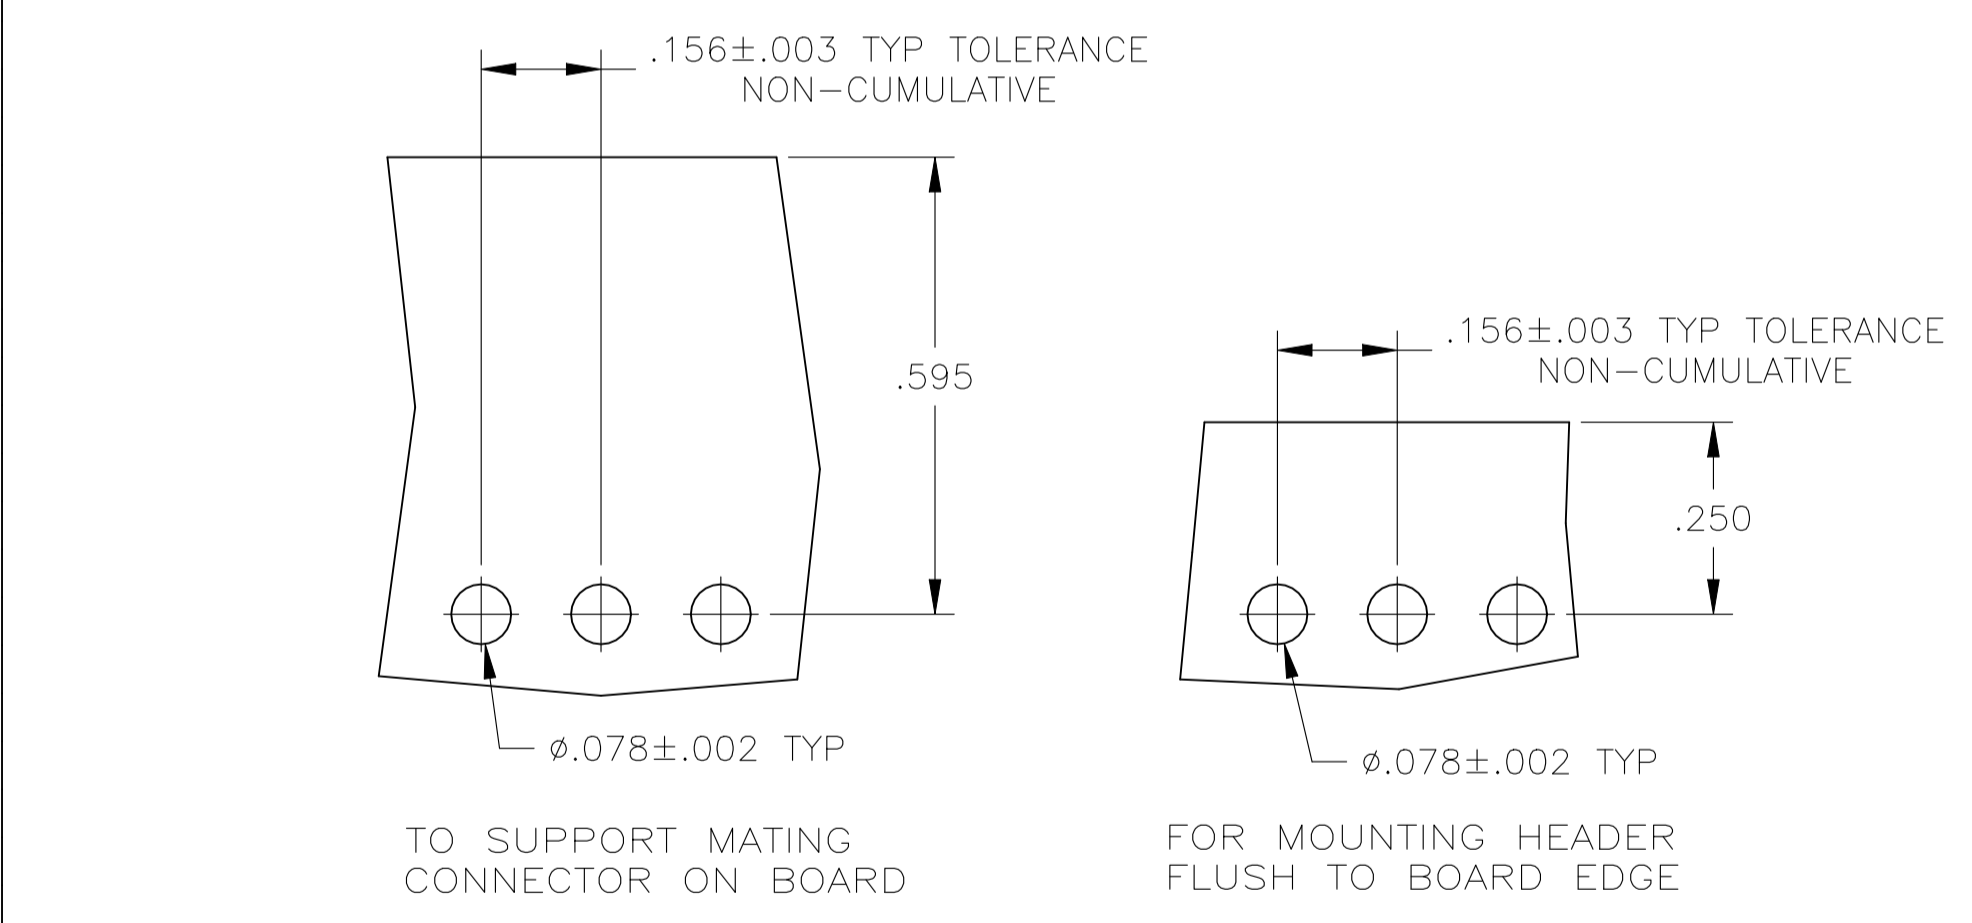

RECOMMENDED BOARD LAYOUTS

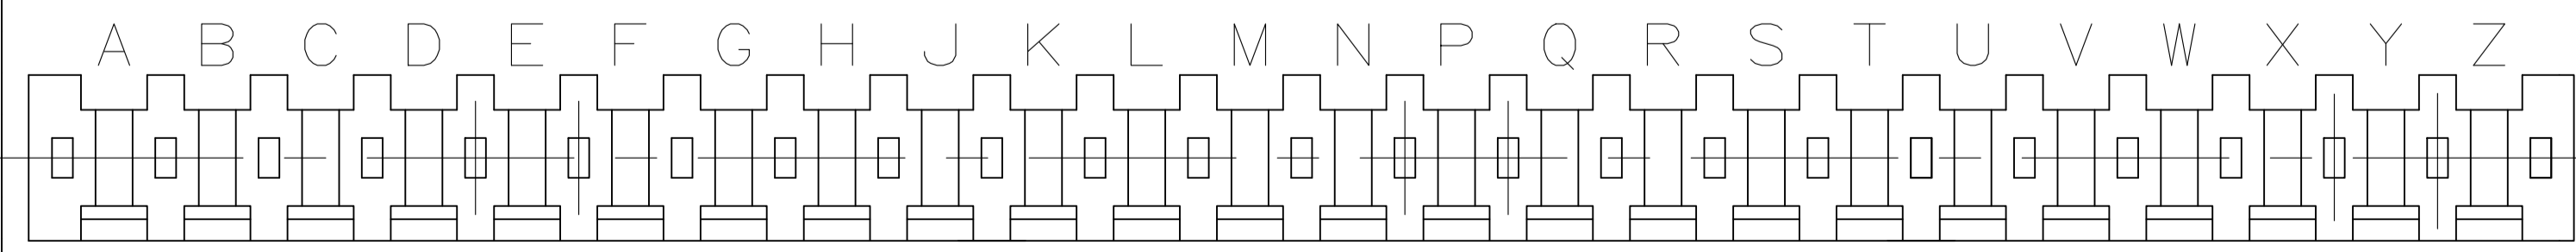

KEYWAY LOCATIONS (REF-SEE TABLE)  
(MATING LENGTH OF POST ON NEAR SIDE)  
SCALE 8:1

FINISH	KEYWAY LOCATIONS	NO OF KEYWAY	C	B	A	NO OF POSN	ASSEMBLY PART NUMBER
6 OBSOLETE	A,C,E,H,K,M,Q,S,U,W,Y	11	3.855	3.744	24	25	7-87655-5
4	A,C,E,G,J,L,N,Q,S,U,W,Y	12	3.699	3.588	23	24	7-87655-4
4	A,D,G,K,N,R,U,X	8	3.543	3.432	22	23	7-87655-3
4	A,C,E,G,J,L,N,Q,S,U,W	11	3.387	3.276	21	22	7-87655-2
4	A,D,G,K,N,R,U	7	3.231	3.120	20	21	7-87655-1
4	A,C,E,G,J,L,N,Q,S,U	10	3.075	2.964	19	20	7-87655-0
4	B,D,F,J,L,N,Q,S	8	2.919	2.808	18	19	6-87655-9
4	A,D,F,J,M,P,S	7	2.763	2.652	17	18	6-87655-8
4	A,D,G,K,N,R	6	2.607	2.496	16	17	6-87655-7
4	A,C,E,G,J,L,N,Q	8	2.451	2.340	15	16	6-87655-6
4	A,D,G,K,N	5	2.295	2.184	14	15	6-87655-5
6 OBSOLETE	A,C,E,G,J,L,N	7	2.139	2.028	13	14	6-87655-4
6 OBSOLETE	A,D,J,M	4	1.983	1.872	12	13	6-87655-3
6 OBSOLETE	A,C,E,G,J,L	6	1.827	1.716	11	12	6-87655-2
6 OBSOLETE	A,D,G,K	4	1.671	1.560	10	11	6-87655-1
4	A,C,E,G,J	5	1.515	1.404	9	10	6-87655-0
6 OBSOLETE	A,D,G	3	1.359	1.248	8	9	5-87655-9
6 OBSOLETE	A,C,E,G	4	1.203	1.092	7	8	5-87655-8
6 OBSOLETE	A,C,E	3	1.047	.936	6	7	5-87655-7
4	A,C,E	3	.891	.780	5	6	5-87655-6
6 OBSOLETE	A,D	2	.735	.624	4	5	5-87655-5
4	A,C	2	.579	.468	3	4	5-87655-4
4	A	1	.423	.312	2	3	5-87655-3
4	A	1	.267	.156	1	2	5-87655-2
6 OBSOLETE	A,C,E,H,K,M,Q,S,U,W,Y	11	3.855	3.744	24	25	2-87655-5
6 OBSOLETE	A,C,E,G,J,L,N,Q,S,U,W,Y	12	3.699	3.588	23	24	2-87655-4
3	A,D,G,K,N,R,U,X	8	3.543	3.432	22	23	2-87655-3
3	A,C,E,G,J,L,N,Q,S,U,W	11	3.387	3.276	21	22	2-87655-2
3	A,D,G,K,N,R,U	7	3.231	3.120	20	21	2-87655-1
3	A,C,E,G,J,L,N,Q,S,U	10	3.075	2.964	19	20	2-87655-0
3	B,D,F,J,L,N,Q,S	8	2.919	2.808	18	19	1-87655-9
3	A,D,F,J,M,P,S	7	2.763	2.652	17	18	1-87655-8
3	A,D,G,K,N,R	6	2.607	2.496	16	17	1-87655-7
3	A,C,E,G,J,L,N,Q	8	2.451	2.340	15	16	1-87655-6
3	A,D,G,K,N	5	2.295	2.184	14	15	1-87655-5
3	A,C,E,G,J,L,N	7	2.139	2.028	13	14	1-87655-4
3	A,D,J,M	4	1.983	1.872	12	13	1-87655-3
3	A,C,E,G,J,L	6	1.827	1.716	11	12	1-87655-2
3	A,D,G,K	4	1.671	1.560	10	11	1-87655-1
3	A,C,E,G,J	5	1.515	1.404	9	10	1-87655-0
3	A,D,G	3	1.359	1.248	8	9	87655-9
3	A,C,E,G	4	1.203	1.092	7	8	87655-8
3	A,C,E	3	1.047	.936	6	7	87655-7
3	A,C,E	3	.891	.780	5	6	87655-6
3	A,D	2	.735	.624	4	5	87655-5
3	A,C	2	.579	.468	3	4	87655-4
3	A	1	.423	.312	2	3	87655-3
3	A	1	.267	.156	1	2	87655-2

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIN L A MAYER 14JUL87  
CHK J SCHIEFFER 14JUL87

TE Connectivity

AMP/ODU MOD I, HEADER ASSEMBLY  
RIGHT ANGLE, SINGLE ROW,  
.156 CL

108-25016

SIZE A1 CAGE CODE 00779 DRAWING NO C=87655

CUSTOMER DRAWING SCALE 4:1 SHEET 1 of 1 REV M5