


CUSTOMER DRAWING

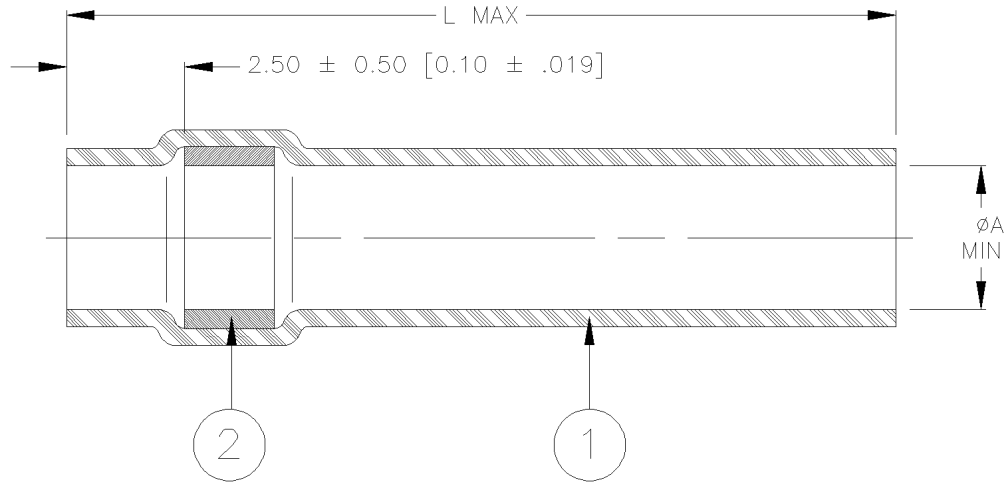


Part Name	Product Dimensions	
	L MAX	øA MIN
CWT-1507	22.00 (.866)	7.00 (0.275)

MATERIALS

1. INSULATION SLEEVE: Radiation cross-linked modified polyolefin. Transparent clear.
2. SOLDER PREFORM WITH FLUX:
 SOLDER: TYPE Cd18 per ANSI J-STD-006.
 FLUX: TYPE ROM1 per ANSI J-STD-004.

APPLICATION

1. This controlled soldering device is designed for termination of a wire to the lead of electrical component or to the terminal of a connector.
2. Temperature range: -55°C to +125°C.

		300 Constitution Dr Menlo Park, CA 94025, U.S.A.		TITLE: SOLDERSLEEVE ONE STEP WIRE TERMINATOR	
		Raychem Devices		DOCUMENT NO.: CWT-1507	
Unless otherwise specified dimensions are in millimeters. [Inches dimensions are shown in brackets]			Tyco Electronics reserves the right to amend this drawing at any time. Users should evaluate the suitability of the product for their application.		
TOLERANCES: 0.00 N/A 0.0 N/A 0 N/A	ANGLES: N/A ROUGHNESS IN MICRON	REV: A			
REVISED BY: UNGUYEN	CAGE CODE: 06090	ECO NUMBER: ECO-10-008266	SCALE: NTS	SIZE: A	SHEET: 1 of 1

© 2010 Tyco Electronics Corporation. All rights reserved.

If this document is printed it becomes uncontrolled. Check for the latest revision.