

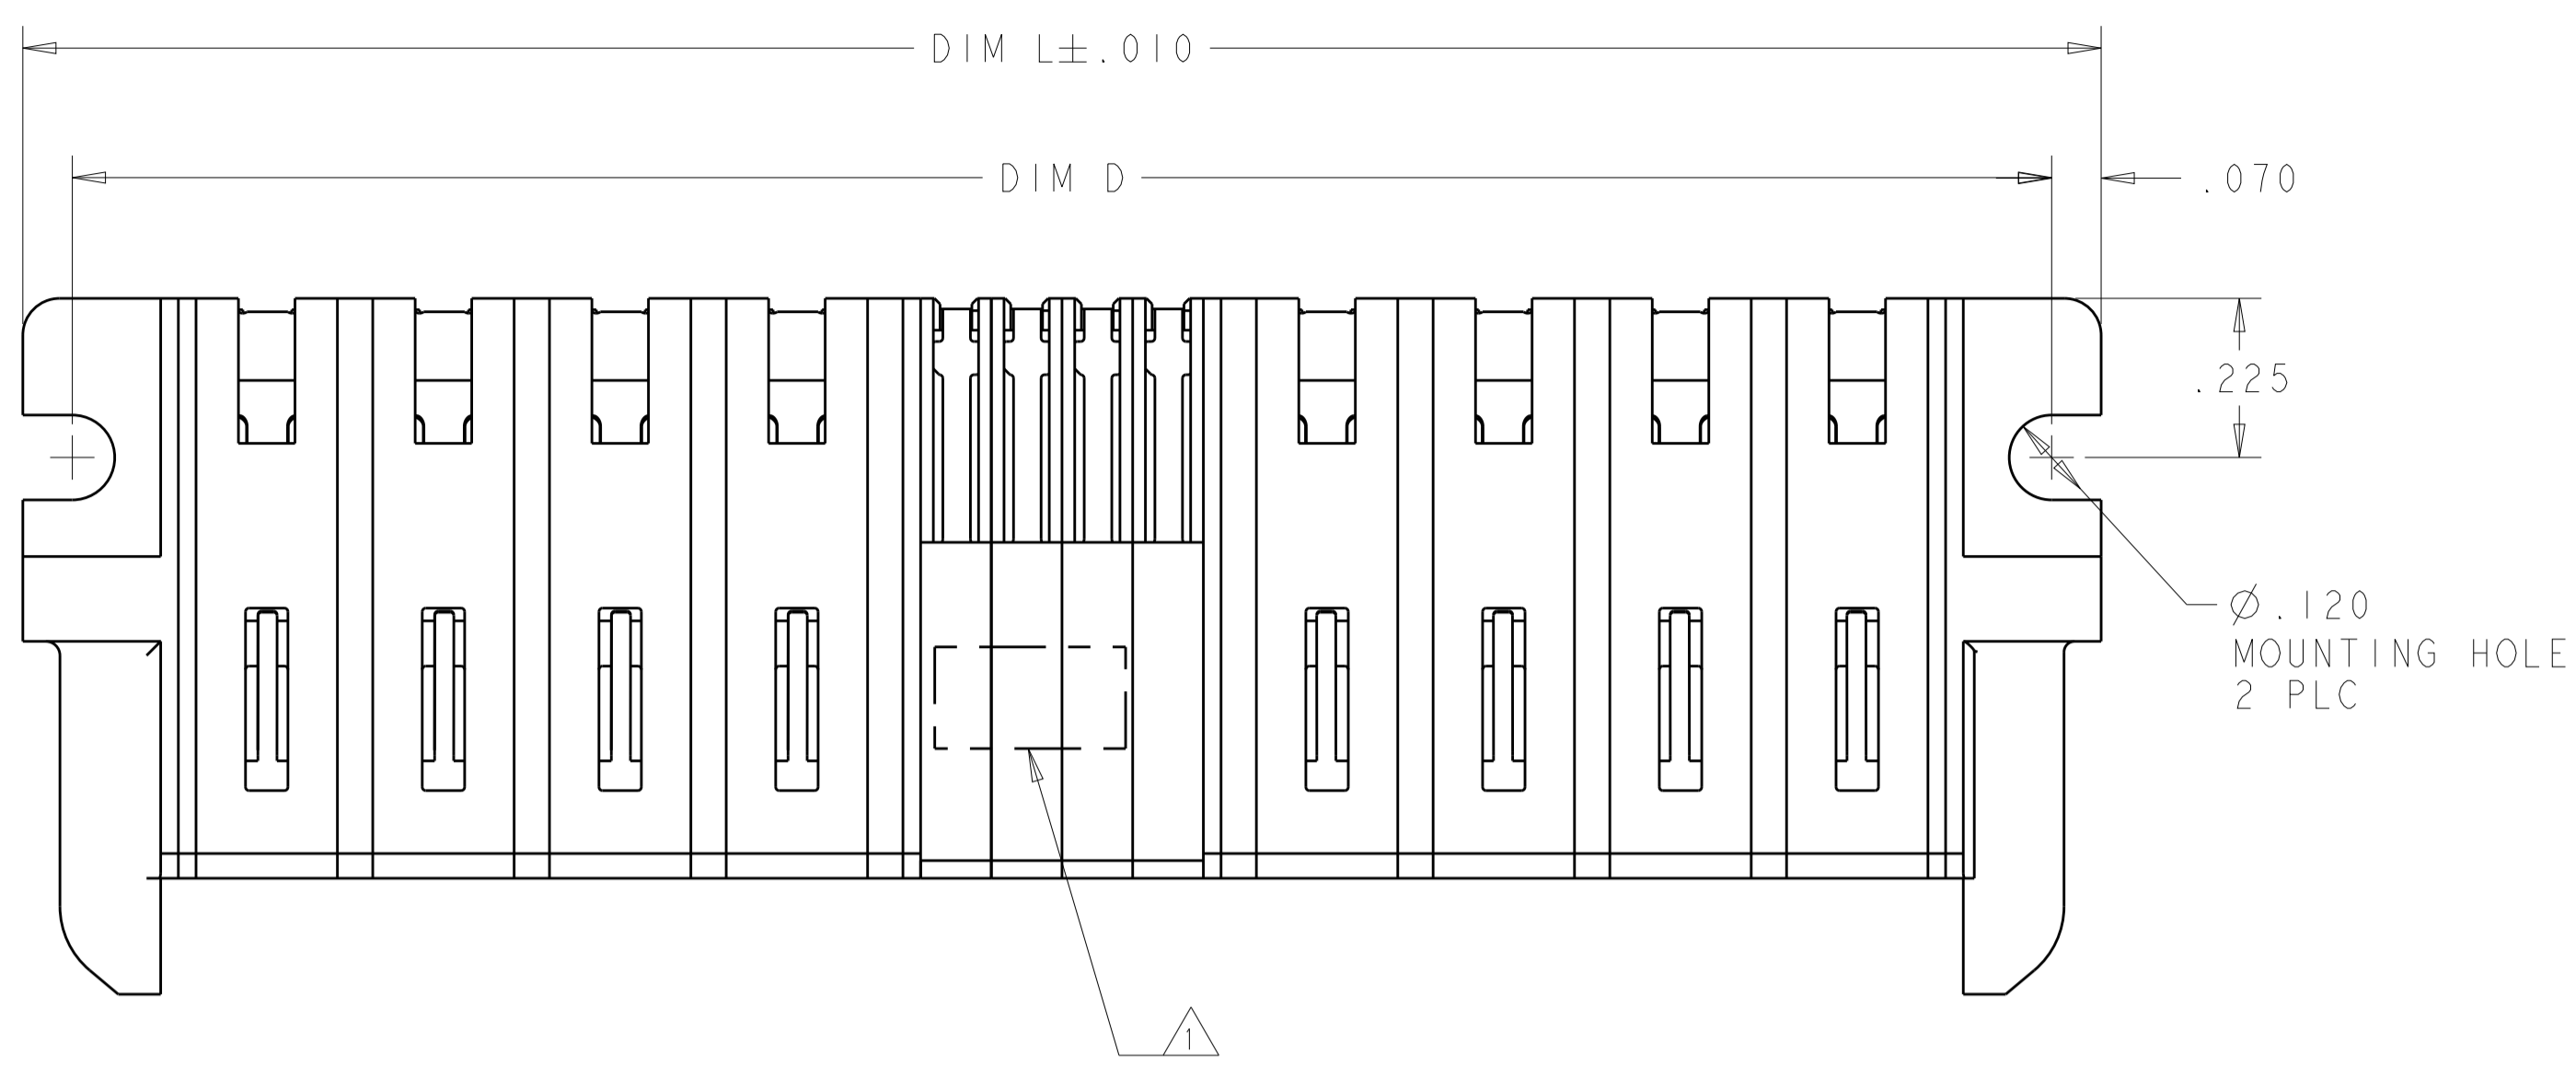
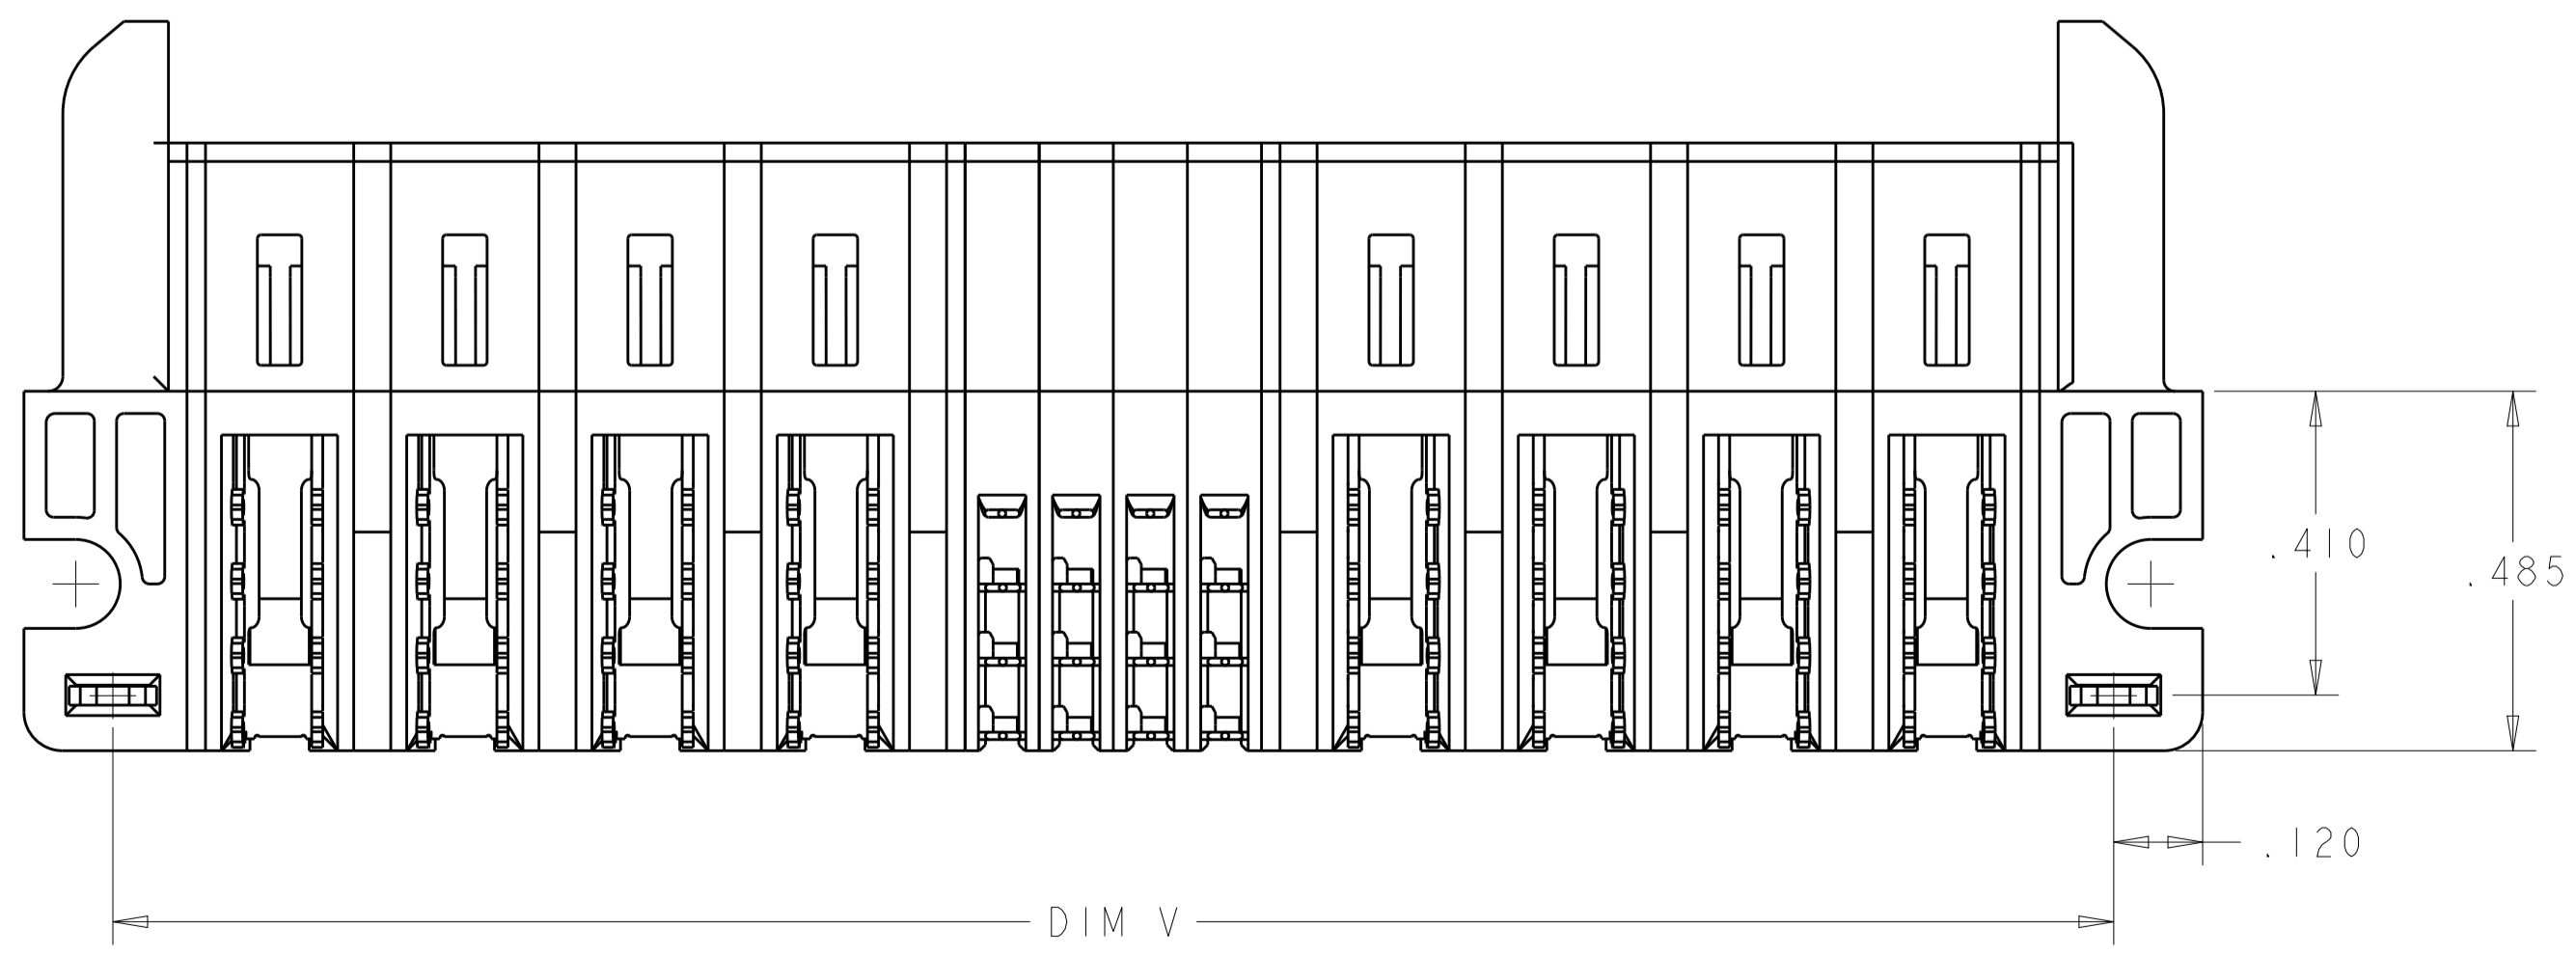


LOC		DIST		REVISIONS			
ES	00	P	LTN	DESCRIPTION	DATE	DWN	APVD
		I		INITIAL RELEASED	14MAR2013	CZ	SZ
		A		REV PER ECR-13-004813	18MAR2013	CZ	SZ

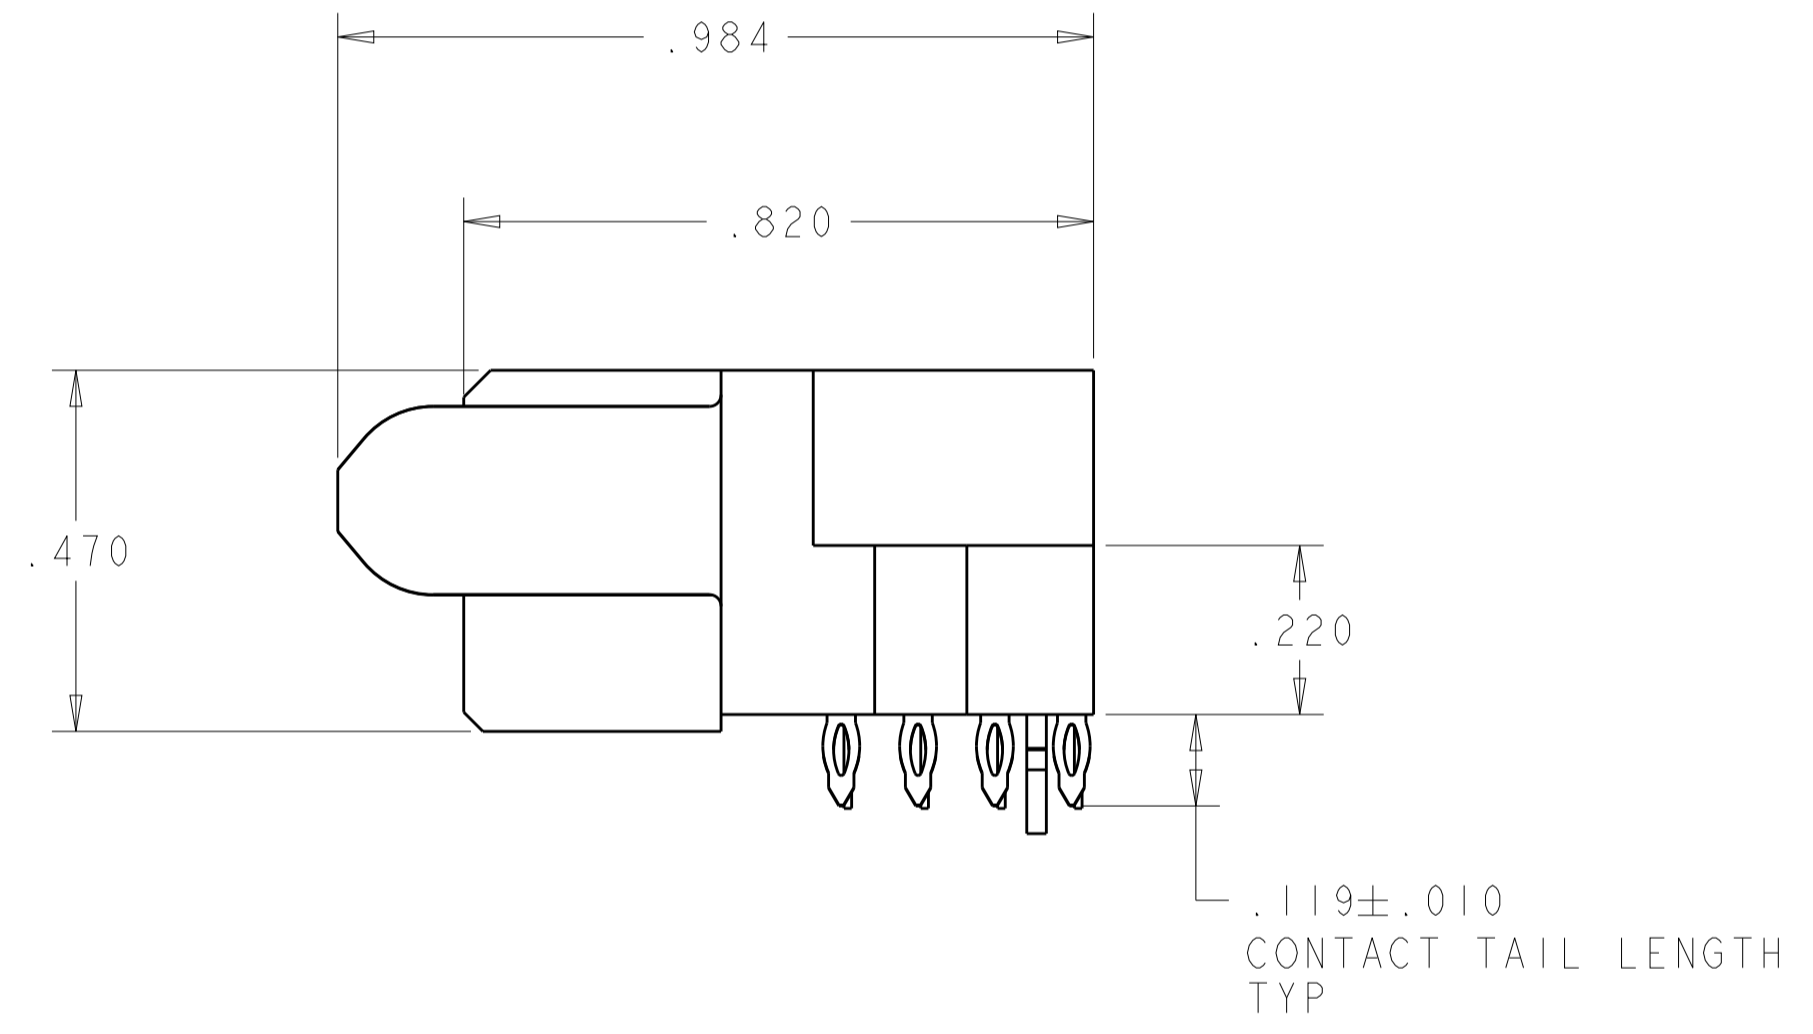

- △ "AMP", PART NUMBER, AND DATE CODE TO BE MARKED IN AREA SHOWN PARTS UNDER 2.000 MAY BE MARKED ON BOTH SIDES.
- △ MATERIAL: HOUSING - GLASS FILLED HIGH TEMP THERMO PLASTIC, UL94 V-O
 SIGNAL CONTACT - COPPER ALLOY
 POWER CONTACT - HIGH CONDUCTIVITY COPPER ALLOY
- △ CONTACT PLATING: NOBLE METAL PLATING AT CONTACT FUNCTIONAL AREA OF POWER AND SIGNAL CONTACTS.
- △ MECHANICAL CONNECTOR KEEP OUT ZONE
- △ DATUM AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER
- △ PCB - ALL HOLE DIAMETERS ARE FINISHED HOLE SIZES
- △ PCB - .0453 ±.0010 DRILLED HOLE PLATED WITH .0003 MIN Sn OVER .001-.003 Cu PLATING TO ACHIEVE A .040 HOLE

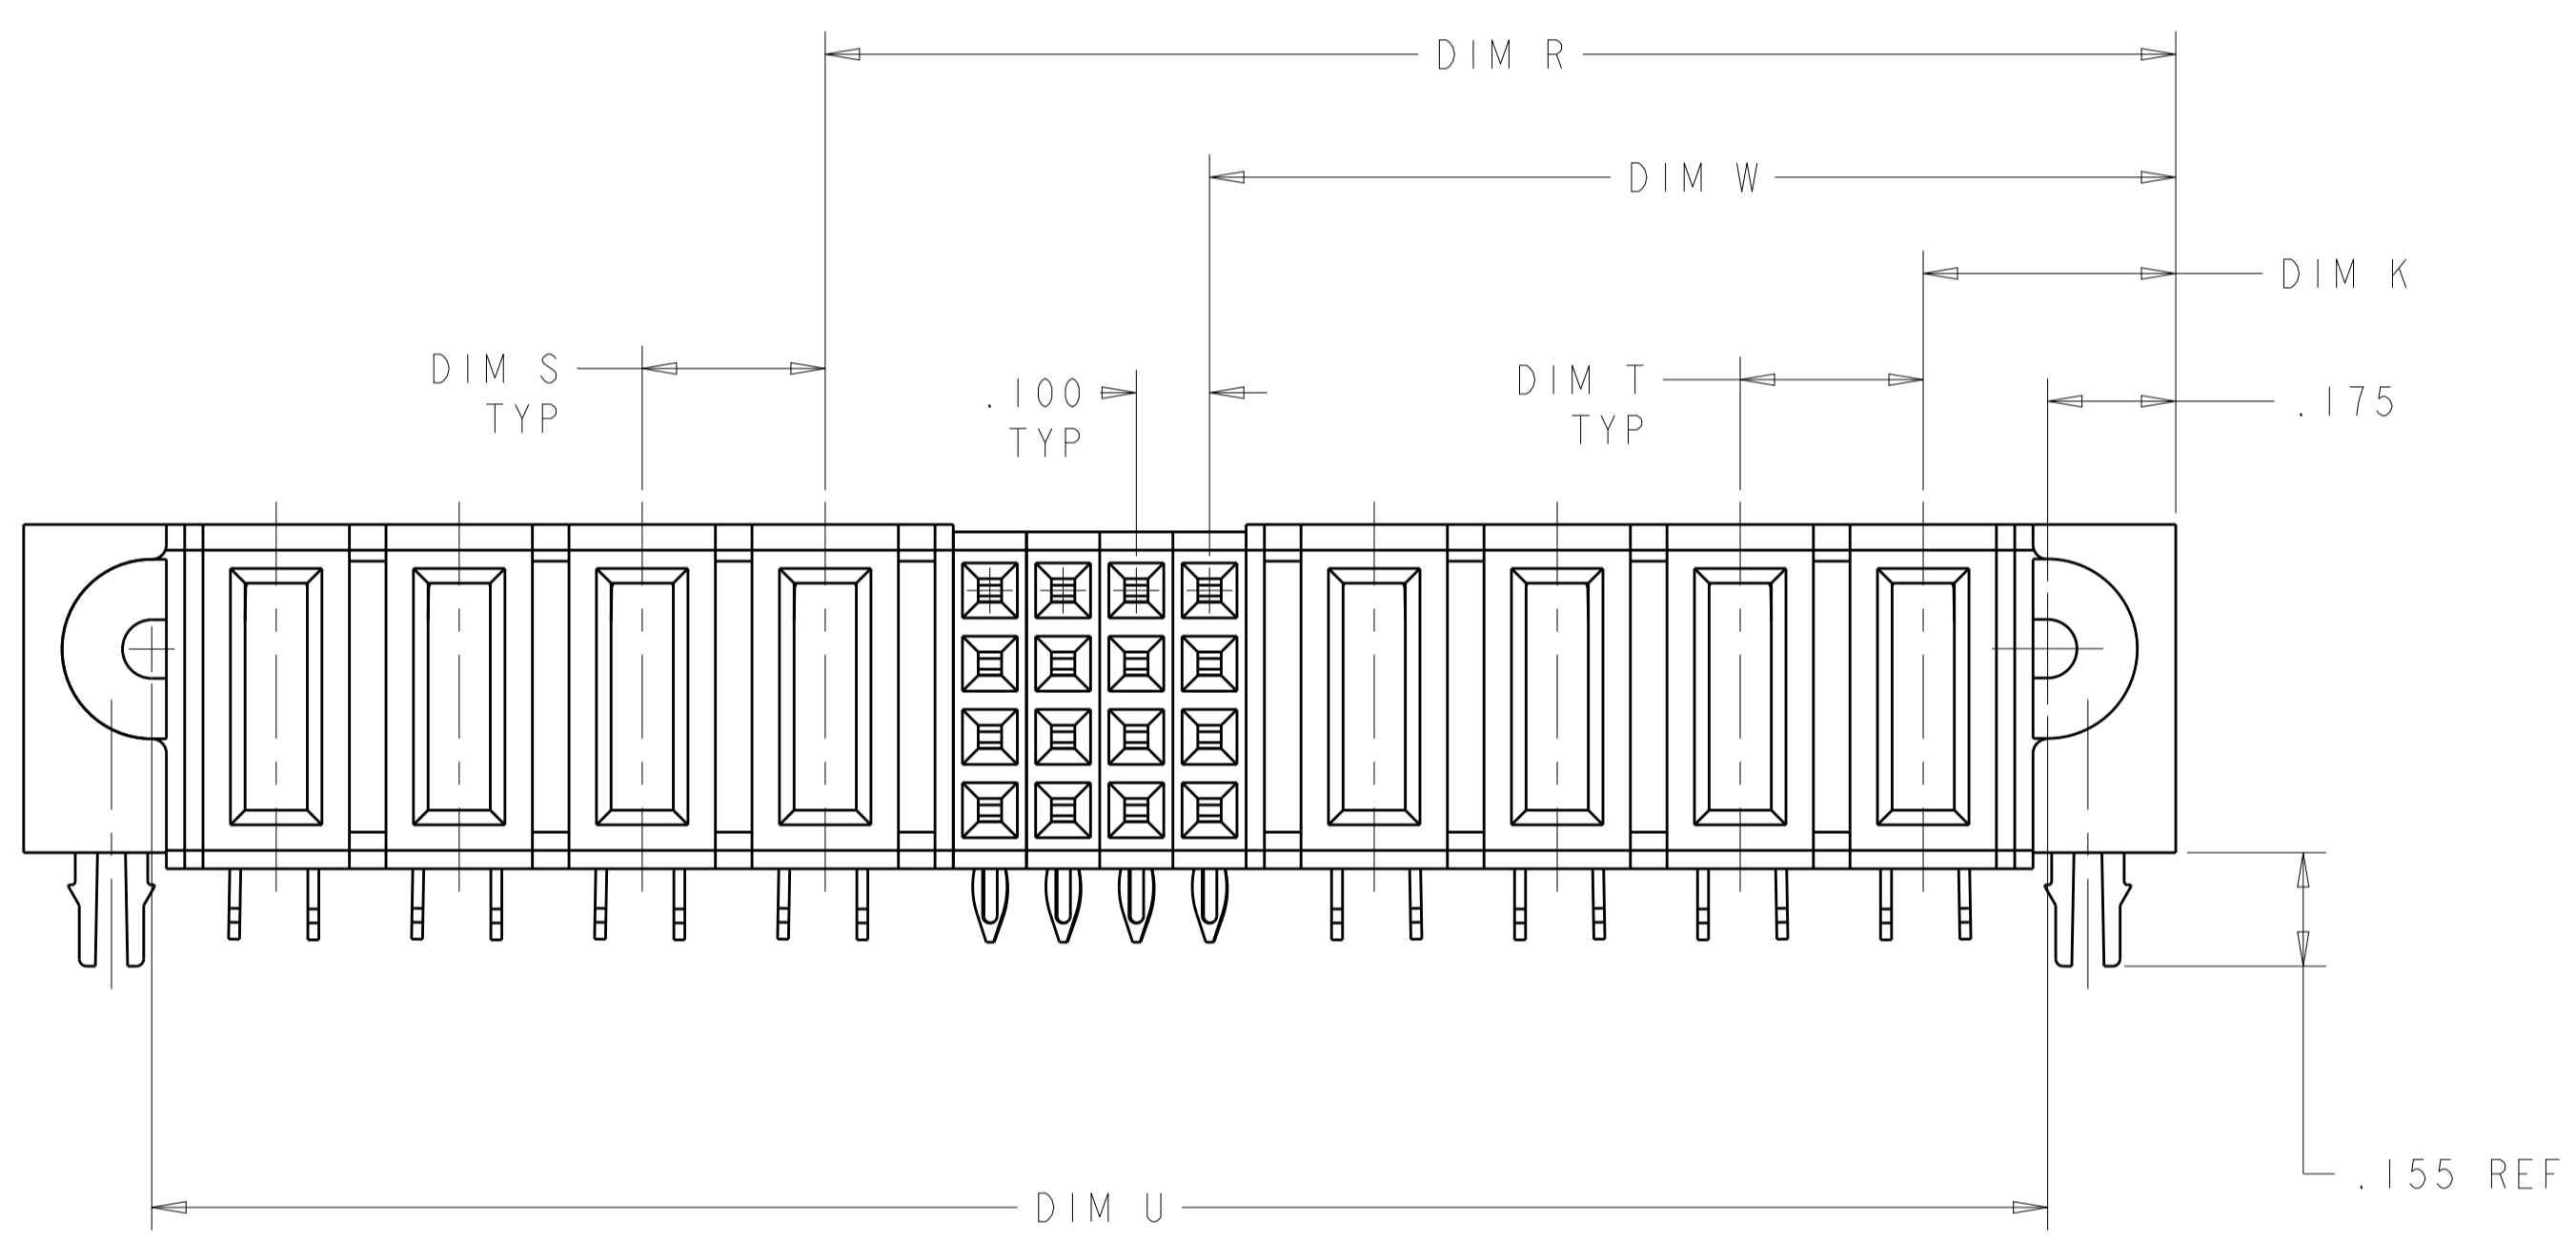

.250	.250	2.700	2.800	2.590	2.940	1.845	1.320	.345	4P + 16S + 4P	2-6450880-4
DIM T	DIM S	DIM V	DIM D	DIM U	DIM L	DIM R	DIM W	DIM K	DESCRIPTION	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT. DWN: C.ZHOU 14MAR2013, CHK: S.ZHAO 14MAR2013, APVD: S.ZHAO 14MAR2013

DIMENSIONS: INCHES. TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±.1, 1 PLC ±.1, 2 PLC ±.01, 3 PLC ±.005, 4 PLC ±.0020, ANGLES ±.7°

MATERIAL: 2. FINISH: 3.

PRODUCT SPEC: 108-2292, APPLICATION SPEC: 114-13251, WEIGHT: -

NAME: RIGHT ANGLE RECEPTACLE ASSEMBLY CONTACT AND SHORT END MODULES MULTI-BEAM XLE. SIZE: A100779, CAGE CODE: C-2-6450880-4, RESTRICTED TO: -

CUSTOMER DRAWING. SCALE: 4:1, SHEET: 1 OF 2, REV: A

