


# SPECIFICATION CONTROL DRAWING

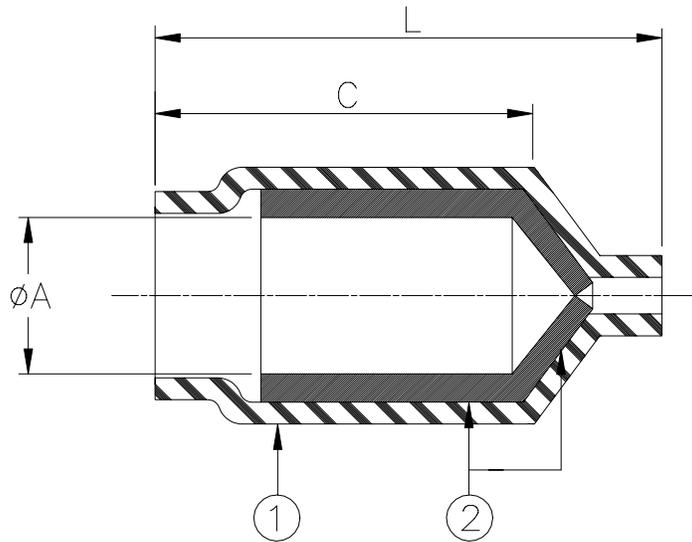

Product Revision		Product Dimensions		
Product Name		L max	øA min	C Ref
D-305-04	C	16.5 (0.650)	2.15 (0.085)	9.4 (0.370)
D-305-05	D	16.9 (0.665)	3.2 (0.125)	9.4 (0.370)

## MATERIALS

1. INSULATION SLEEVE: Heat-shrinkable, transparent blue, radiation cross-linked polyvinylidene fluoride.
2. MELTABLE INSERTS: Low outgassing immersion resistant thermoplastic

## APPLICATION

1. These parts are designed to seal the end of single wires having insulations rated for at least 125°C.
2. Temperature range: -55°C to +150°C.

\* A trademark of Raychem Corporation.

<b>Raychem</b>		THERMOFIT DEVICES	Raychem Corporation 300 Constitution Drive Menlo Park, CA 94025 USA	TITLE: <b>CAP, WIRE END SEAL, LOW-OUTGASSING</b>			
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. INCHES DIMENSIONS ARE BETWEEN BRACKETS.				DOCUMENT NO.: <b>D-305-0X</b>			
TOLERANCES: 0.00 N/A 0.0 N/A 0 N/A	ANGLES: N/A  ROUGHNESS IN MICRON	Raychem reserves the right to amend this drawing at any time. Users should evaluate the suitability of the product for their application.		DCR NUMBER: D981034		REPLACES: D3050X	
DRAWN BY: M. FORONDA	DATE: 06/23/98	PROD. REV. SEE TABLE	DOC ISSUE: 1	SCALE: None	SIZE: A	SHEET: 1 of 1	

If this document is printed it becomes uncontrolled. Check for the latest revision