



## LOADBREAK ELBOW (ELB-25-210)

25 kV 200A

### KEY FEATURES

- Peroxide cured EPDM rubber ensures low tension set and high dielectric strength
- 100% factory production tested for partial discharge and AC Hipot per IEEE 386 Standard
- Capacitive test point provided on elbow
- Fits 25 kV cables up to 250 kcmil
- Molded semiconducting shield provides ground shield continuity in accordance with IEEE 592
- Conforms to IEEE Standard 386

TE Connectivity's (TE) Raychem ELB-25-210 elbows are designed to terminate underground cables to high-voltage apparatus such as transformers and switchgear that are equipped with bushings. They are fully shielded and fully submersible and are designed in accordance to IEEE Standard 386. Loadbreak elbows are designed for use with standard hotstick tools, which allows a loadmake/break operation with a physical disconnect.

They are designed for use on extruded (XLPE or EPR) solid dielectric cable. The conductor range is from #1 AWG to 250 kcmil for aluminum or copper conductors with insulation diameters from 0.370" to 1.060".

This 200A loadbreak elbow includes a copper top compression connector, which connects the cable with the loadbreak probe. Connector is easy to crimp, and suitable for aluminum and copper conductors, and forms a reliable connection.

### Optional Integral Jacket Seal

The elbow can be ordered with an integral jacket seal (part number suffix -ES), which is an environmental seal molded to the elbow that prevents moisture ingress.

**Customers can count on consistent, high quality products, driven by TE's proven innovation and backed by our extraordinary customer support.**



RATINGS	
Description	25 kV
Max Rating Phase-to-Ground	15.2 kV
Max Rating Phase-to-Phase	26.3 kV
BIL and Full Wave (Crest)	125kV
Continuous Current	200 A
Switching Current	200 A
Fault-closure Current for 0.17s after 10 Switching Operations	10,000 A symmetrical

### Ordering Formula

ELB-15	1	2	3	4
--------	---	---	---	---

1	Current Rating   Test Point Code
200	= 200 AMP WITHOUT test point
210	= 210 AMP WITH test point

2	Cable Insulator O.D. Range	
Code	Inches	mm
B	.72 - .88	18.3 - 22.4
BB	.85 - 1.01	21.6 - 25.7
C	.92 - 1.08	23.4 - 27.4
D	1.04 - 1.20	25.4 - 30.5

3	Compression Lugs   Conductor Size (Aluminum or Copper)		
Code	Str/Comp	Compact	Solid
2	2	1	1
10	1/0	2/0	2/0
20	2/0	3/0	3/0
30	3/0	4/0	4/0
40	4/0	250	250

4	Jacket Sealing
Code	Type
Blank	No Jacket Seal
ES	Integral Jacket Seal


### Elbow Kit Contents:

Elbow body	Copper top terminal
Loadbreak probe	Probe installation tool
Silicone lubricant	Sealing mastic (integral seal only)
Installation instructions sheet	

### te.com/energy

©2016 - 2017 TE Connectivity Corporation family of companies. All Rights Reserved. EPP-2712-DDS-10/17-EN-AMS-ELB-25-210-Raychem E481

Raychem, TE, TE Connectivity and TE connectivity (logo) are trademarks. Other logos, product and/or company names might be trademarks of their respective owners. While TE has made every reasonable effort to ensure the accuracy of the information in this brochure, TE does not guarantee that it is error-free, nor does TE make any other representation, warranty or guarantee that the information is accurate, correct, reliable or current. TE reserves the right to make any adjustments to the information contained herein at any time without notice. TE expressly disclaims all implied warranties regarding the information contained herein, including, but not limited to, any implied warranties of merchantability or fitness for a particular purpose. The dimensions in this catalog are for reference purposes only and are subject to change without notice. Specifications are subject to change without notice. Consult TE for the latest dimensions and design specifications.

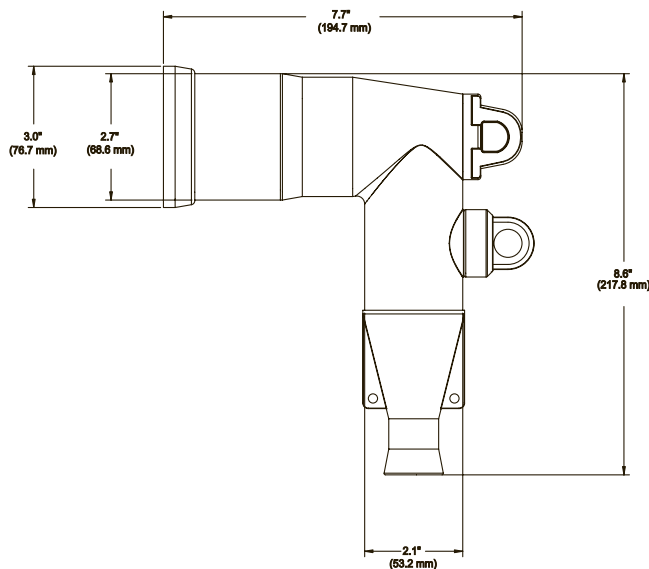

### Related Test Reports

Test Reports: EDR 5581 (25 kV ELB), 5579 (25 kV LRTP/ETP), 5580 (25 kV ELB-BI), Applicable standards: IEEE 386; IEEE 592

### FOR MORE INFORMATION:

#### TE Technical Support Centers

USA:	+ 1 800 327 6996
France:	+ 33 380 583 200
UK:	+ 44 0870 870 7500
Germany:	+ 49 896 089 903
Spain:	+ 34 916 630 400
Italy:	+ 39 333 250 0915
Benelux:	+ 32 16 351 731
Canada:	+ 1 (905) 475-6222
Mexico:	+ 52 (0) 55-1106-0800
Latin/S. America:	+ 54 (0) 11-4733-2200
China:	+ 86 (0) 400-820-6015