

REV. B
DCO 300781


TOLERANCES $\pm .010$ " - UNLESS OTHERWISE SPECIFIED

COIL: @ 25°C
 RESISTANCE _____ 20 OHMS $\pm 10\%$
 NOMINAL VOLTAGE _____ 6 VDC
 MUST OPERATE _____ 3.20 VDC MAX.
 _____ TRANSIENT SUPPRESSION - 42 VDC MAX.
 MUST RELEASE _____ 1.60 VDC MAX., 0.40 VDC MIN.

ENVIRONMENT:
 VIBRATION _____ 10 _____ Hz TO _____ 3000 _____ Hz @ _____ 30 _____ g's
 SHOCK _____ 200 _____ g's _____ 6 _____ MS. DURATION
 TEMPERATURE _____ -70 _____ °C TO _____ +125 _____ °C

NOTES: _____ OPERATE, RELEASE 10 MS MAX.
 _____ CONTACT STABILIZATION 2.5 MS MAX.
 _____ CONTACT BOUNCE 1 MS MAX.
 _____ CONTACT BREAK BOUNCE 0.1 MS MAX.

CUSTOMER DATA SHEET

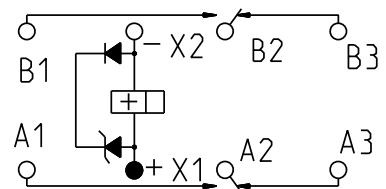

TERMINAL VIEW

CONTACT RATING: _____ LOW LEVEL
 TO 10 AMPS 28 VDC, 115 VAC 400 Hz RESISTIVE,
 100,000 OPERATIONS

DR. B.D. 05MAR2008 CK. 3/7/08 J.M.B.

Tyco Electronics ©COPYRIGHT 2005
 TYCO ELECTRONICS CORPORATION
 ALL INTERNATIONAL RIGHTS RESERVED

CUST. _____
 CUST. NO. M83536/10-005M REV. ---

TE NUMBER
 1617749-9

CII PART NUMBER
 FCA-210-1005M