

MSD INC.

ENGINEERING DATA SHEET

RELAY TYPE: FCA-410-1617 M COMPUTER PART No.: 9244540

TEST PROCEDURE

CUSTOMER/SPECIFICATION: MIL-R-83536/16-017 REV NONE

MSDP-790

TEST REQUIREMENTS

COIL RES.: 290 +/- 10% ohms OPERATE TIME: 15 mS Max RELEASE TIME: 15 mS Max

CONTACT MAKE BOUNCE: 1 mS Max N.O. BREAK BOUNCE: 0.1 mS MAX

CONTACT STABILIZATION TIME: 2.5 mS Max RATED COIL VOLTAGE: 28 Vdc

CONTACT RES.: MFG TEST: 8 Milliohms @ 10 mA FINAL TEST: 10 Milliohms @ 10 mA

CONTACT VOLTAGE DROP: FINAL TEST: 100 mV Max @ 10 A - 6 V dc



HI-POT: 1250 V rms ALL POINTS, EXCEPT 1000 V rms COIL TO CASE

INSULATION RESISTANCE: 100 Megohms Min @ 500 V dc

VIBRATION: MIL-STD-202, METHOD 204 (30G's/100-3000 Hz)

SEAL TEST: 1X10⁻⁸ Max LEAK RATE COIL TRANSIENT SUPPRESSION: 42 Vdc MAX

OTHER: _____

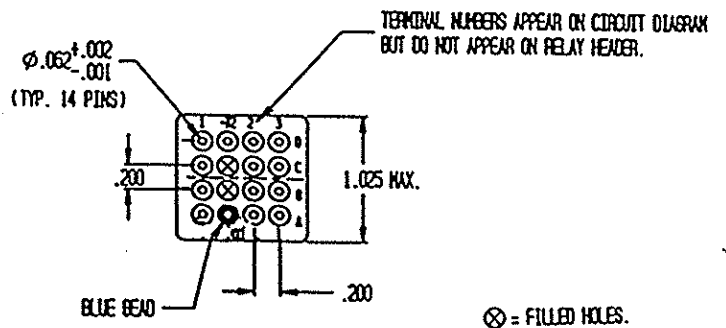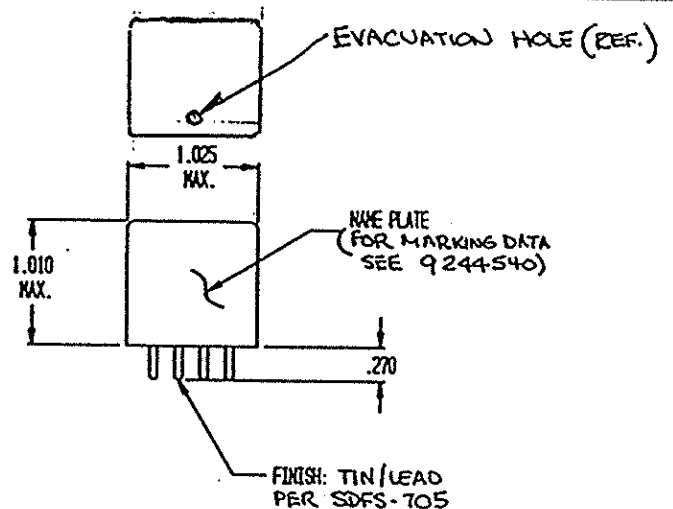

Prepared By: Date		Approved By: Date	
LES WYNNE 3-15-96		<i>J. Tocher</i> 3-19-96	
Rev	ECN No.	Date	
A	96-065	3-15-96	

SPECIAL INSTRUCTIONS