


CUSTOMER DRAWING

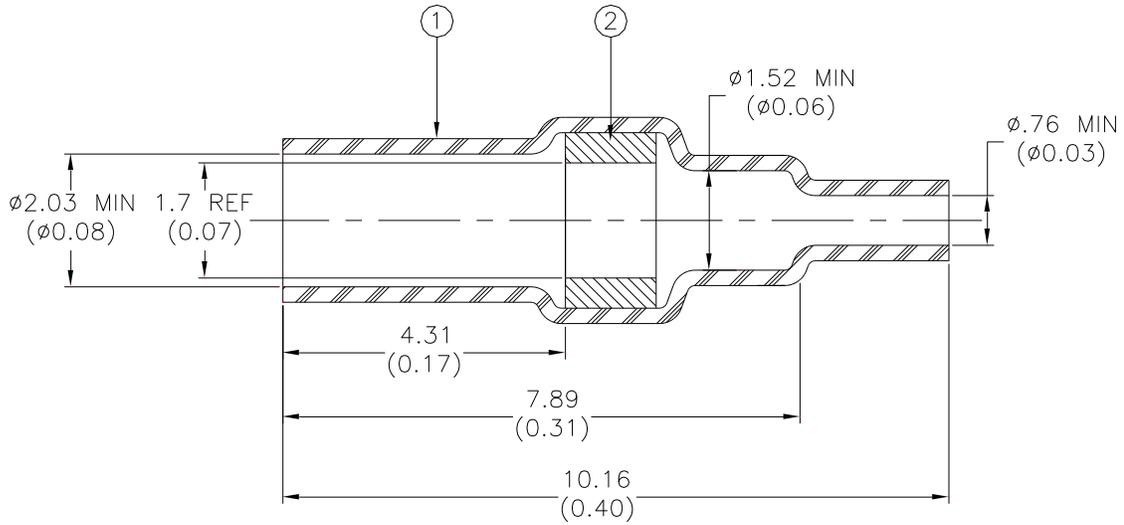


MATERIALS

1. INSULATION SLEEVE: Heat-shrinkable, radiation cross-linked modified polyvinylidene fluoride.
2. SOLDER PREFORM WITH FLUX:
 - SOLDER: TYPE Sn62 Pb36 Ag2 per ANSI-J-STD-006.
 - FLUX: TYPE ROL0 per ANSI-J-STD-004.

APPLICATION

1. This controlled soldershield device is designed for termination of tin or silver-plated wires having an insulation rated for at least 125°C.
2. Temperature range: -55°C to +150°C.

For best results, prepare the cable as shown:

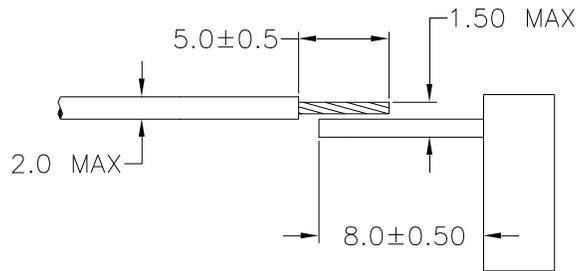

		Raychem DEVICES		TITLE: SOLDERSLEEVE* WIRE TERMINATOR		
Unless otherwise specified dimensions are in millimeters. [Inches dimensions are shown in brackets]				DOCUMENT NO.: W-040-46		
TOLERANCES: 0.00 N/A 0.0 N/A 0 N/A	ANGLES: N/A ROUGHNESS IN MICRON	TE Connectivity reserves the right to amend this drawing at any time. Users should evaluate the suitability of the product for their application.		REV: B	DATE: 09-Mar-2020	
PREPARED BY: P.TALLY	CAGE CODE: 06090	ECO NUMBER: ECO-20-003687		SCALE: NTS	SIZE: A	SHEET: 1 of 1

© 09-Mar-2020 Tyco Electronics Corporation. All rights reserved.

If this document is printed it becomes uncontrolled. Check for the latest revision.

*TE Connectivity, TE connectivity (logo), Raychem, SolderSleeve are trademarks