



HEAT SHRINK RAYCHEM TECHNOLOGY


A PROVEN TRACK RECORD OF SOLVING
THE WORLD'S HARSHTEST CHALLENGES




For more than 60 years, Raychem product line from TE Connectivity (TE) has supported the delivery of power for a wide variety of industries, applications and environments. With a proven track record of technical innovation, reliable performance, lower installation costs and exceptional technical support, TE provides heat shrink solutions for sealing and protection including tubing, tape, and insulation. TE pioneered the original heat shrink technology for energy applications and the industry continues to count on us to deliver the latest advances.

CONSTANT OPTIMIZATION OF PROVEN TECHNOLOGY


Our Raychem material technology is based on specially-formulated thermoplastic polymer materials. Through our cost-effective manufacturing processes, TE can combine chemical additives with the polymers to create optimized solutions for various industry applications. The compounds for these materials are designed, selected, and mixed in TE's own compounding factories. Sophisticated process controls employed during extrusion, cross-linking and expansion ensure uniform wall-thickness before and after installation. Some of our significant technical advances include:




Resistance to surface electrical activity



Moisture protection oil barrier




Void-free interfacial bonding




Electrical insulation shape memory



Environmental sealing and protection




Mechanical protection



Flame retardant and fire resistant



Resistance to thermal aging and UV light



Electrical stress grading and conductivity


SUPERIOR ENGINEERING THROUGH POLYMER CROSS-LINKING TECHNOLOGY

Heat shrink material is comprised of polymeric materials (1) exposed to a high-energy electron beam that causes permanent cross-linking, or intermolecular joining, of adjacent molecules. Hydrogen atoms are separated from the polyethylene chains (2) and the carbon elements between adjacent chains establish connections joining together (3). Due to cross-linking, the heat shrink material loses its melting properties allowing it to be heated to temperatures beyond the crystalline melting point without melting. Above this temperature, heat shrink can be expanded and formed in shapes that will remain in position while the temperature decreases below the crystalline melting point again.


Heat shrink products are supplied in this expanded form in easy installation kits to our customers. When installers heat the products up again beyond the crystalline melting point, with a gas torch or hot air gun, the products shrink back to their original shape. This elastic memory remains in effect for the entire lifetime of the product allowing an unlimited shelf life* under specific storage and warehouse conditions. As the polymeric materials shrink during installation, they also build up high pressure creating superb sealing and electrical behavior.

Cross-linking properties of heat shrink technology.


(1) Polyethylene chains

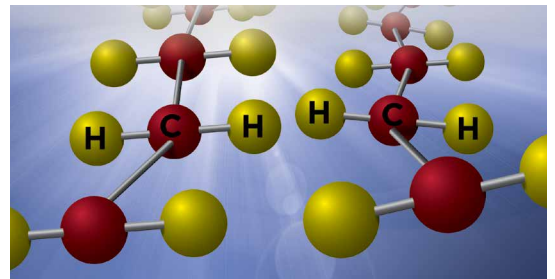

(2) Electron beams separating hydrogen atoms

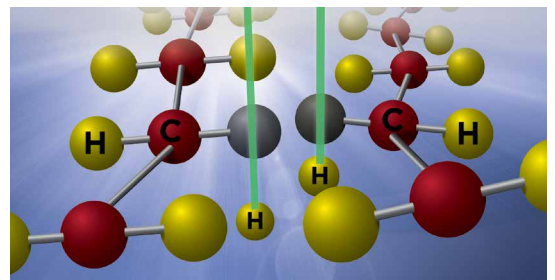

(3) Carbon elements cross-linking

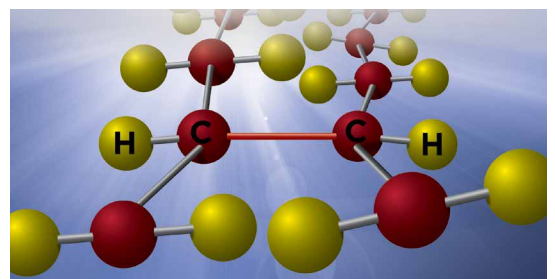

* Unlimited shelf life conditions exist when stored properly in original unopened packaging, out of direct sunlight and at normal room temperature (assumed 23°C - 50°C) unless otherwise noted.

WEATHERING THE ELEMENTS AND THE TEST OF TIME

Our world-renowned Raychem materials and technology are well known for their high quality, reliability, easy installation, and ability to withstand weathering processes like pollution and contamination, UV-light, salt fog and other extreme harsh environments. TE's highly durable heat shrink products are the perfect complement for TE's rugged and reliable cable product offering:

- Terminations
- Insulation
- Stress control
- LV MV HV applications
- Joints
- Tubing and molded parts
- Wildlife and asset protection

Proven Longevity: Decades of Data

TE's heat shrink products' advantage and their superior technology enables their durability and long service life in harsh environments. They continue to perform robustly in the field more than 30 years after installation. Our data indicates:

- Most of the world's major energy utilities use TE products
- **60** years of material science backing Raychem technology
- **40** years of development and enhancements behind Raychem cable accessories
- **30** years without maintenance is typical for TE's heat shrink products

This long service life significantly reduces the total cost of ownership and ensures your connectivity will last decades to come.

On Demand Field Training Support

When you partner with TE, you are getting more than reliable products. You are getting local support at 18 worldwide training centers, backed by the combined wisdom and experience of more than 7,000 engineers.

- Our engineers and product teams provide some of the best expertise and specialized support. We support your team finding the best and most cost effective standard or tailor-made solutions to your design challenges.
- We offer hands-on field support for stress-free installations. Our technical sales engineers and product managers are accessible to train your installers on our safe and easy installation methods.


A COMPREHENSIVE RANGE OF HEAT SHRINK TECHNOLOGY

MV JOINTS

- Combines 3 layered, thick wall extrusion
- Reliable multiple functions in one tubing
- Covers multiple cable types
- Conductive electrical performance
- Conductive outer layer



MXSU

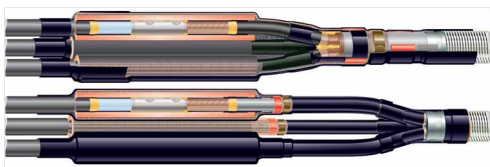

MV TERMINATIONS

EPKT terminations for polymeric and MIND paper insulated cables from 7.2 kV up to 42 kV:

- EPKT-R universal termination family for 12 – 36 kV is based upon proven heat shrinking stress-control technology
- All applications for polymeric and MIND paper are on 1-core, 3-core, armoured and unarmoured cables
- Red non-tracking Raychem HVOT tubing provides excellent environmental protection



EPKT

WRAPAROUND SLEEVES

Tough, flexible, general purpose wraparound sleeves with good resistance to common fluids and solvents, excellent mechanical robustness and a high dielectric strength:

- Wraparound type **CRSM**, available for applications for cable oversheath repair
- Wraparound type **CNSM** (fabric reinforced), type **CFSM** (fabric reinforced, with Al water barrier) and type **RFSM** (fiber reinforced) available for applications for cable oversheath repair and joint re-jacketing
- 2:1 and 3:1 shrink ratio
- Fabric textile reinforced and fiber reinforced wraparound types available
- Very good chemical and solvent resistance
- Excellent physical and electrical performance



RFSM



Figure Caption: Rayfit tube used in MXSU joints – Combines 3 layered, thick-wall extrusion.

TUBING

Heat-shrinkable tubing **WCSM** designed for insulation on Low Voltage applications:

- Heavy-wall tubing **WCSM** for insulation in LV cable accessories (joints), sealing and mechanical protection on LV, MV and HV cables and accessories
- Medium-wall tubing **MWTM** for insulation in LV cable accessories (terminations), sealing and mechanical protection on LV and MV cable accessories
- Hardness harmonized with characteristics of modern cables
- Resistant to chemical agents
- Stabilized against UV rays
- Halogen-free, non-corrosive, free of lead, aluminum and heavy metals
- High tensile strength and mechanical robustness



WCSM

ARMOUR WRAP

Mechanical strength for steel wire or tape armoured cables Raychem joints incorporate a light-weight impact-resistant galvanized steel joint case which is quick to install and provides earth fault current capacity. Heat shrinkable sleeves provide outer sealing and corrosion protection of the joint.



TE Connectivity (NYSE: TEL) is a \$12 billion global technology leader. Our connectivity and sensor solutions are essential in today's increasingly connected world. We collaborate with engineers to transform their concepts into creations - redefining what's possible using intelligent, efficient and high-performing TE products and solutions proven in harsh environments. Our 72,000 people, including 7,000 design engineers, partner with customers in close to 150 countries across a wide range of industries. We believe EVERY CONNECTION COUNTS - www.TE.com.

- Mining
- Nuclear power plants
- OEMs
- Overhead distribution
- Petrochemical plants
- Railways
- Street lighting
- Substations
- Transmission lines
- Underground distribution
- Windfarms
- Solar
- Hydro-electric

WHEREVER ELECTRICITY FLOWS, YOU'LL FIND TE ENERGY



te.com/energy

FOR MORE INFORMATION:

TE Technical Support Centers

East Africa Contact:
Timothy N. Mathenge
Sales Manager East Africa Region
Office: +254 (0) 360 1900
Mobile: +254 737 863581
timothy.mathenge@te.com

West Africa Contact:
Sulaimon Lawal
Sales Manager West Africa Region
Office: +234 1 4489251-2
Mobile: +234 (0) 802 394 7345
sulaimon.lawal@te.com

South Africa Contact:
David Bavin
Sales Manager South Africa
Office: +271 163 580 75
Mobile: + 277 845 135 06
david.bavin@te.com

North Africa Contact:
Ahajri Tawfik
Sales Manager North Africa Region
Office: +33(0) 380 583 200
Mobile: +33(0) 613 704 826
tawfik.ahajri@te.com

te.com/heatshrink

© 2016 TE Connectivity Ltd. family of companies. All Rights Reserved. EPP-2563-6/16

Raychem, TE Connectivity and the TE connectivity (logo) are trademarks of the TE Connectivity Ltd. family of companies. Other logos, product and Company names mentioned herein may be trademarks of their respective owners. While TE has made every reasonable effort to ensure the accuracy of the information in this brochure, TE does not guarantee that it is error-free, nor does TE make any other representation, warranty or guarantee that the information is accurate, correct, reliable or current. TE reserves the right to make any adjustments to the information contained herein at any time without notice. TE expressly disclaims all implied warranties regarding the information contained herein, including, but not limited to, any implied warranties of merchantability or fitness for a particular purpose. The dimensions in this brochure are for reference purposes only and are subject to change without notice. Specifications are subject to change without notice. Consult TE for the latest dimensions and design specifications.