


P	LTR	DESCRIPTION	DATE	DWN	APVD
	B	INITIAL RELEASE	08JUL2020	SB	LI

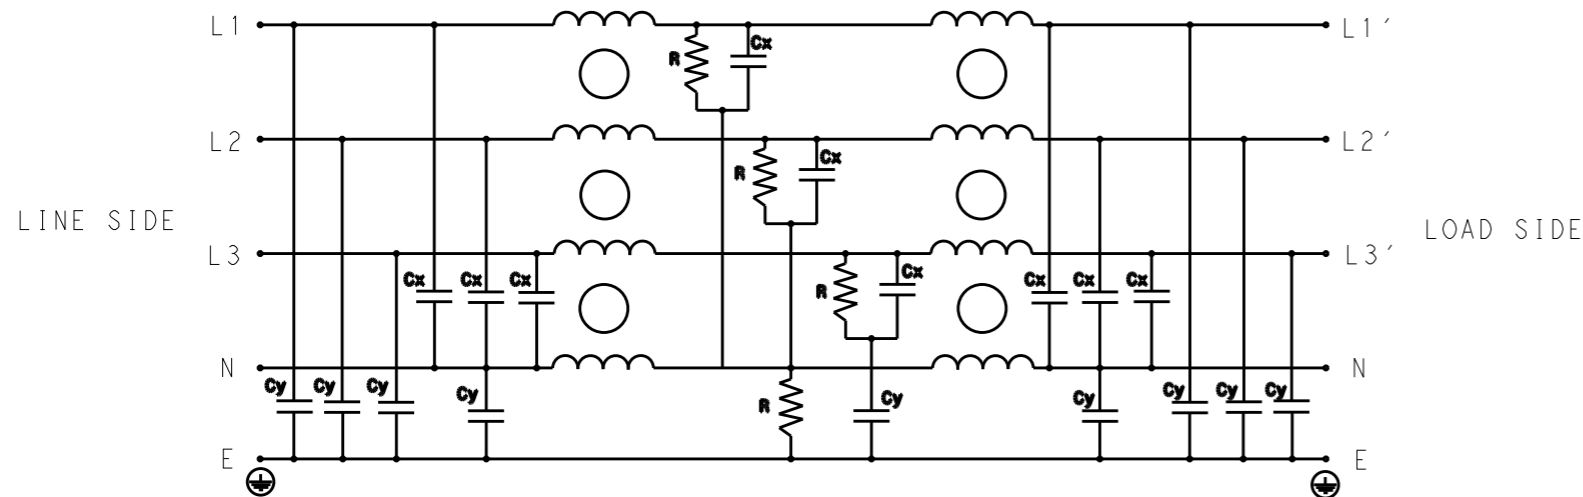

SCHEMATIC

SAFETY ORGANIZATIONS

THIS FILTER WILL BE FORMALLY RECOGNIZED, CERTIFIED OR APPROVED BY THE LISTED AGENCY. THEREFORE, ALL TEST/REQUIREMENTS SPECIFIED IN THE LATEST REVISION OF THE FOLLOWING AGENCY STANDARDS WILL BE MET:

UL RECOGNIZED* 100A 440V 50Hz/60Hz 50°C
 CSA CERTIFIED** 100A 440V 50Hz/60Hz 50°C
 *31 JULY 2020 ; **31 AUGUST 2020

OPERATING SPECIFICATION

LINE CURRENT/VOLTAGE: 100A, 440VAC
 LINE FREQUENCY: 50/60Hz

MAXIMUM LEAKAGE CURRENT: 15mA @ 230VAC, 50Hz

OPERATING AMBIENT TEMPERATURE RANGE @ RATED CURRENT: -10°C TO +50°C

IN AN AMBIENT, T_a, HIGHER THAN 50°C, THE MAXIMUM OPERATING CURRENT, I_o, IS AS FOLLOWS:

$$I_o = I_r \sqrt{\frac{105 - T_a}{55}}$$

RELIABILITY SPECIFICATIONS

STORAGE TEMPERATURE: -40°C TO +85°C
 HUMIDITY: 21 DAYS @ 40°C AND 95% RH

TEST SPECIFICATIONS

INDUCTANCE, NOMINAL: 0.2mH

CAPACITANCE @ 1kHz

LINE TO GROUND, NOMINAL: 2.89µF
 NEUTRAL TO GROUND, NOMINAL: 3.3µF
 LINE TO NEUTRAL, NOMINAL: 20.4µF

DISCHARGE RESISTOR

L/L I.R. 2MΩ 2W
 L/N I.R. 1MΩ 2W
 L/G I.R. 2MΩ 2W
 N/G I.R. 1MΩ 2W
 IR (NO DISCHARGE RESISTOR) 20°C, 50% RH AND 100VDC, MIN: 6MΩ

RECOMMENDED RECEIVING INSPECITON HIPOT


LINE TO GROUND FOR 1 MINUTE: 2632VDC
 LINE TO LINE FOR 1 MINUTE: 1892VDC
 LINE TO NEUTRAL FOR 1 MINUTE: 1093VDC

FILTER APPROVAL

THE BEST WAY TO SELECT AND QUALIFY A FILTER IS FOR YOUR ENGINEERING TO TEST THE UNIT IN YOUR EQUIPMENT.

TYPICAL INSERTION LOSS
 COMMON MODE 50/50Ω; DIFFERENTIAL MODE 50/50Ω

MHz	0.01	0.05	0.15	0.5	1	3	5	10	30
CM	23	26	27	34	29	42	56	20	14
DM	30	32	40	48	52	46	38	40	16

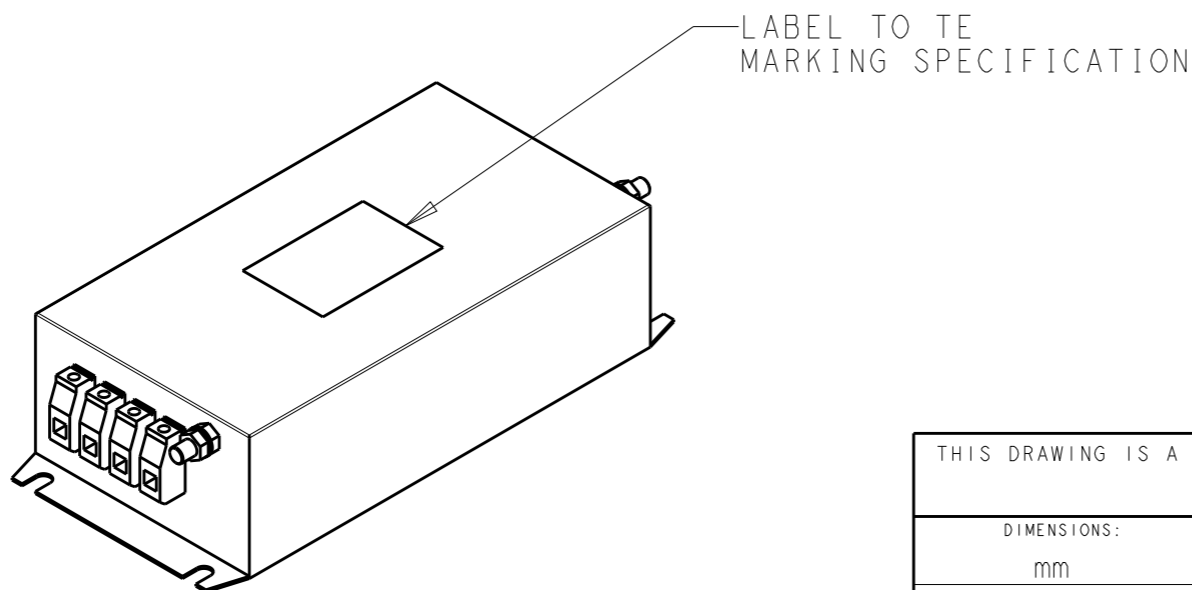

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 02MAR2020 SHRICHARANA B		TE Connectivity	
DIMENSIONS: mm		CHK 02MAR2020 LEO IRUDHAYARAJ			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD 02MAR2020 LEO IRUDHAYARAJ		NAME POWER LINE FILTER 100KEVD10AFPW	
0 PLC ±-		PRODUCT SPEC		SIZE	
1 PLC ±0.5		APPLICATION SPEC		CAGE CODE	
2 PLC ±0.40		WEIGHT		DRAWING NO	
3 PLC ±0.130		CUSTOMER DRAWING		A300779	
4 PLC ±0.0500		SCALE		1:4	
ANGLES ±-		SHEET		1 OF 2	
MATERIAL		FINISH		REV	
-		-		B	




© 2020 TE Connectivity. All Rights Reserved.



NOTE 1 GROUND CONNECTION:
 DO NOT LOOSEN INNER GROUND NUTS.
 TORQUE OUTER TERMINAL SCREWS: 2 Nm / 18 in lbs
 TORQUE GROUND NUTS: 4-10Nm

NOTE 2 INPUT OUTPUT CONNECTION TERMINAL
 AWG SIZE: 8-4 AWG
 WIRE SECTION: 25 mm²
 THREADED BOLT SIZE FOR GROUND: M10

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
		SEE SHEET 1			

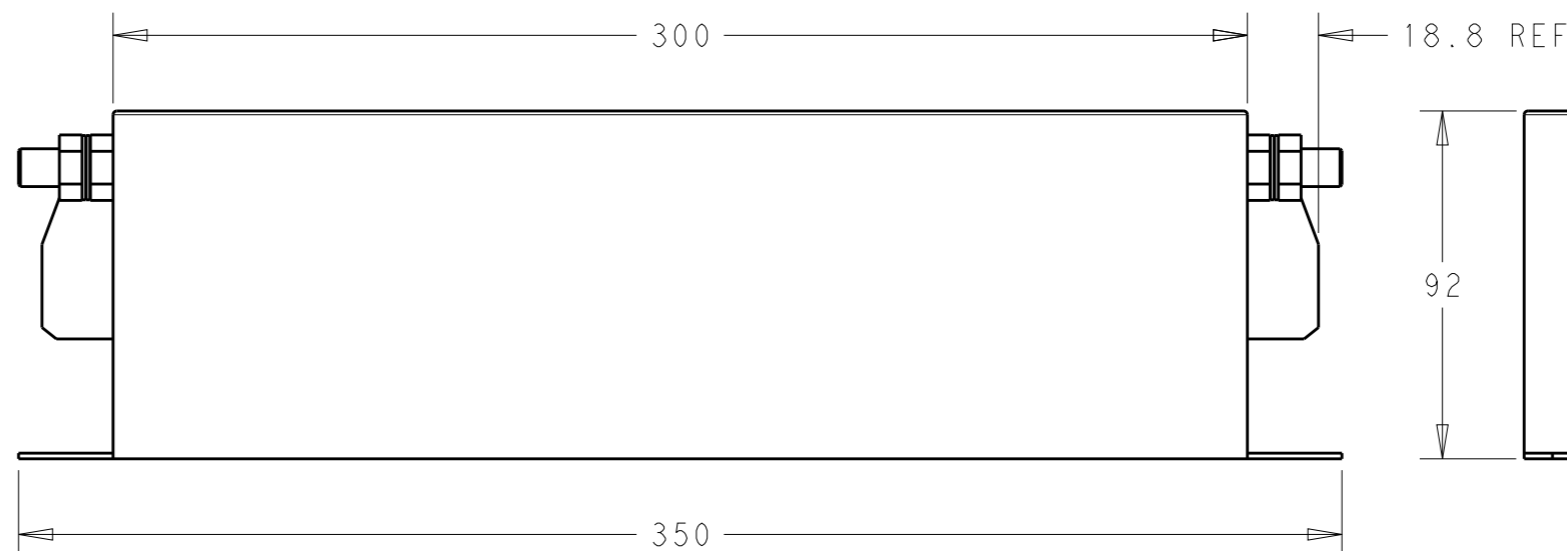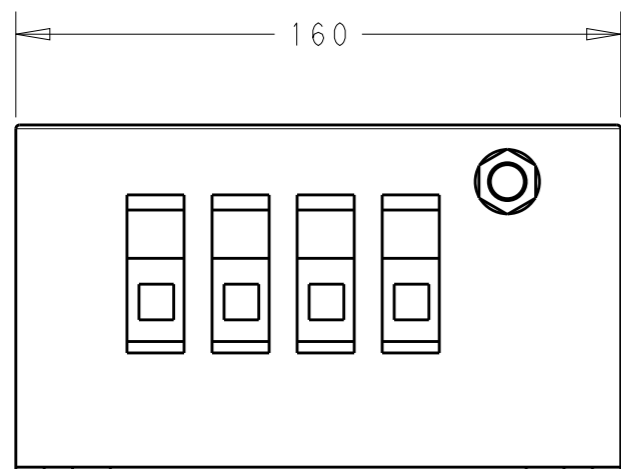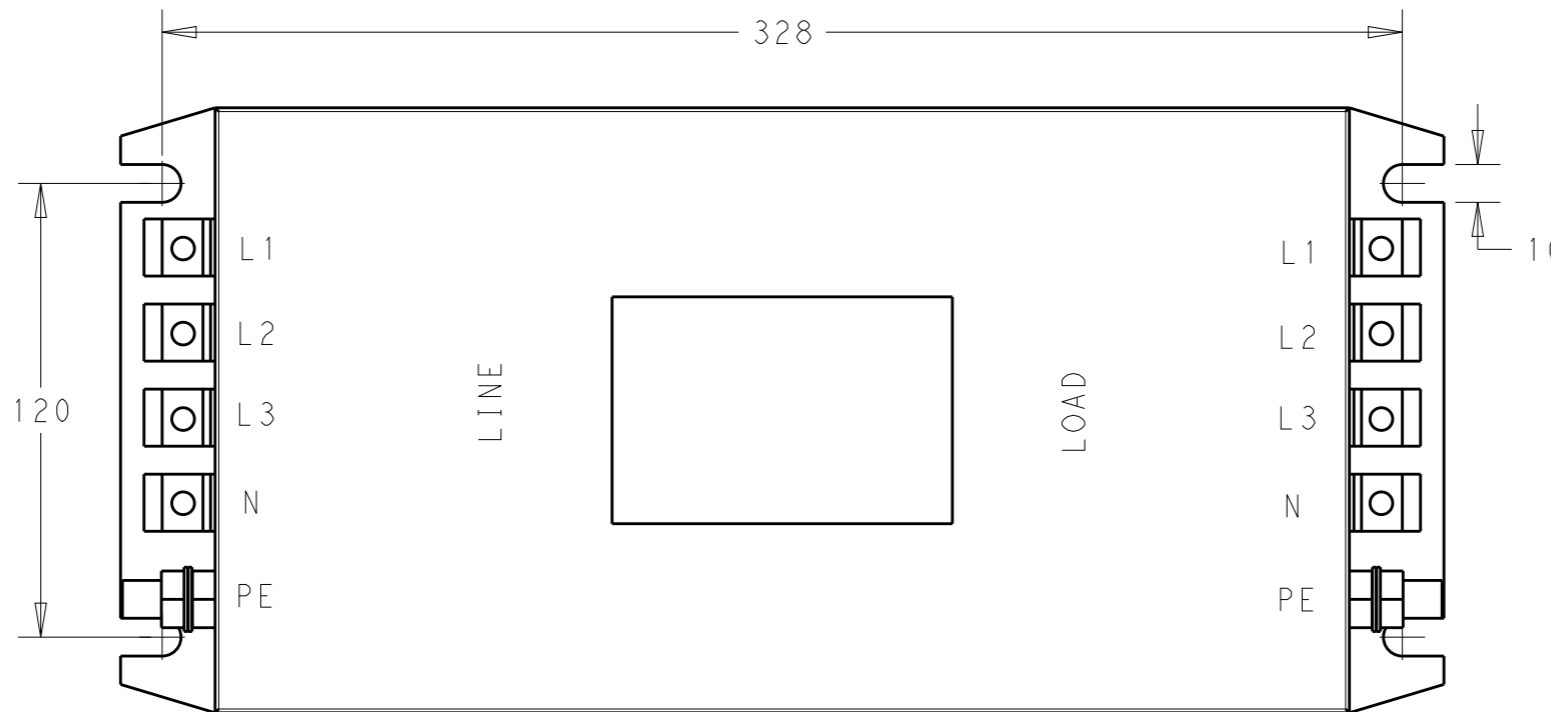

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN SHRICHARANA B 02MAR2020	 TE Connectivity	
DIMENSIONS: mm		CHK LEO IRUDHAYARAJ 02MAR2020		
		APVD LEO IRUDHAYARAJ 02MAR2020	NAME POWER LINE FILTER 100KEVD10AFPW	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		PRODUCT SPEC	RESTRICTED TO	
0 PLC ±-		APPLICATION SPEC	SIZE A3	CAGE CODE 00779
1 PLC ±0.5		WEIGHT	DRAWING NO C-1-1609998-6	
2 PLC ±0.40			SCALE 1:2	
3 PLC ±0.130			SHEET 2 OF 2	
4 PLC ±0.0500			REV B	
ANGLES ±-				
MATERIAL		CUSTOMER DRAWING		
FINISH				