




THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION


19

BY AMP INCORPORATED. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
DF	XO		0	RELEASED PER 0H14-0479-04	7-15-04	CT	FB

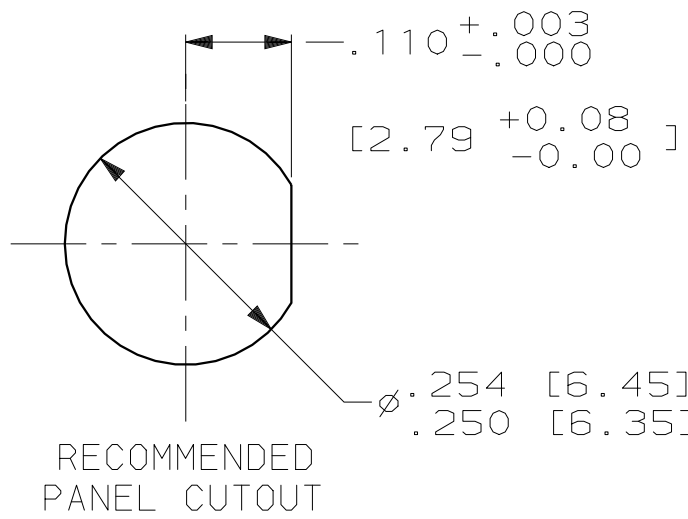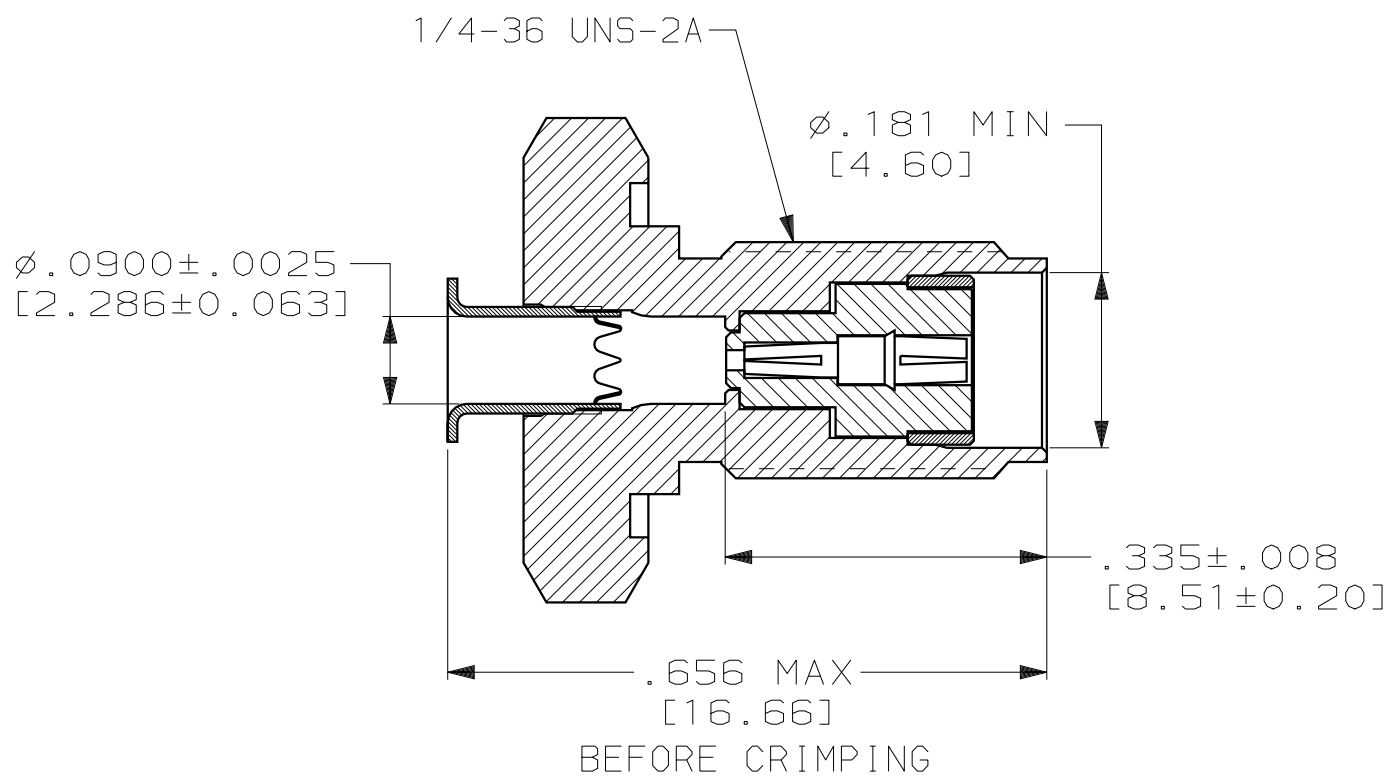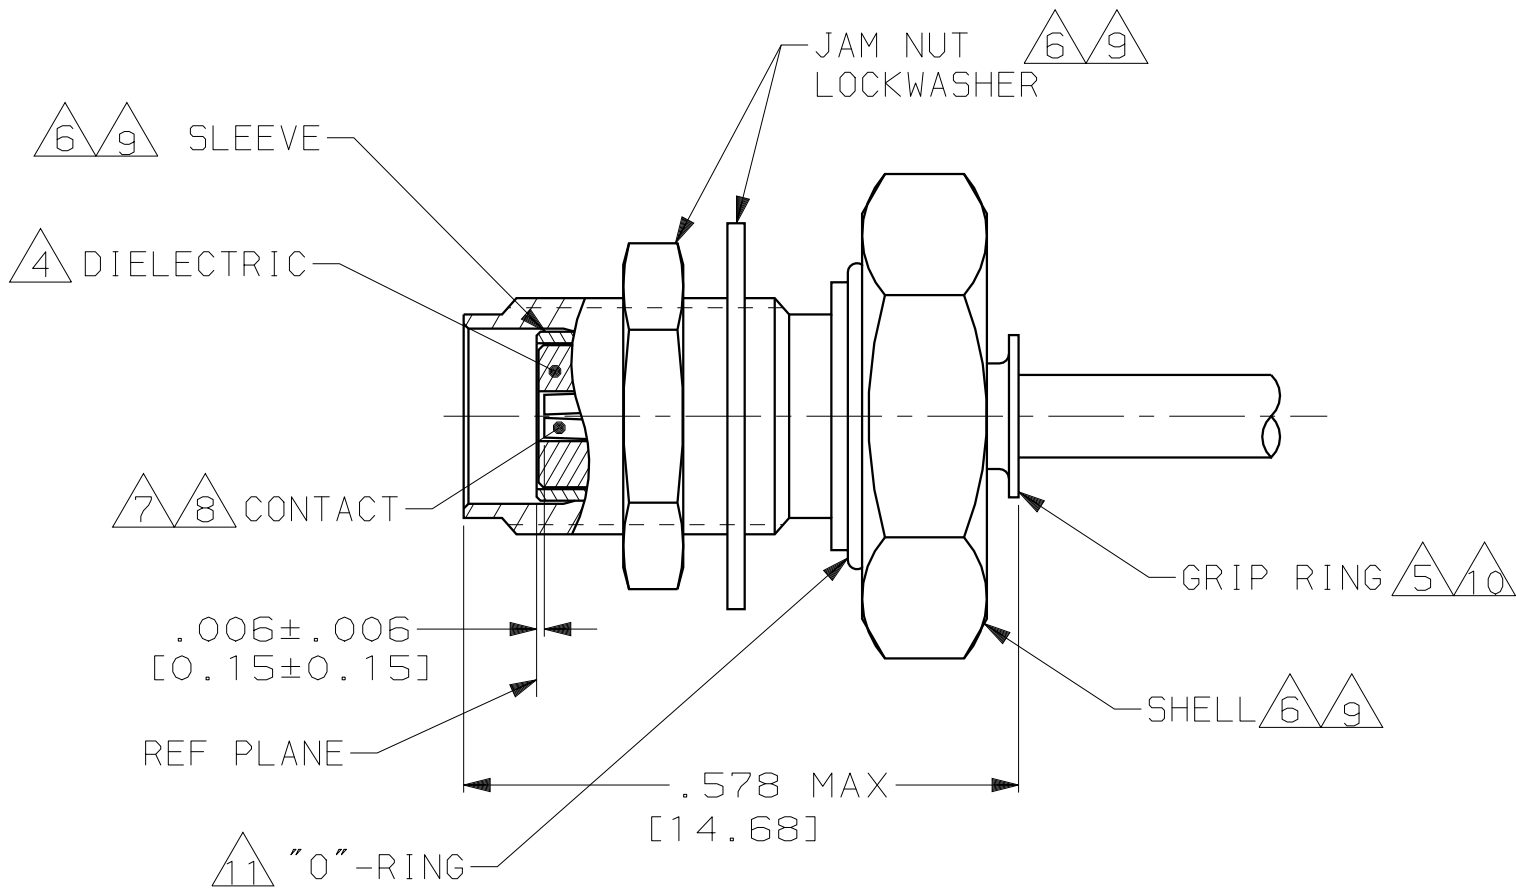

- FOR USE WITH: RG-405/U .086 [2.18] SEMI-RIGID CABLE.
- SEE INSTRUCTION SHEET 408-6788.
- .500 [12.70] MIN LENGTH OF STRAIGHT CABLE REQUIRED TO APPLY THE CONNECTOR.
- MAT'L: PTFE PER MIL-P-19468.
- MAT'L: BRASS PER MIL-C-50.
- MAT'L: STAINLESS STEEL PER ASTM-A-582.
- MAT'L: BERYLLIUM COPPER PER ASTM-B-196.
- FINISH: GOLD PLATED PER MIL-G-45204.
- FINISH: PASSIVATION PER QQ-P-35.
- FINISH: NICKEL PLATED PER QQ-N-290.
- MAT'L: SILICONE RUBBER PER ZZ-R-765A, CLASS 2B.

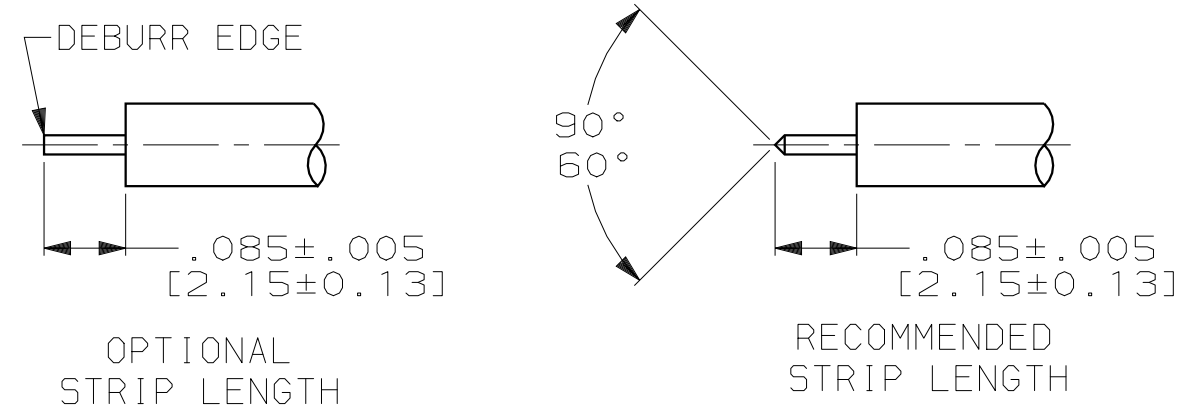

1663263-1

PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN C.C.THOMAS 7-15-04	tyco Electronics TYCO Electronics Harrisburg, PA 17105-3608		1663263-1	
DIMENSIONS: INCHES [mm]		CHK F.BLASICK 7-15-04			PART NO.	
		APVD F.BLASICK 7-15-04	NAME		JACK, BULKHEAD, MIL-F SERIES, SMA	
		PRODUCT SPEC 108-12055	SIZE		A2	
MATERIAL SEE CALLOUTS		FINISH SEE CALLOUTS	WEIGHT -		00779	
		CUSTOMER DRAWING		SCALE 5:1		SHEET 1 OF 1
				REV 0		