
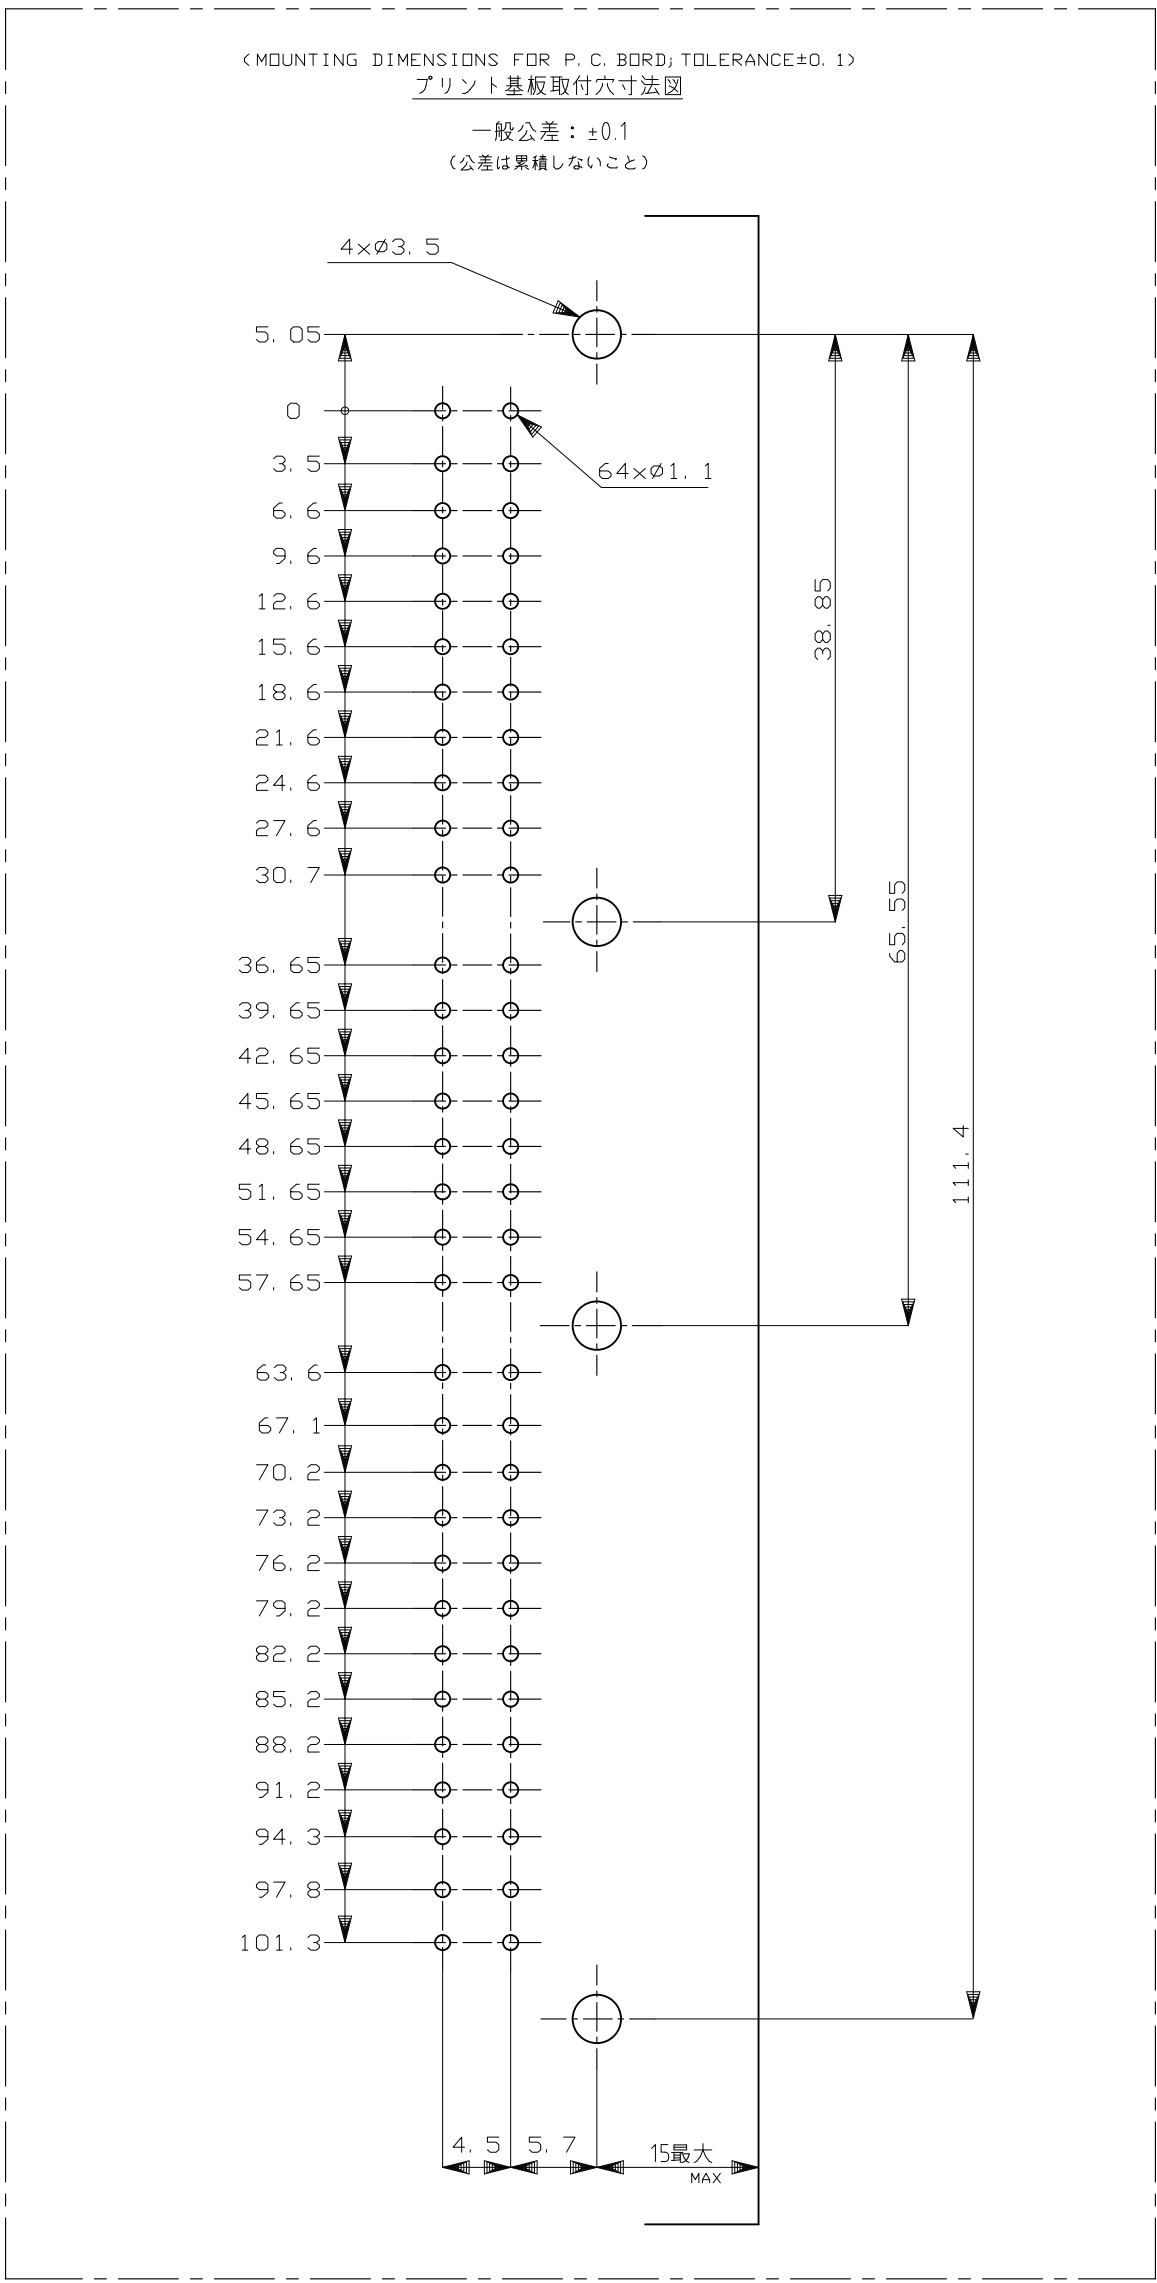
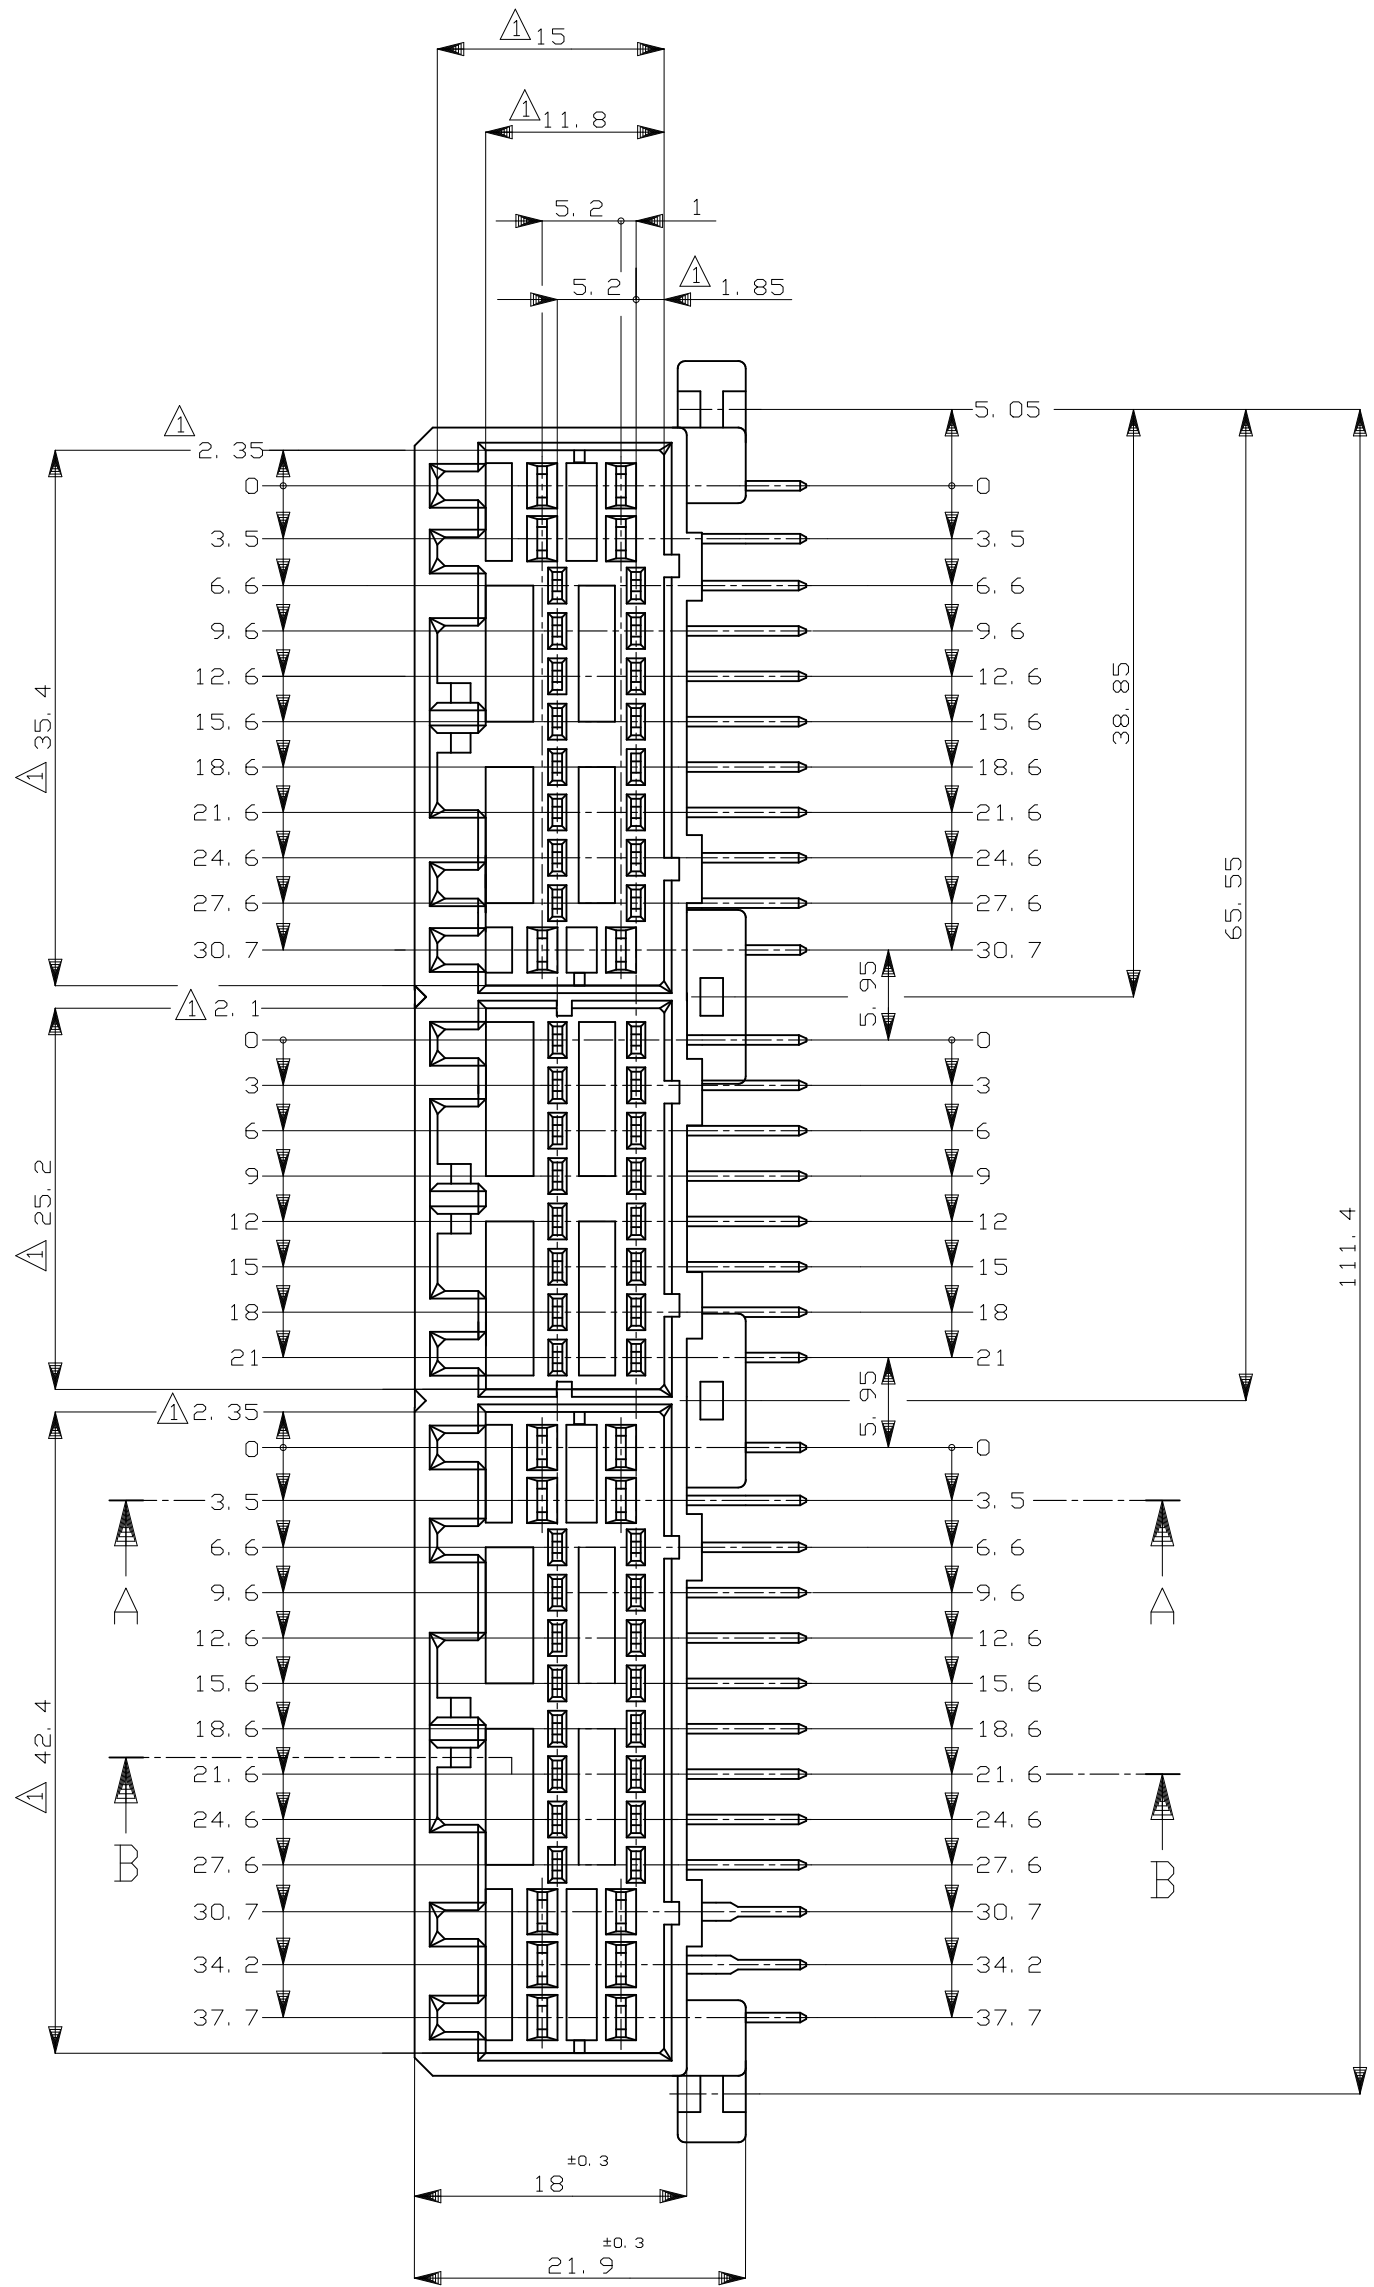
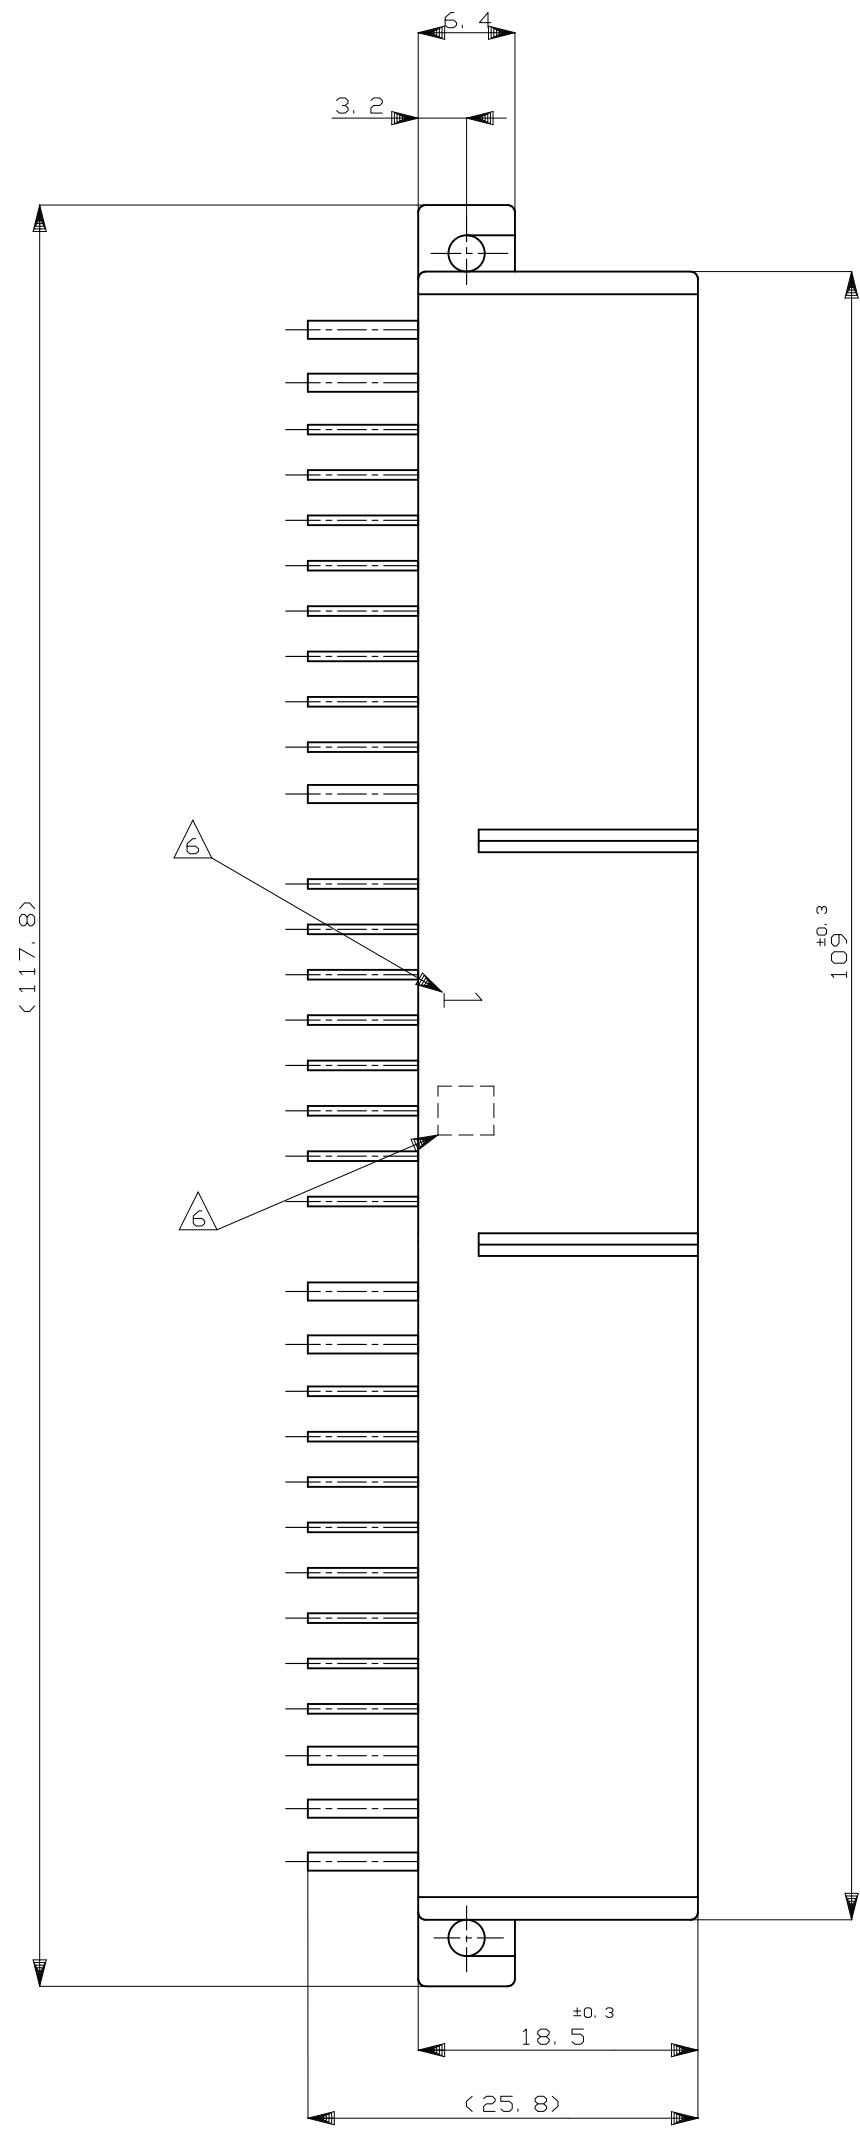


D


C

B

A

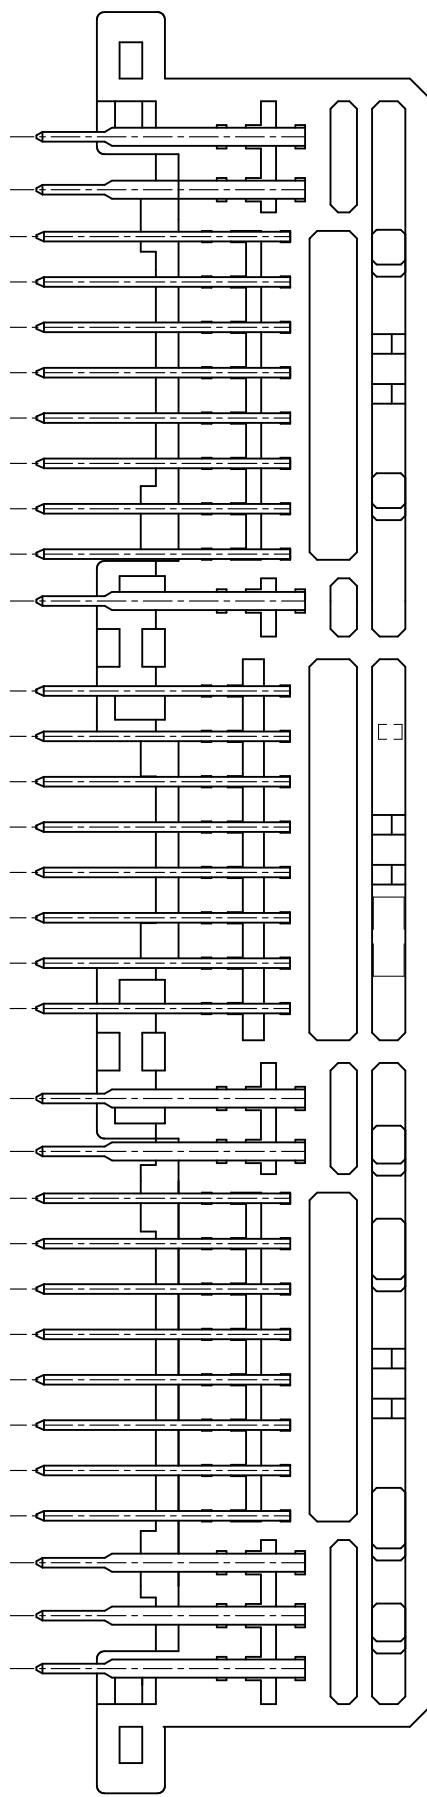

- △ □ 面から2mmの範囲で測定
2. 嵌合相手ハッジング型 174516, 174515, 174514, 917992, 917989, 917981
3. 推奨取付ねじ: JIS B1115, B1112 タッピンねじ, なべ2種
呼び径3, 長さ6mm以下 (締付けトルク: 0.4N-m (4kg-cm) 以下)
4. 適用製品規格番号: 108-5280, 108-5342
- △ 回路番号:
- パワー回路 ① ~ ①⑥
シグナル回路 ①⑦ ~ ⑥④

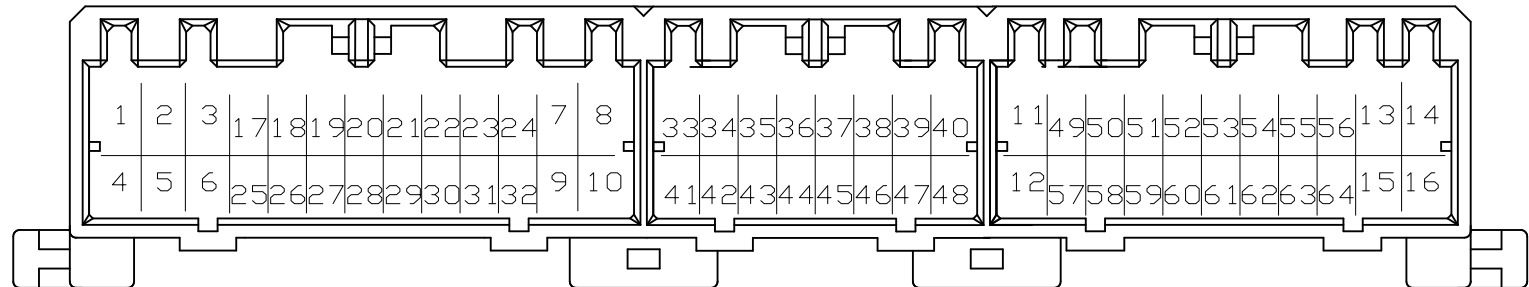

- △ 適用製品型番のプリフィックス及びIDマークを
カラーホットマークにて表示
1. MUST BE KEPT BETWEEN □ AND 2
2. THE MATING PLUG HSG.PART NUMBER:174516, 174515, 174514, 917992, 917989, 917981
3. RECOMMENDED MOUNTING SCREW,3mmDIA,6mmLENGTH(MAX.)
PAN HEAD,CLASS 2 TAPPING SCREW SPECIFIED IN JIS
B1115,B1122
(TIGHTENING TORAU,0.4N-m(4kg-cm) MAX.)
4. APPLICABLE PRODUCT SPEC NO.: 108-5280, 108-5342
- △ 回路番号
- POWER CIRCUIT NO. ① ~ ①⑥
SIGNAL CIRCUIT NO. ①⑦ ~ ⑥④
- △ INDICATED PREFIX AND ID MARK OF PRODUCT P/N BY COLOR HOT MARK

OBSOLETE	59	SELECTIVE-TIN (MATT)	SELECTIVE GOLD x 8		49~56	GRAY 灰色	9-5174518-6		
	51	SELECTIVE-TIN (MATT)	SELECTIVE GOLD x 64	1~16	17~64	GRAY 灰色	1-5174518-6		
	52	SELECTIVE-TIN (MATT)	SELECTIVE GOLD x 48		17~64	YELLOW 黄色	2-5174518-7		
OBSOLETE	59	SELECTIVE-TIN (MATT)	SELECTIVE GOLD x 8		49~56	YELLOW 黄色	9-5174518-7		
	56	SELECTIVE-TIN (MATT)	SELECTIVE GOLD x 9	14, 16	57~63	NATURAL 自然色	6-5174518-1		
	9	TIN-LEAD	SELECTIVE GOLD x 8		49~56	YELLOW 黄色	9-174518-7		
OBSOLETE	9	TIN-LEAD	SELECTIVE GOLD x 8		49~56	GRAY 灰色	9-174518-6		
	8	TIN-LEAD	SELECTIVE GOLD x 12		33, 34, 36~38, 40, 43, 50, 53~56	YELLOW 黄色	8-174518-7		
	7	TIN-LEAD	SELECTIVE GOLD x 16	-	33~40, 49~56	YELLOW 黄色	7-174518-7		
OBSOLETE	6	TIN-LEAD	SELECTIVE GOLD x 9	14, 16	57~63	NATURAL 自然色	6-174518-1		
	5	TIN-LEAD	SELECTIVE GOLD x 24	-	17~24, 33~40, 49~56	YELLOW 黄色	5-174518-7		
	4	TIN-LEAD	SELECTIVE GOLD x 22		23, 24, 31~48, 52, 57	YELLOW 黄色	4-174518-7		
OBSOLETE	3	TIN-LEAD	SELECTIVE GOLD x 52	7~10	17~64	YELLOW 黄色	3-174518-7		
	3	TIN-LEAD	SELECTIVE GOLD x 52	7~10	17~64	GRAY 灰色	3-174518-6		
	2	TIN-LEAD	SELECTIVE GOLD x 48		17~64	YELLOW 黄色	2-174518-7		
SUPERSEDED BY 2-5174518-7	2	TIN-LEAD	SELECTIVE GOLD x 48		17~64	GRAY 灰色	2-174518-6		
	2	TIN-LEAD	SELECTIVE GOLD x 48		17~64	NATURAL 自然色	2-174518-1		
	1	TIN-LEAD	SELECTIVE GOLD x 64	1~16	17~64	YELLOW 黄色	1-174518-7		
OBSOLETE	1	TIN-LEAD	SELECTIVE GOLD x 64	1~16	17~64	GRAY 灰色	1-174518-6		
	0		PRE-TIN x 64	-	-	YELLOW 黄色	174518-7		
	0		PRE-TIN x 64	-	-	GRAY 灰色	174518-6		
△ MARKING マーキング		SOLDERING SIDE 半田付け面	CONTACT SIDE 接触面側	POWER CIRCUIT NO. パワー回路	SIGNAL CIRCUIT NO. シグナル回路	COLOR 色	PART NUMBER 製品型番		
		CONTACT FINISH コンタクト仕上		GOLD PLATED CIRCUIT NO. 金めっき回路番号					
THIS DRAWING IS A CONTROLLED DOCUMENT.				DWN T. SHINOHARA CHK K. BETSUI APVD K. BETSUI	12FEB08 12FEB08 12FEB08	TE Connectivity			
DIMENSIONS: 単位: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED		PRODUCT SPEC 製品規格		64POSITION CAP HOUSING ASSEMBLY 040/070 SERIES HYBRID I/O CONNECTOR			
mm		0.15mm 1.0mm 2.0mm 3.0mm 4.0mm 5.0mm 6.0mm 7.0mm 8.0mm 9.0mm 10.0mm 11.0mm 12.0mm 13.0mm 14.0mm 15.0mm 16.0mm 17.0mm 18.0mm 19.0mm 20.0mm 21.0mm 22.0mm 23.0mm 24.0mm 25.0mm 26.0mm 27.0mm 28.0mm 29.0mm 30.0mm 31.0mm 32.0mm 33.0mm 34.0mm 35.0mm 36.0mm 37.0mm 38.0mm 39.0mm 40.0mm 41.0mm 42.0mm 43.0mm 44.0mm 45.0mm 46.0mm 47.0mm 48.0mm 49.0mm 50.0mm 51.0mm 52.0mm 53.0mm 54.0mm 55.0mm 56.0mm 57.0mm 58.0mm 59.0mm 60.0mm 61.0mm 62.0mm 63.0mm 64.0mm		APPLICATION SPEC 取付適用規格		SIZE 寸法			
GENERAL TOLERANCE 材料		FINISH 仕上		WEIGHT 重量		RESTRICTED TO			
0.0< 1.0 : ±0.2 1.0< 3.0 : ±0.25 3.0< 10.0 : ±0.3 ANGLES ±3°		HOUSING : PBT CONTACT : BRASS		A1 00779 174518		CUSTOMER DRAWING			
				SCALE 尺度		SHEET 1 OF 1			
				REV H8					