


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	F1	REVISED PER ECN-25-317457	18APR2025	TR	SKN

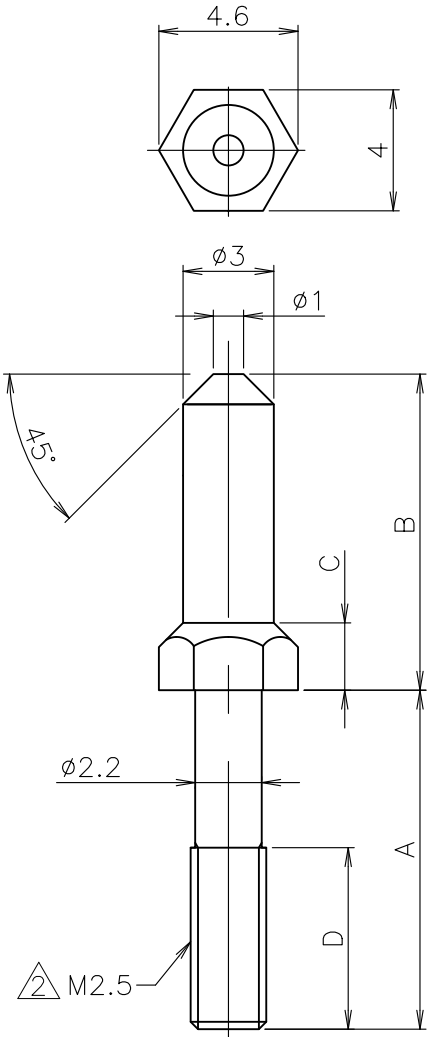

注 記

1. 材料及び仕上：黄銅、ニッケルメッキ
② ねじ部先端を除き、ゆるみ止め材料塗布
(ロックタイト DRI-LOC 202, 203 相当)

NOTE

1. MATERIAL AND FINISH BRASS,Ni PLATE
② THREADLOCKING MATERIAL APPLIED,
EXCEPT FOR THREAD TIP AREA.
(EQUIVALENT LOCTITE DRI-LOC 202, 203)

② M2.5

⑥ OBSOLETE	MAKE FROM -1	6	2.22	10.45	11.2	2-177734-1②
		4.6	2.22	10.45	5.6	177734-5
		6	3.02	11.25	10.4	177734-4
		6	3.02	11.25	7	177734-3
		6	2.22	10.45	7.8	177734-2
OBSOLETE		6	2.22	10.45	11.2	177734-1
REMARKS		D	C	B	A	P/N

TE Connectivity. All Rights Reserved.
1993

©

DIMENSIONS:		DWN	16OCT02	MATERIAL		SEE NOTE		FINISH		SEE NOTE											
mm		CHK	16OCT02	TE Connectivity																	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	16OCT02																		
0 PLC ± 0.25		PRODUCT SPEC		NAME GUIDE PIN FOR AMP DOCKING CONNECTOR																	
1 PLC ± 0.25		APPLICATION SPEC																			
2 PLC ± 0.25				SIZE		CAGE CODE		DRAWING NO		RESTRICTED TO											
3 PLC ±				A4		00779		C- 177734		—											
4 PLC ±		WEIGHT		0.000000																	
ANGLES ± 3°				CUSTOMER DRAWING						SCALE		4:1		SHEET		1 of 1		REV		F1	
