

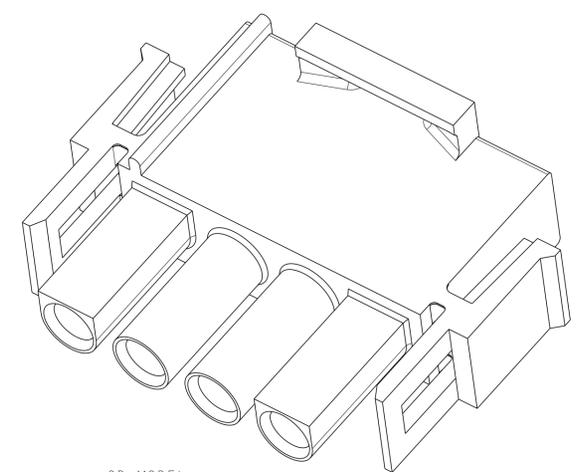
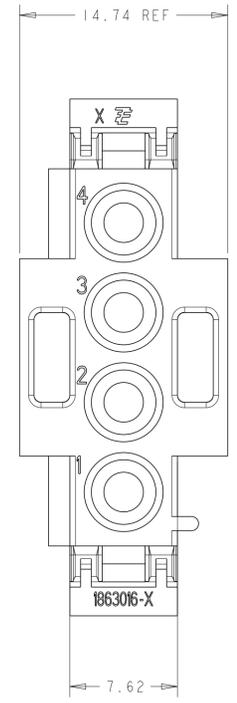
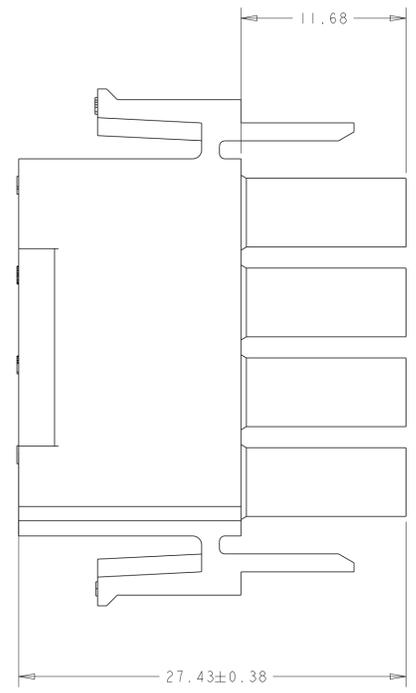


REVISIONS				
P	LTN	DESCRIPTION	DATE	APVD
A1		REVISED PER ECR-17-014951	16OCT2017	BDA KR

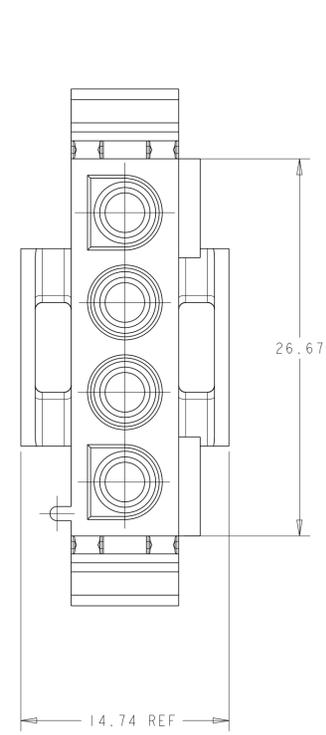

3D MODEL

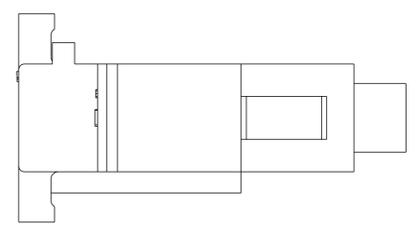

- MATES WITH APPROPRIATE UNIVERSAL MATE-N-LOK CAP OR HEADER
- SMALL NICKS ARE PERMITTED ON THE CIRCUIT TOWERS WHICH COULD INCREASE THE INITIAL HOUSING MATING FORCE BY UP TO 4.4 NEWTONS [1.0 LBS]. NO INDIVIDUAL NICKED TOWER SHALL INCREASE THIS FORCE BY OVER 2.2 NEWTONS [0.5 LBS].
- DIMENSIONS SHOWN REPRESENT PRODUCT IN DRY, AS MOLDED, CONDITION. ADDITIONAL 2% GROWTH DUE TO SUBSEQUENT MOISTURE ABSORPTION MAY OCCUR AND SHOULD BE ACCOUNTED FOR.
- GWT 750° WITHOUT FLAME ACCORDING IEC 60335-1 EDITION 06/2001

1863016-1	PA6 UL94 V2	NATURAL
PN	MATERIAL	COLOUR

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN J. SALO	23-Oct-17	TE Connectivity NAME PLUG, 4 CIRCUIT, UNIVERSAL MATE-N-LOK
DIMENSIONS:		CHK R. COPP	23-Oct-17	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD P. E. GRASSANO	23-Oct-17	PRODUCT SPEC
mm		APPLICATION SPEC		SIZE
0 PLC	±0.13	WEIGHT		CAGE CODE
1 PLC	±0.13	CUSTOMER DRAWING		DRAWING NO
2 PLC	±0.13	SCALE		4:1
3 PLC	±0.13	SHEET		1 OF 1
4 PLC	±0.13	REV		A1
ANGLES	±°	RESTRICTED TO		
FINISH	±0°30'			