THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION DEC ,2011.
© COPYRIGHT 2011 By – ALL RIGHTS RESERVED.

LOC	DIST
E	B

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	--	----	--	--	--

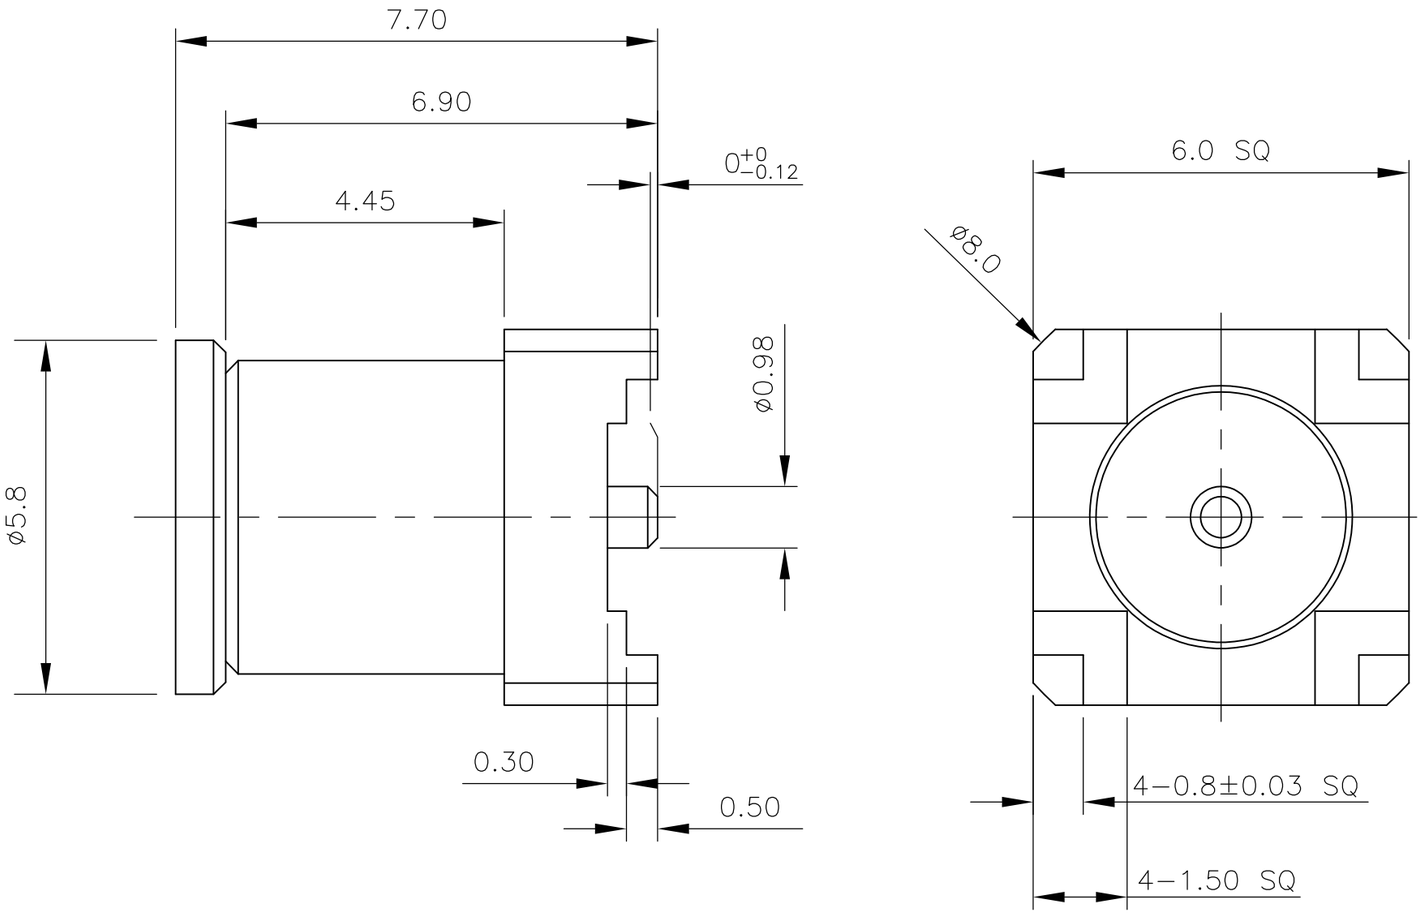

NOTES:
1.PEELING SPEED:300mm/MINUTE
2.PEELING RESISTANCE:20g~130
3.PEELING ANGLE:165 ΓX ~180 ΓX
4.ELECTRIC RATINGS

IMPENDANCE	75 OHMS
FREQUENCY RANGE	0 ~ 6 GHz
V.S.W.R.	1.2 MAX.
INSERTION LOSS	.1dB MAX./1000MHz
RF HIGH POTENTIAL @ SEA LEVEL	670 VOLTS MIN.
DIELECTRIC WITHSTANDING VOLTAGE @ SEA LEVEL	1000 VOLTS MIN.
VOLTAGE RATING @ SEA LEVEL	335 VOLTS MAX.

5. PACKING
500 PCS/REEL
2.5K PCS/SHIPPING CARTON

6. PTFE

7. BRASS

8. GOLD PLATING

9. BeCu

5	6	7 8	8 9	6	1909473−1
PACKING TYPE	DIELECTRIC	HOUSING	CENTER CONTACT	CAP	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC	± 0.5
1 PLC	± 0.35
2 PLC	± 0.25
3 PLC	± 0.05
4 PLC	± –
ANGLES	± 3°

MATERIAL: SEE TABLE

FINISH: –

DWN Titan Dai 21 JUN 2011
CHK Gary Gao 21 JUN 2011
APVD Martin Ye 21 JUN 2011
PRODUCT SPEC —
APPLICATION SPEC —
WEIGHT —

TE Connectivity

NAME: VAO ITEM,MCX JACK SMT TYPE 75 OHMS

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C-1909473	—

CUSTOMER DRAWING

SCALE	SHEET	REV
NTS	1 OF 1	A