



26

4805 (3/11)

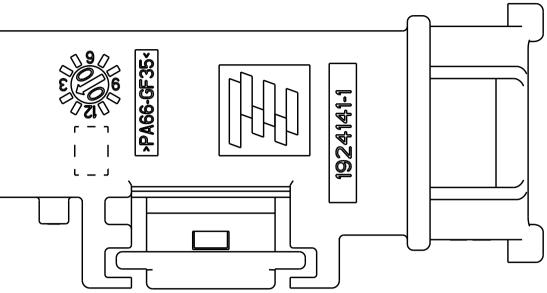

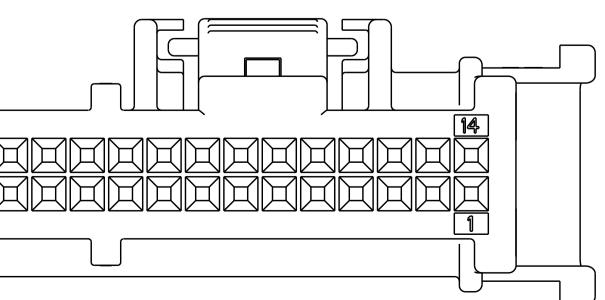


| PRELIMINARY - NOT RELEA | SED FOR PRODUCTION | NATURAL | 70 | ° O ′ F | PER DETAIL A | E A-E | - 924 4 - 0 | - |
|-------------------------|-------------------------------------|--|--------------------|--------------|------------------|---------------|-------------------|---|
| RELEAS | E D | BLUE | 20 | °O′ F | PER DETAIL E | F B-F | 924 4 -9 | - |
| PRELIMINARY - NOT RELEA | SED FOR PRODUCTION | G R A Y | 2 0 | °O′ F | PER DETAIL E | E B-E | 924 4 -8 | |
| RELEAS | E D | BLACK | 20 | °O′ F | PER DETAIL A | E A-E | 924 4 -7 | |
| PRELIMINARY - NOT RELEA | SED FOR PRODUCTION | BLUE | | ÷ . | PER DETAIL E | FB-F | 924 4 -6 | |
| PRELIMINARY - NOT RELEA | SED FOR PRODUCTION | G R A Y | | | PER DETAIL E | E B-E | 924 4 -5 | |
| PRELIMINARY - NOT RELEA | SED FOR PRODUCTION | BLACK | | | PER DETAIL A | E A-E | 924 4 -4 | |
| RELEAS | E D | BLUE | | | PER DETAIL E | F B-F | 924 4 -3 | _ |
| RELEAS | E D | G R A Y | 70 | °O′ F | PER DETAIL E | E B-E | 9 2 4 4 - 2 | |
| RELEAS | BLACK | 70 | °O′ F | PER DETAIL A | E A-E | 9 2 4 4 - | | |
| STATU | COLOR REF | WIRE | A´ EXIT GLE | KEYING | KEYING OPTION | PART NUMBER | / | |
| | CH | <u>r barker</u> 1k i 17M r hetrick | 1AR2008 1AR2008 | =7 | TE CO | onnectivity | | |
| | ±- ±0.1 ±0.05 | RHETRICKSHIELDHOUSI±-PRODUCT SPECHANDMATE, 26 PC±0.05-GENERATION Y, 0.±0.005APPLICATION SPEC | | | |)SITION, | | |
| | ANGLES MATERIAL FINISH - - | - | USTOMER_DRAWII | 7 3 1 | 00779C-19 | 2444 | | _ |
| | | CI | OUTOMEN DRAWT | | | 4:1 | | |


| | | 2 | | | | 1 | | |
|-----|----|------|---|-----|---------------------------|-----------|-----|------|
| LOC | | DIST | | | REVISIONS | | | |
| | ΙN | 00 | Р | LTR | DESCRIPTION | DATE | DWN | APVD |
| | | | | A 2 | REVISED PER ECO-08-022333 | 08SEP2008 | DLD | CJS |
| | | | | A 3 | REVISED PER ECO-13-004668 | I8MAR20I3 | DLD | CJS |
| | | | | A 4 | ECO-17-012938 | 06SEP2017 | KP | CS |
| | | | | A 5 | REV PER ECO-20-015934 | 19NOV2020 | RGV | CS |
| | | | | | | 1 | | |

A MATERIAL: SHIELD HOUSING: NYLON 6/6, COLOR - SEE TABLE.

3

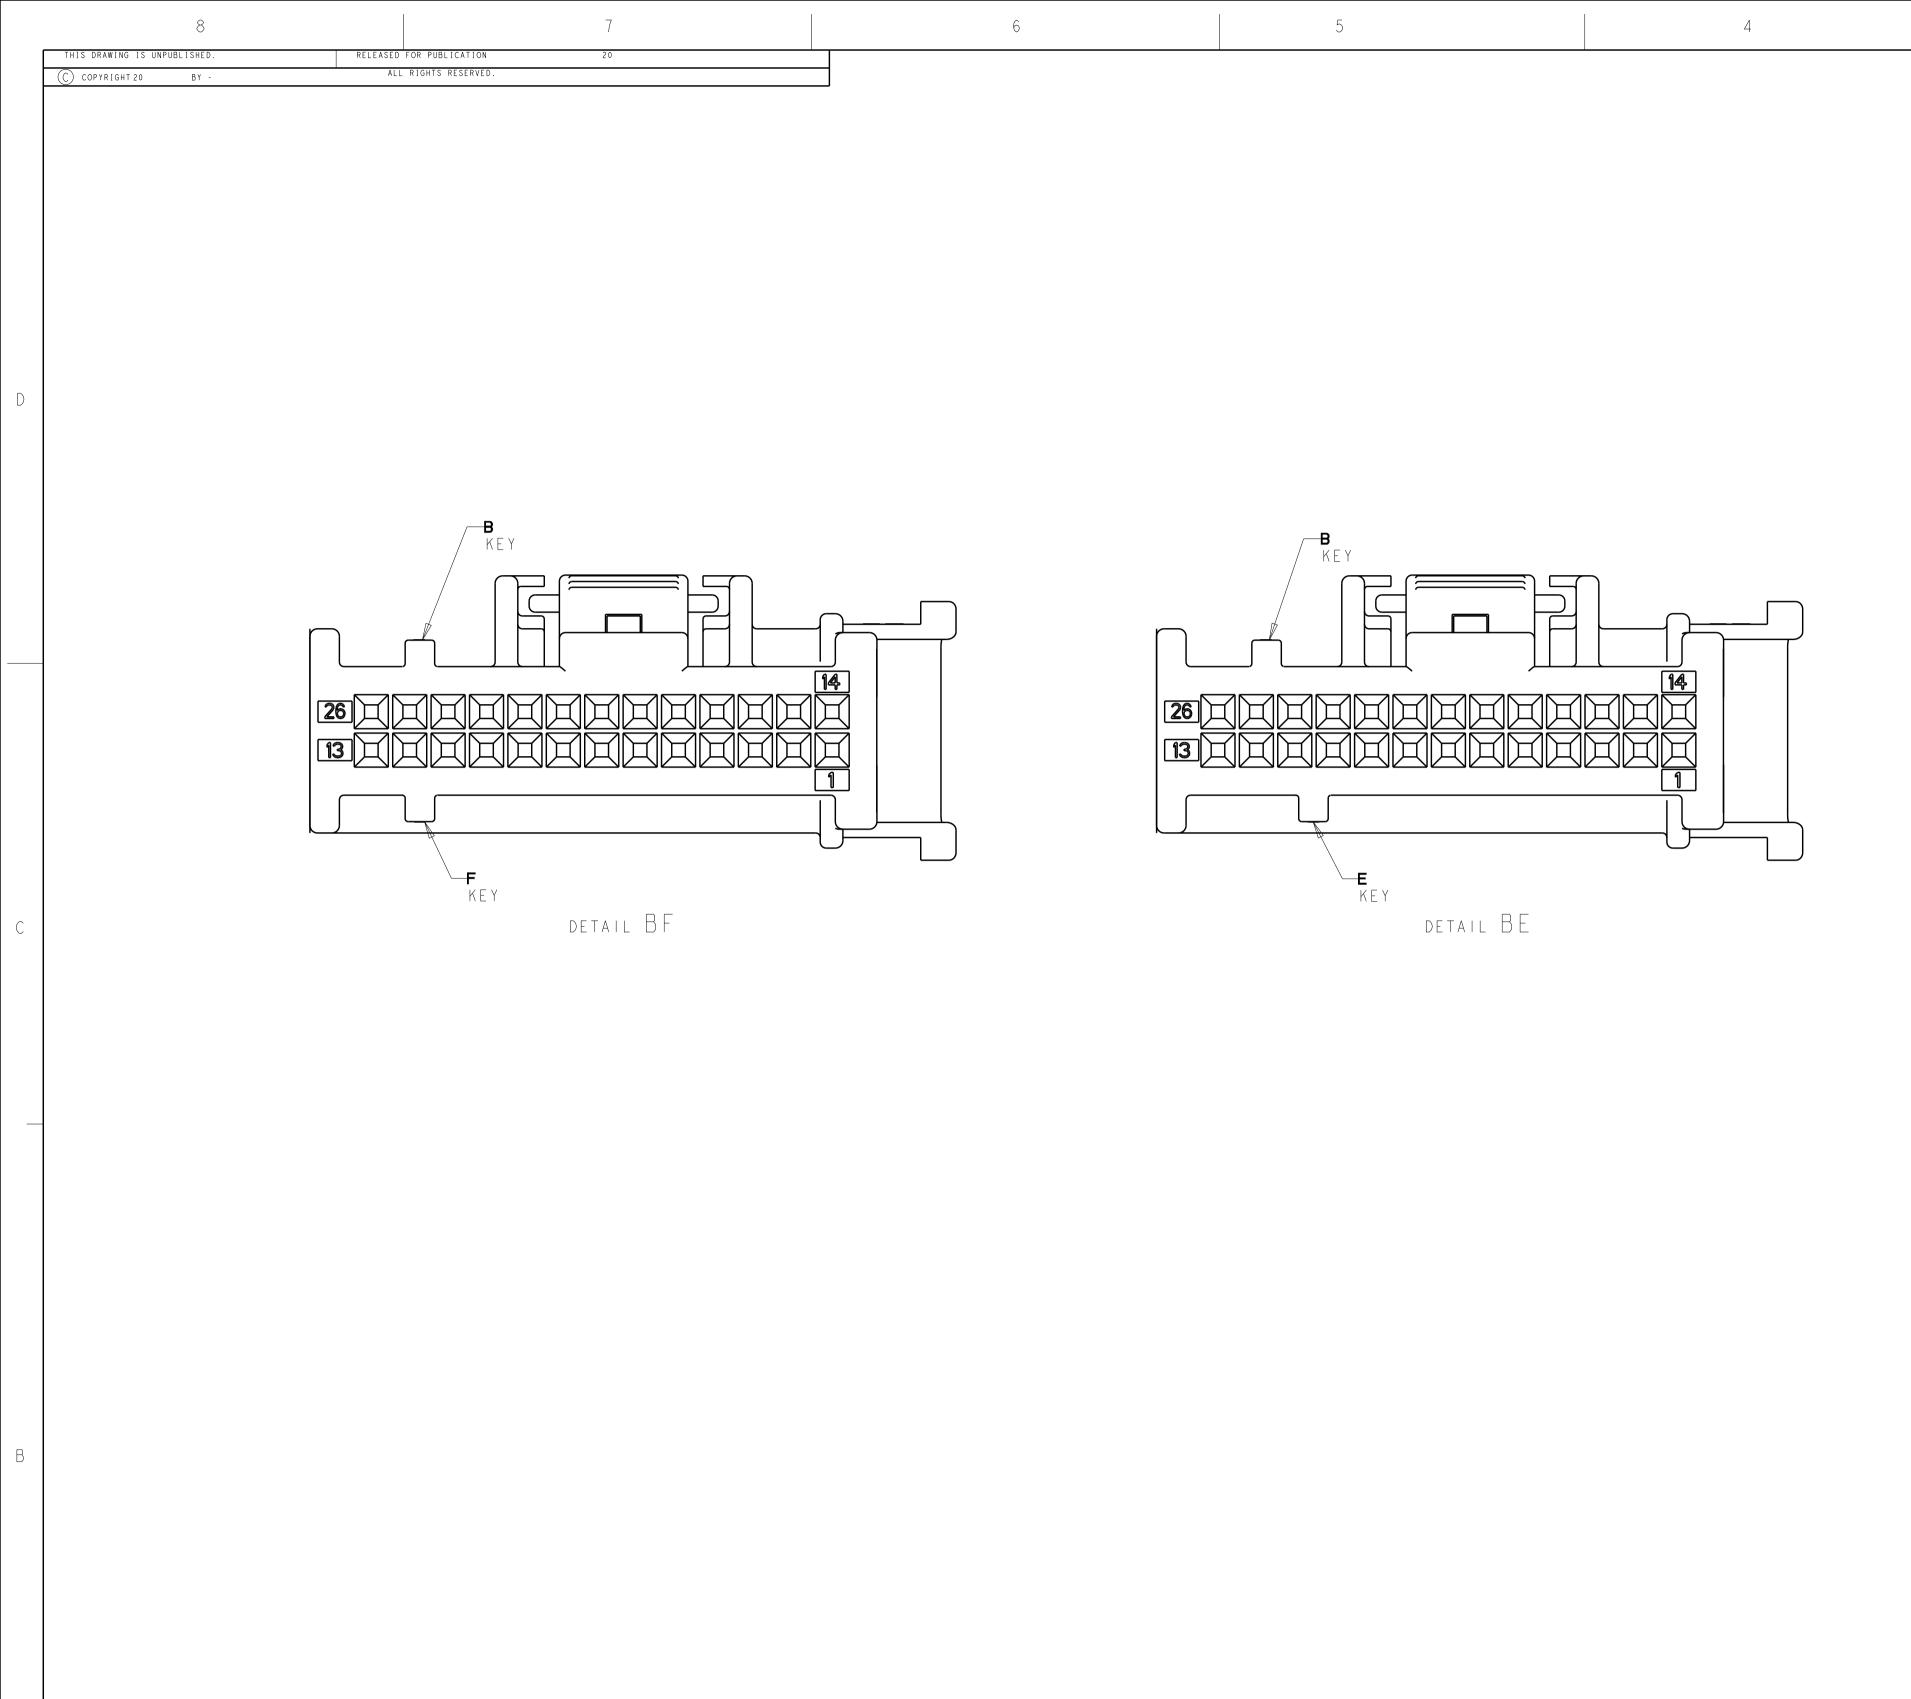

4805 (3/11)

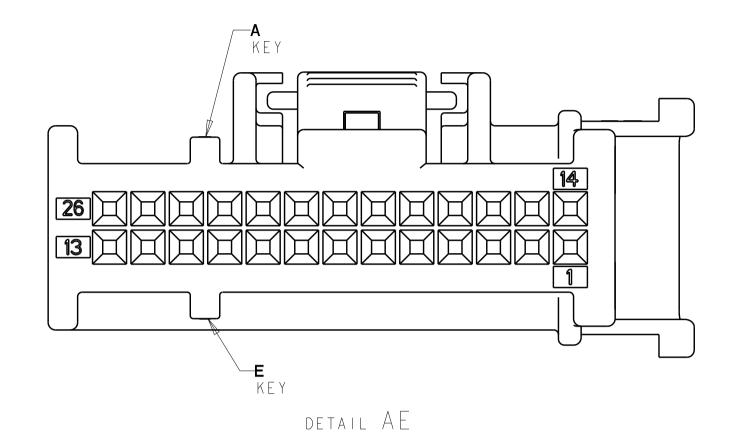

| THIS DRAWING IS A |
|-------------------------------|
| |
| DIMENSIONS: |
| mm |
| |
| |
| \downarrow \downarrow $-$ |
| MATERIAL |
| - |
| _ |

3

| | 2 | | | 1 | | | |
|-----|------|---|-----|-------------|----------|-----|------|
| LOC | DIST | | | REVISIONS | | | |
| ΙN | 00 | Р | LTR | DESCRIPTION | DATE | DWN | APVD |
| | | | - | SEE SHEET I | - | - | - |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | - | | <u>.</u> | | |

| A (| CONTROLLED DOCUMENT. | DWN 17MAR2008 <u>R BARKER</u> снк 17MAR2008 | TE Connectivity |
|-----|--|---|---|
| | TOLERANCES UNLESS OTHERWISE SPECIFIED: | R HETRICK | |
| | | R HETRICK PRODUCT SPEC | SHIELD HOUSING, |
| _ | 0 PLC ±- 1 PLC ±0.1 2 PLC ±0.05 | - | HAND MATE, 26 POSITION, |
| | 2 FLC ±0.03 3 FLC ±0.005 4 FLC ±0.0001 | APPLICATION SPEC | GENERATION Y, 0.64mm LAC |
| | 4 FLC ±0.0001 ANGLES ±- FINISH | - WEIGHT | |
| | - | | A 00779 C = 1924141 - 00779 C = 19279 C = 1924141 - 00779 C = 1924141 - 00779 C = 19279 C = |
| | | CUSTOMER DRAWING | SCALE 4:1 SHEET 2 OF 2 REVA5 |

В

D