


LOC		DIST		REVISIONS					
CM	00	P	LTR	DESCRIPTION		DATE	DWN	APVD	
			A2	REVISED PER ECR-17-015922		07NOV2017	BDA	KR	

D




C

B


A

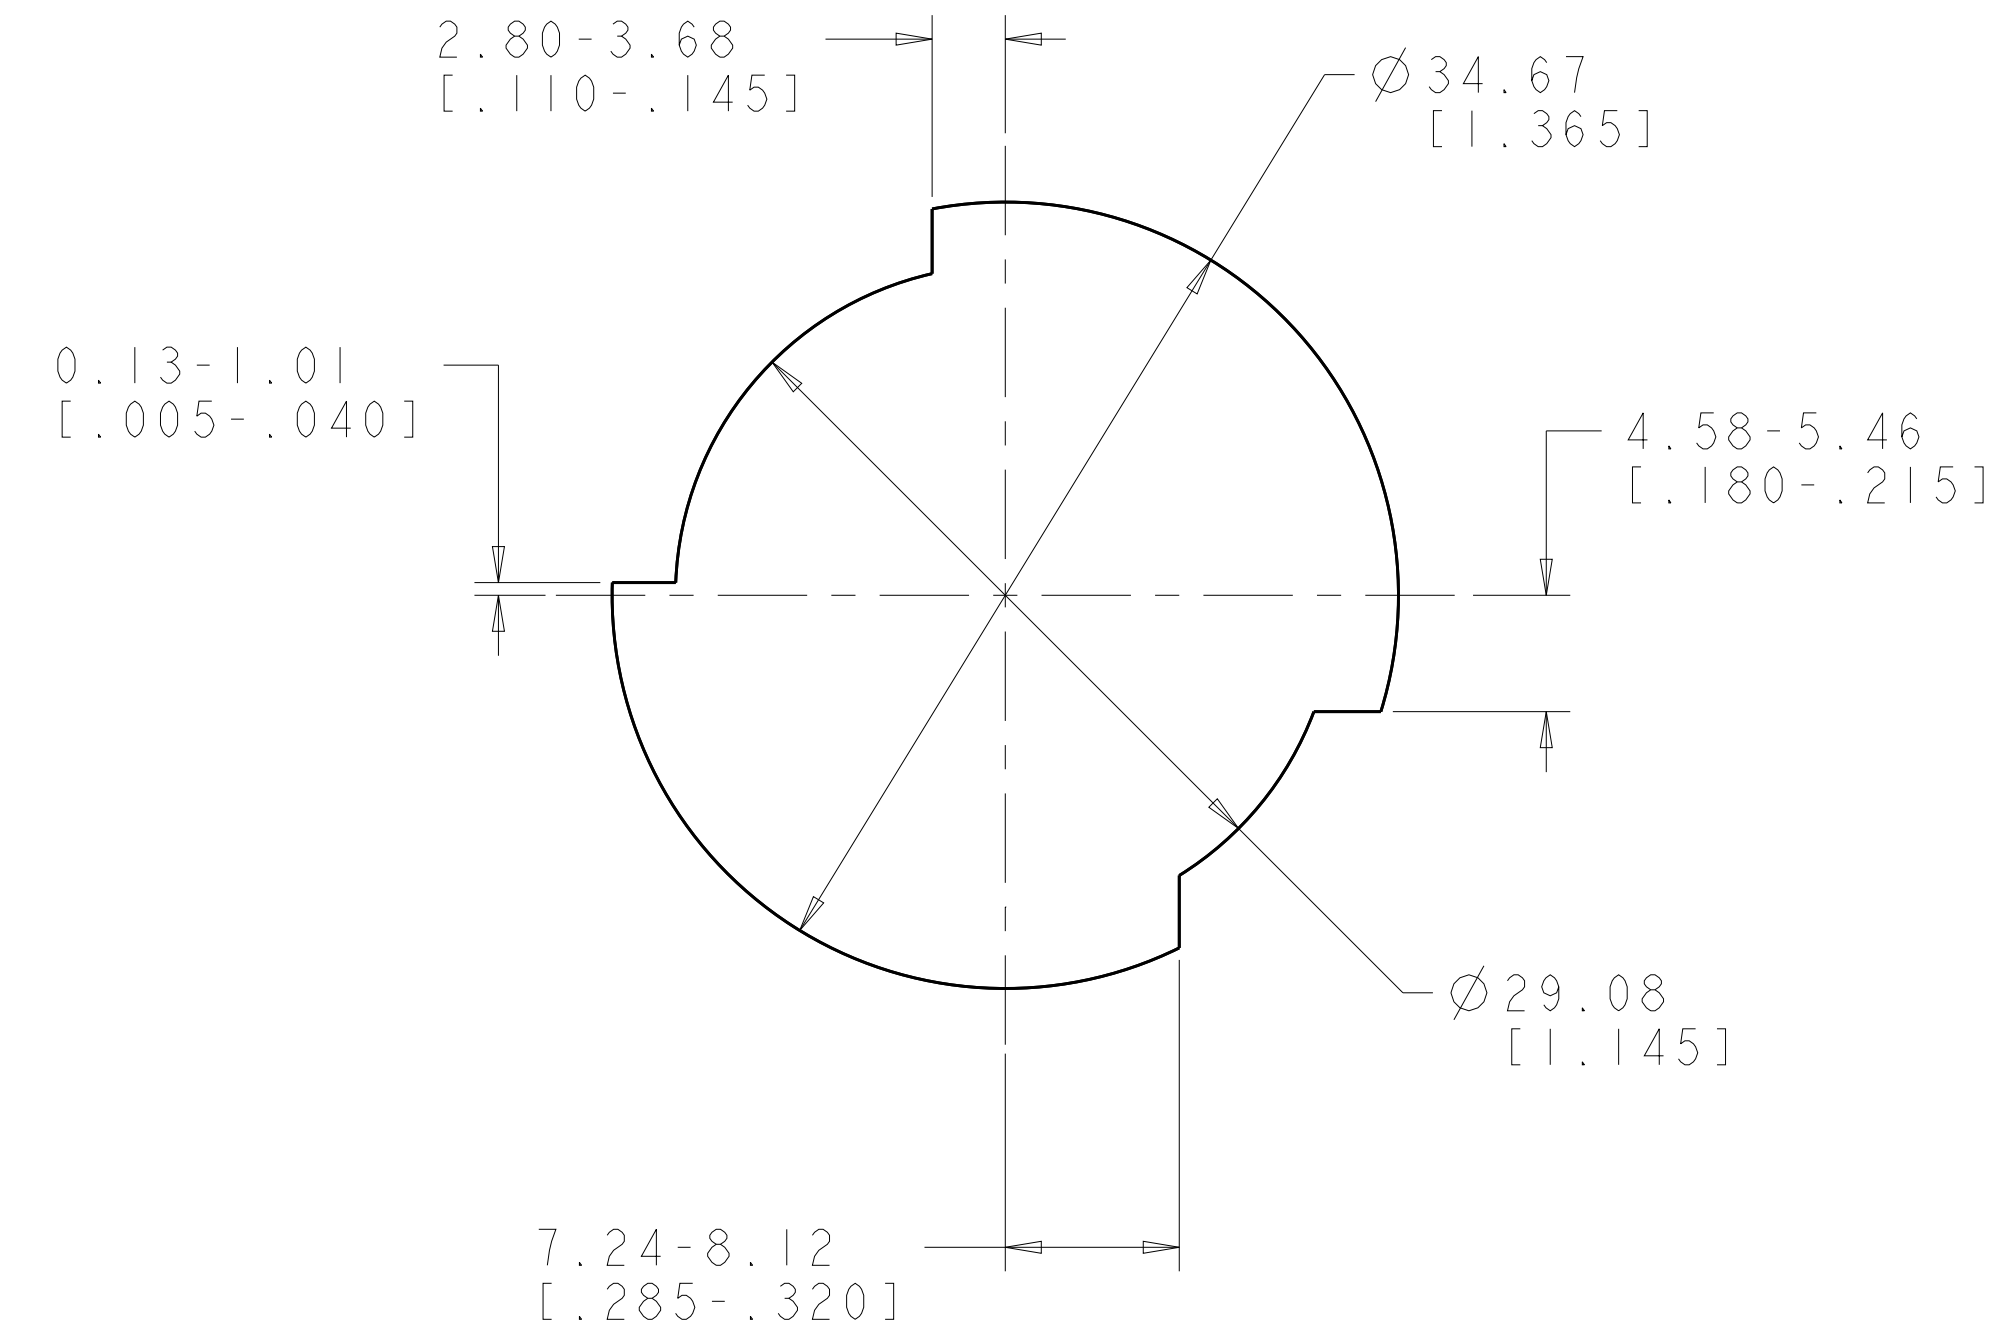


RECOMMENDED CUT OUT

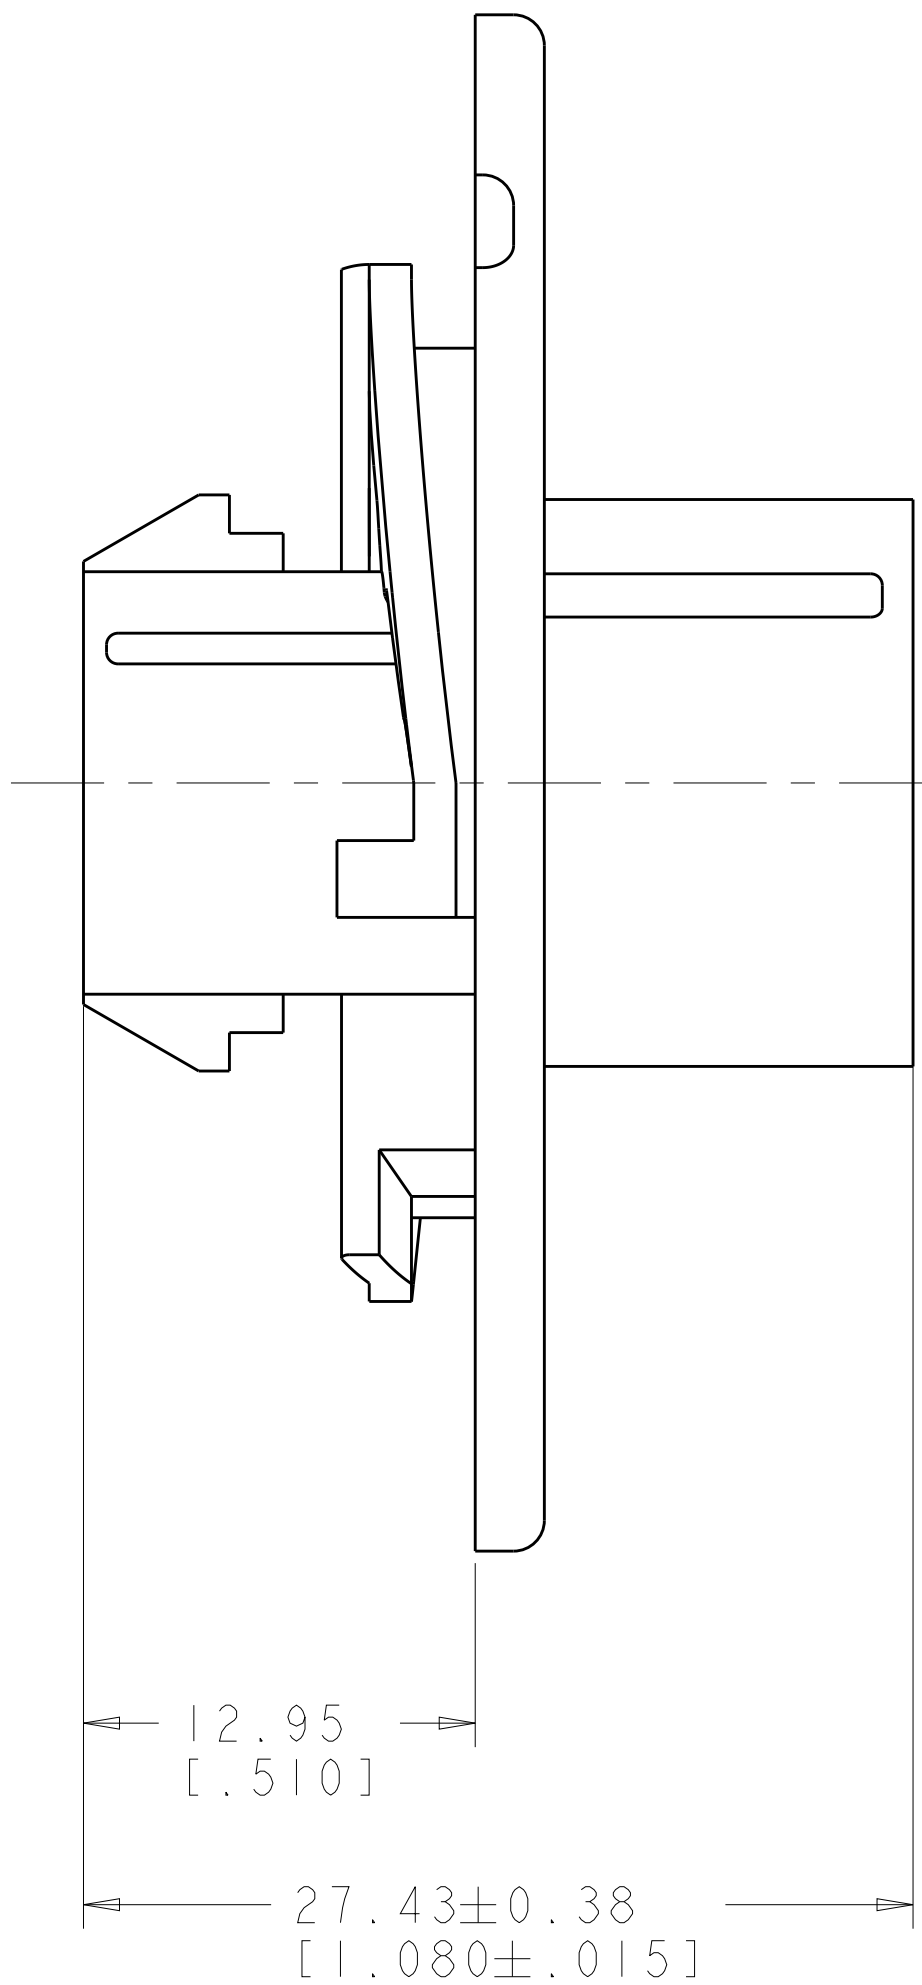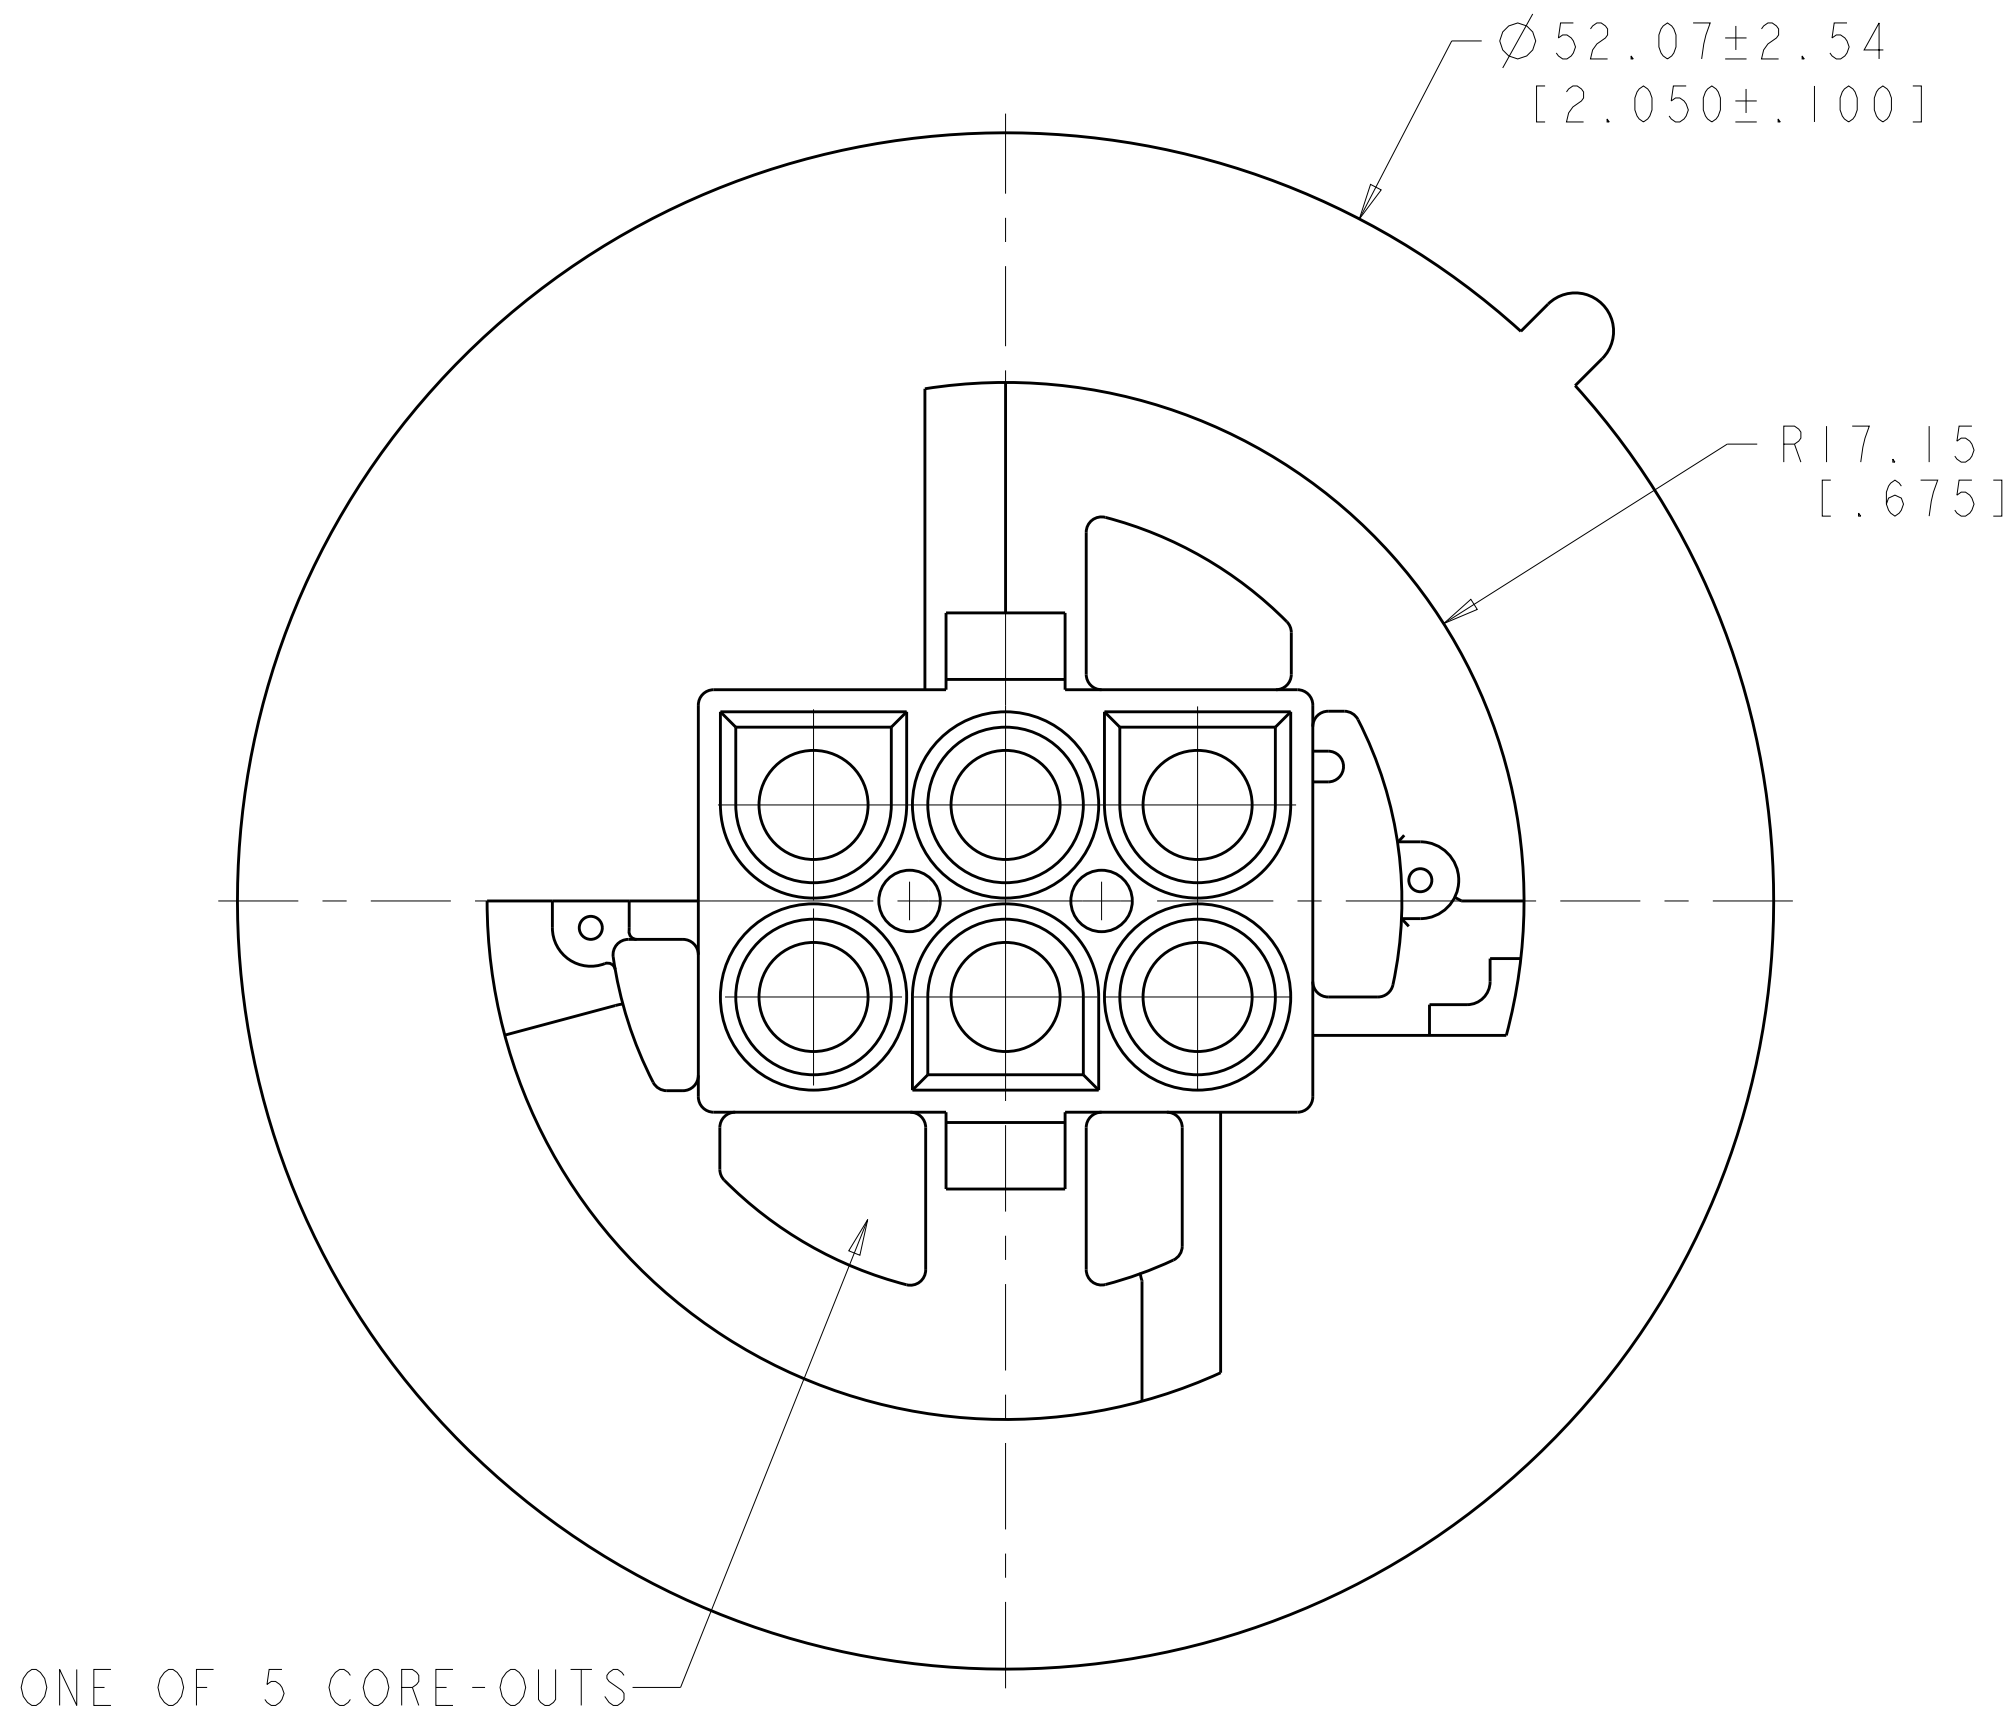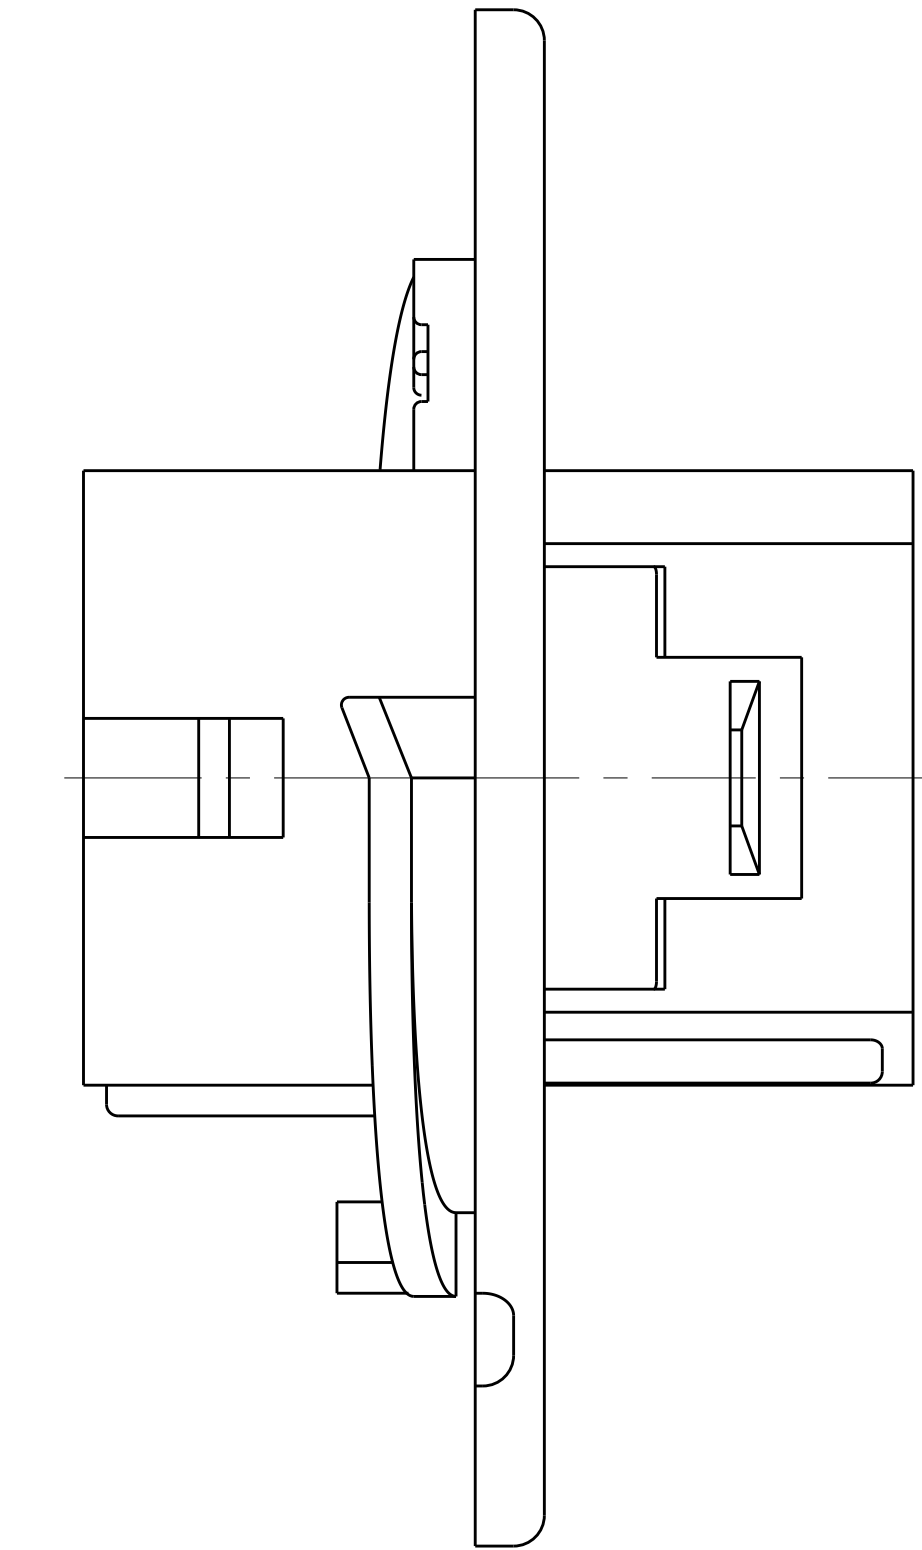



1. MATES WITH APPROPRIATE UNIVERSAL MATE-N-LOK <sup>TM</sup> PLUG.
2. RECOMMENDED PANEL THICKNESS 0.76-2.29 [.030-.090].
3. PANEL MUST BE PUNCHED SO THAT THE HOUSING ENTERS THE PANEL IN THE SAME DIRECTION AS THE PUNCH.
4. DIMENSIONS SHOWN REPRESENT PRODUCT IN DRY, AS MOLDED, CONDITION. ADDITIONAL 2% GROWTH DUE TO SUBSEQUENT MOISTURE ABSORPTION MAY OCCUR AND SHOULD BE ACCOUNTED FOR.
5. FUNCTIONAL PART REQUIRES APPROPRIATE CONTACTS AND 2029269-1

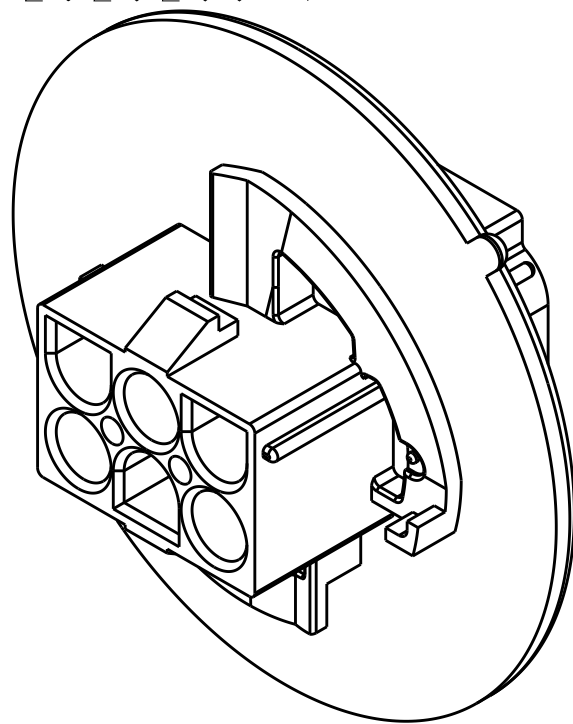

3-DIMENSIONAL MODEL  
SCALE 2:1

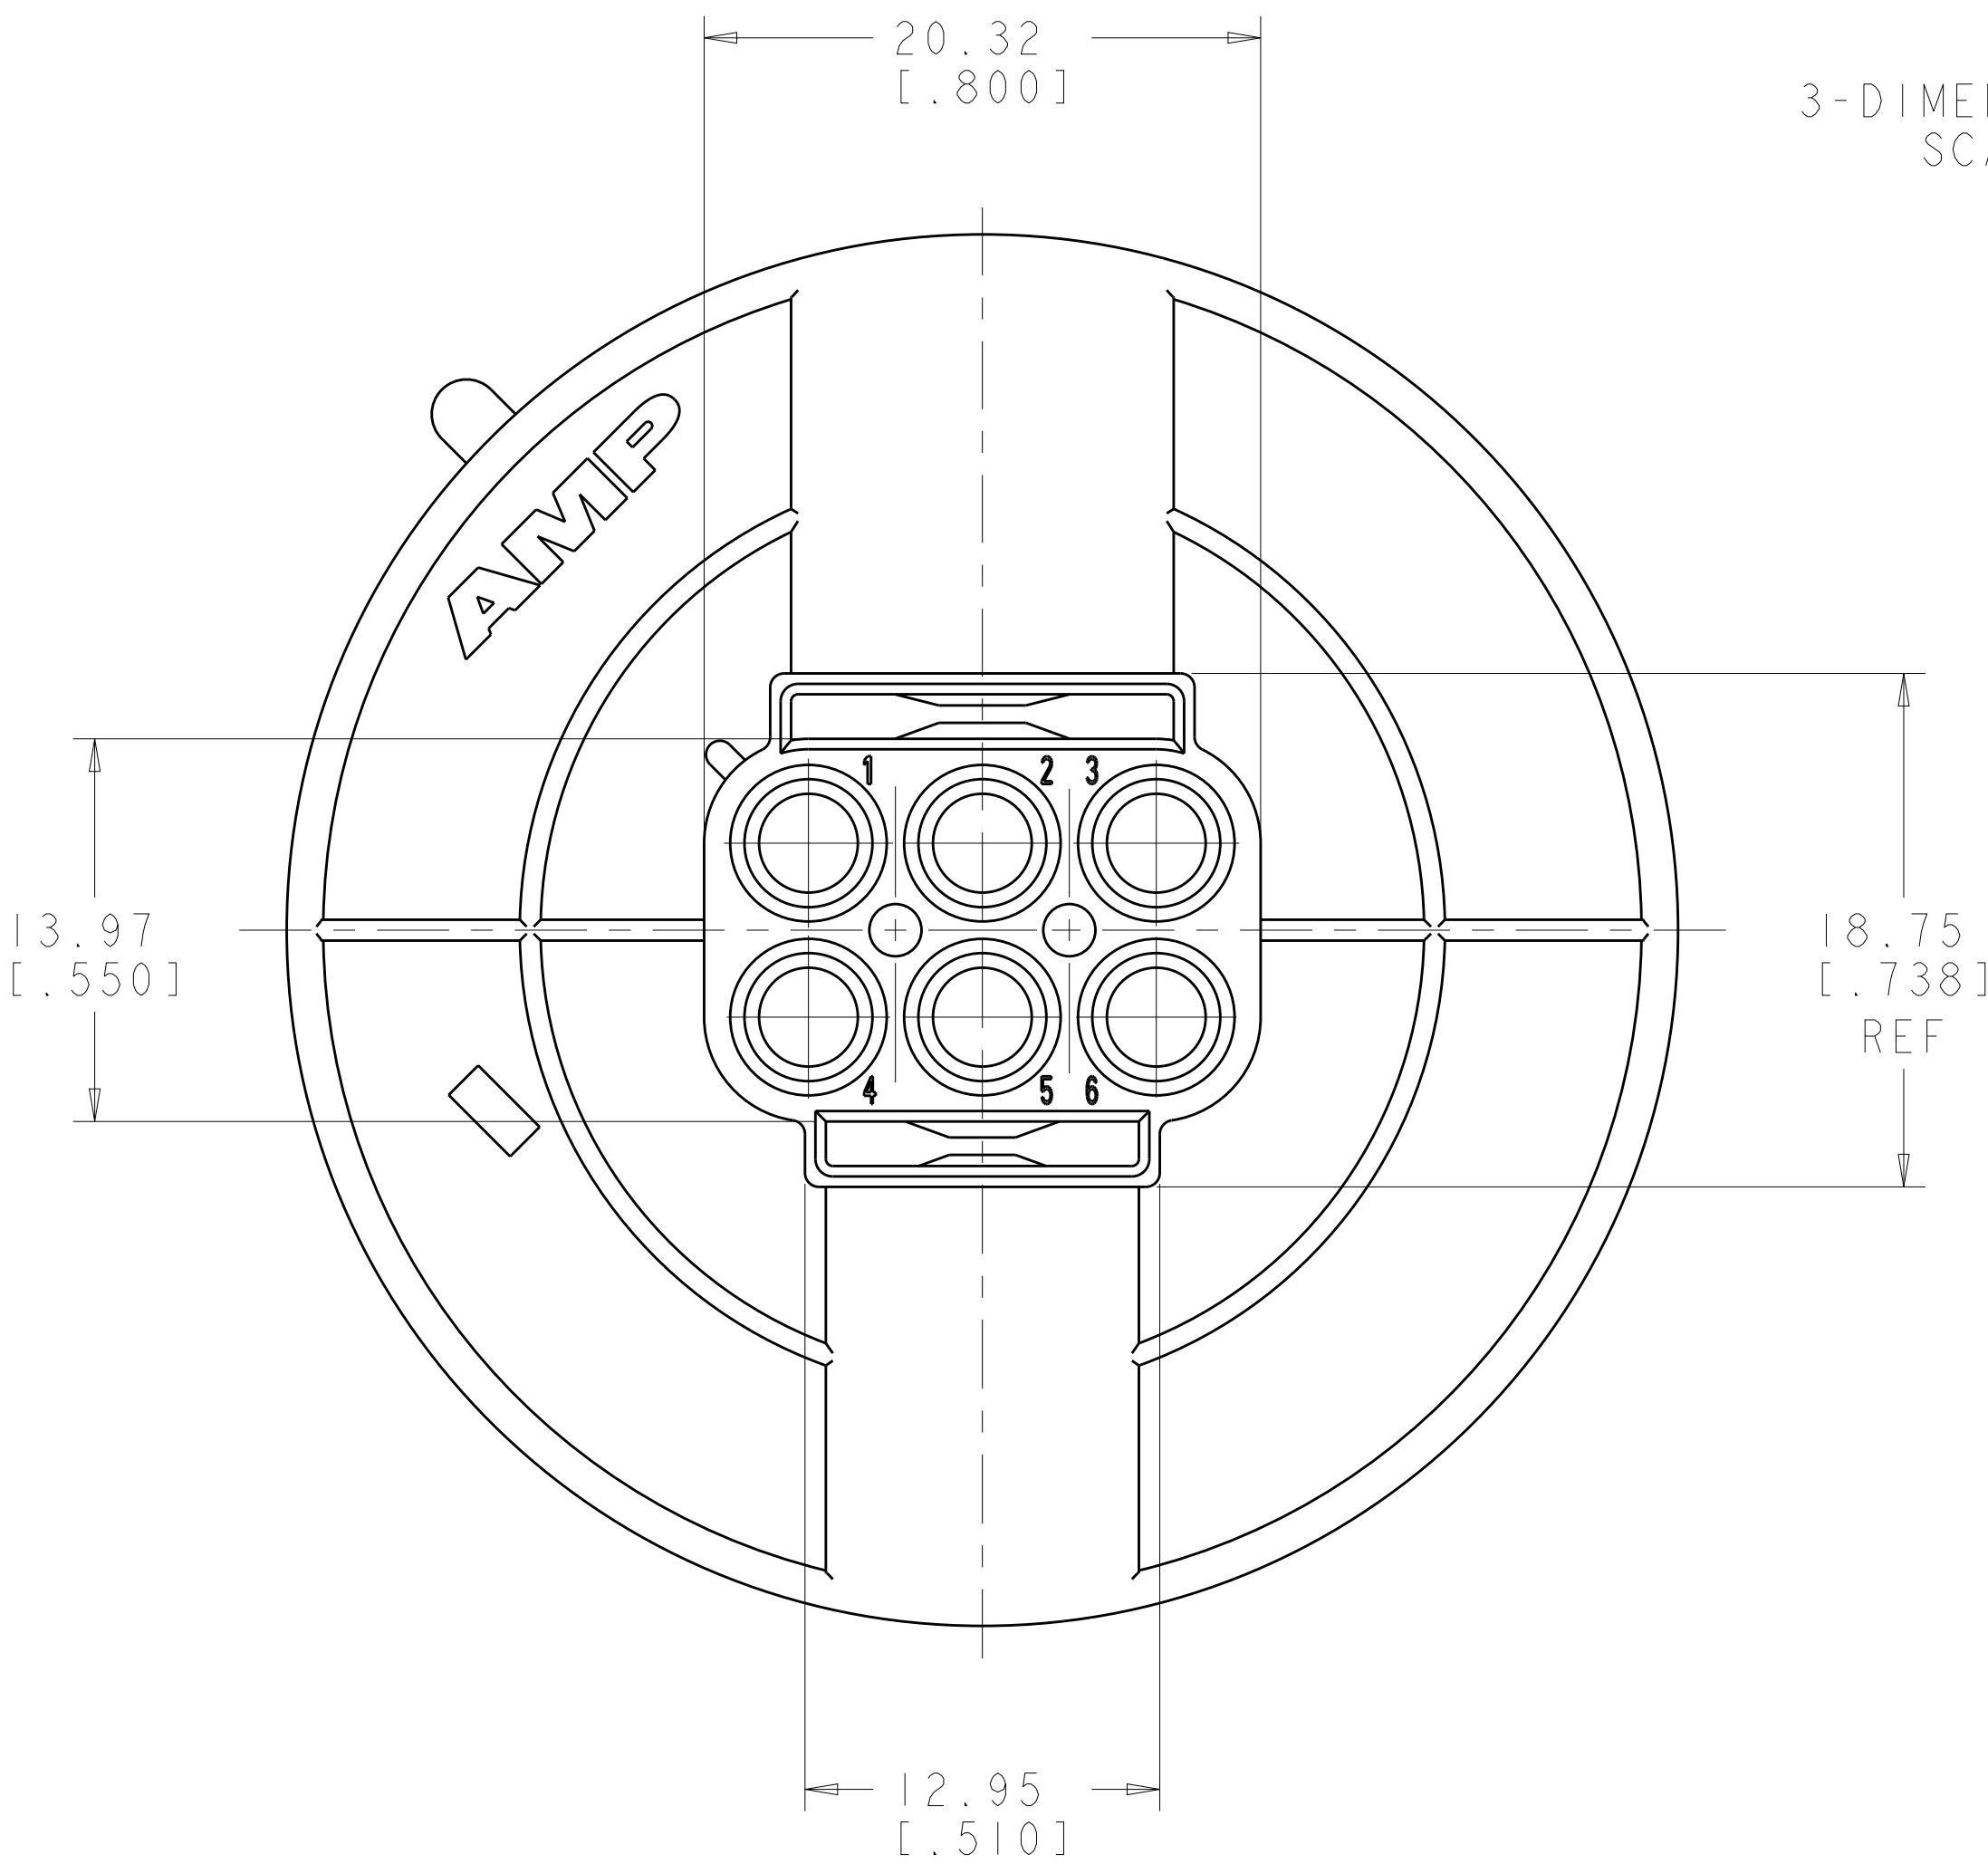

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	RAGHAVENDRA		16JUN2011	 TE Connectivity	
DIMENSIONS:		CHK	MICHILUTTI		16JUN2011		
mm[INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	MICHILUTTI		16JUN2011
		0 PLC ±		PRODUCT SPEC			NAME
		1 PLC ±		APPLICATION SPEC			
		2 PLC ±					
		3 PLC ±					
4 PLC ±		ANGLES		30° ±			SIZE
MATERIAL		FINISH		WEIGHT			
-		-		-			DRAWING NO
Customer Drawing		SCALE		SHEET			
		3:1		1			REV